



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ  
 CURRENT RANGE - 1000-1200A  
 STANDARDS - UL508A  
 SUITABLE FOR USE AS SERVICE EQUIPMENT  
 GROUND FAULT PROTECTION INCLUDED  
 ENCLOSURE RATING - NEMA 3R  
 REF ES11BTS3B  
 EST SHIPPING WEIGHT - 900 LBS

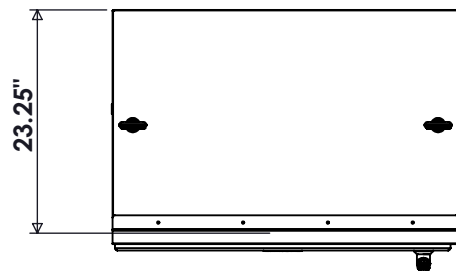


TOP VIEW

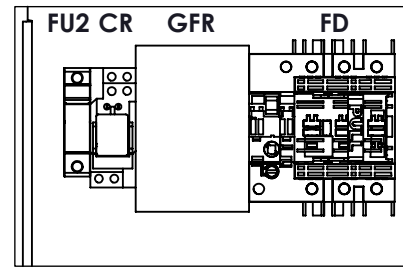


DETAIL A

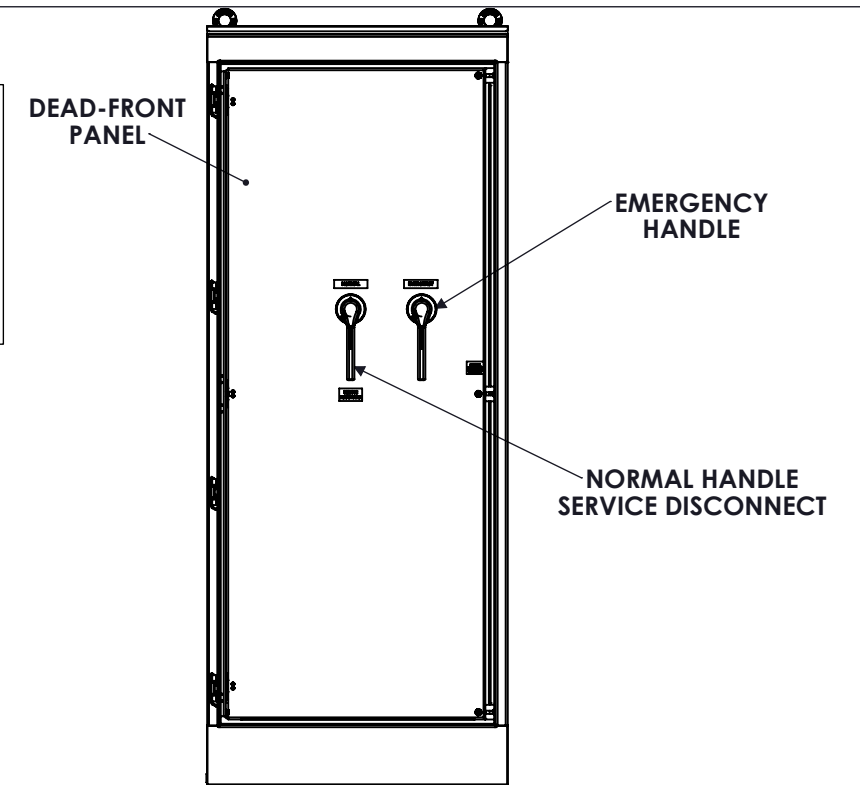


FRONT VIEW  
DOOR REMOVED

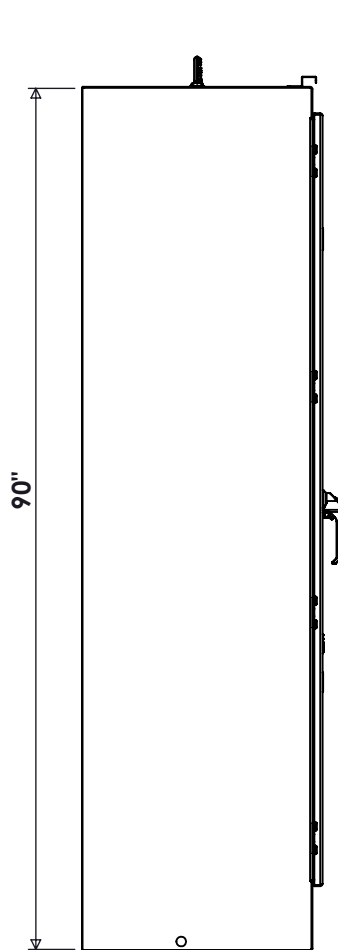


SIDE VIEW

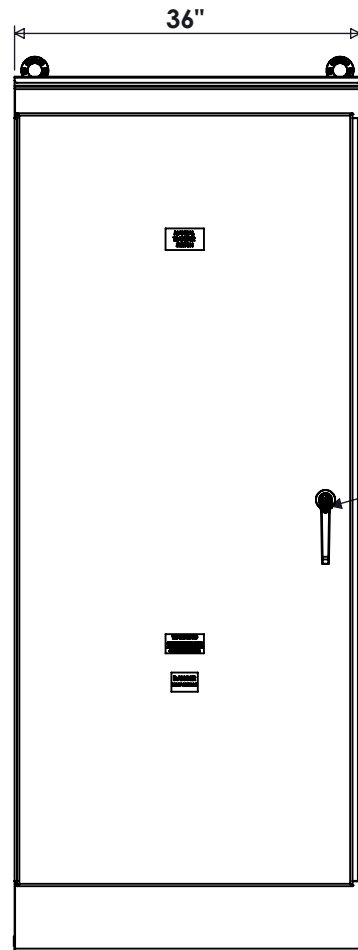


FRONT VIEW

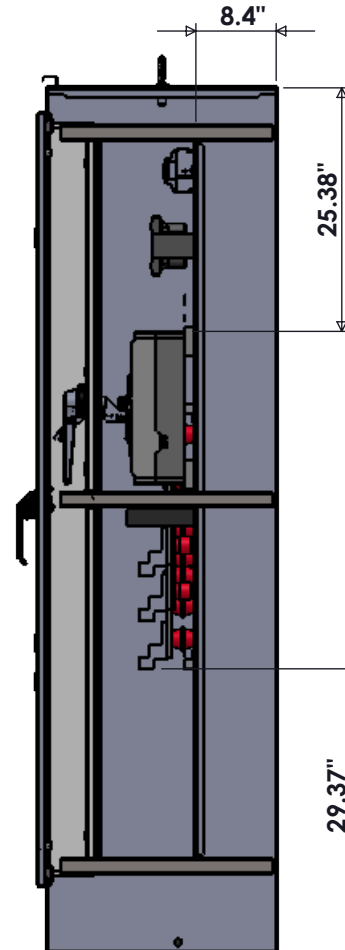

SIDE VIEW

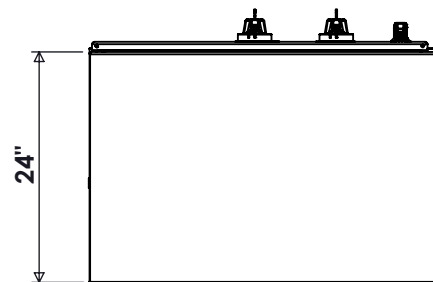

BOTTOM VIEW

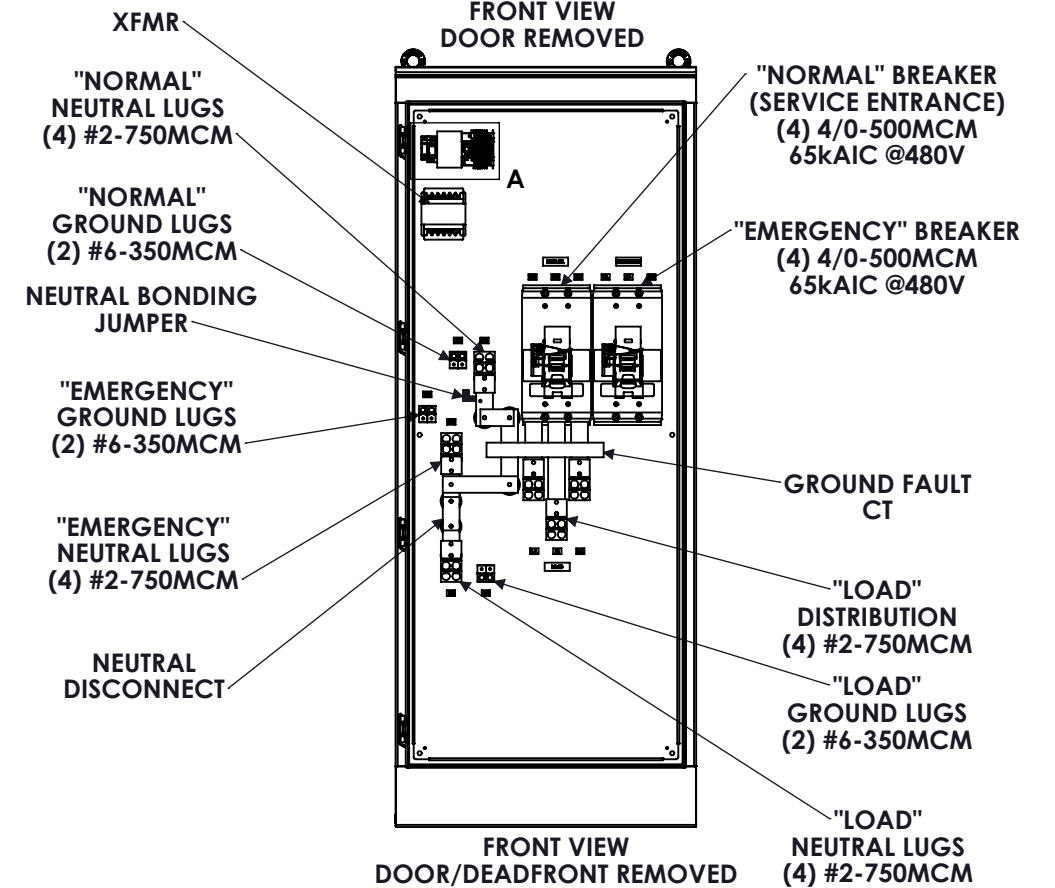

FRONT VIEW  
DOOR/DEADFRONT REMOVED

NOTE: BREAKERS ARE MECHANICALLY INTERLOCKED BY A WALKING BEAM MECHANISM. ONLY ONE CAN BE ENERGIZED AT A TIME

9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

1000-1200A BREAKER-BREAKER TRANSFER SWITCH			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	2/8/17	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUIL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	<b>DIMENSIONAL</b>
DRAWING NUMBER	<b>BTS1200N3RSE3B</b>