



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
 CURRENT RANGE - 100-225A
 STANDARDS - UL508A
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF ES11BTS3A
 EST SHIPPING WEIGHT - 150 LBS

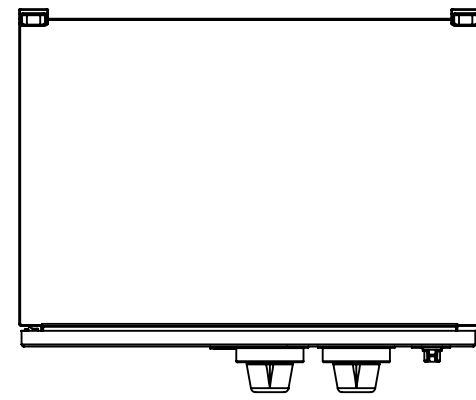


TOP VIEW

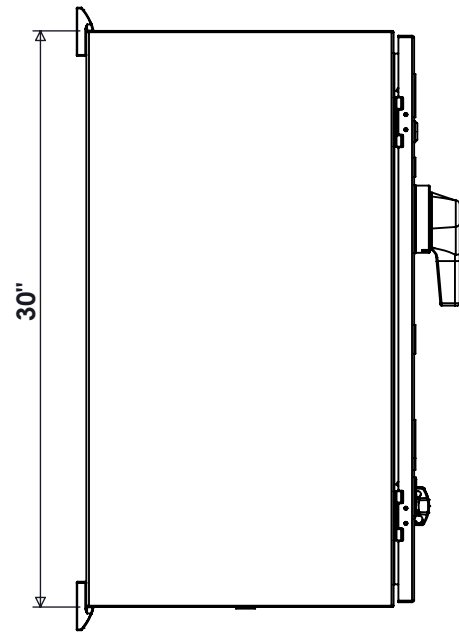


SIDE VIEW

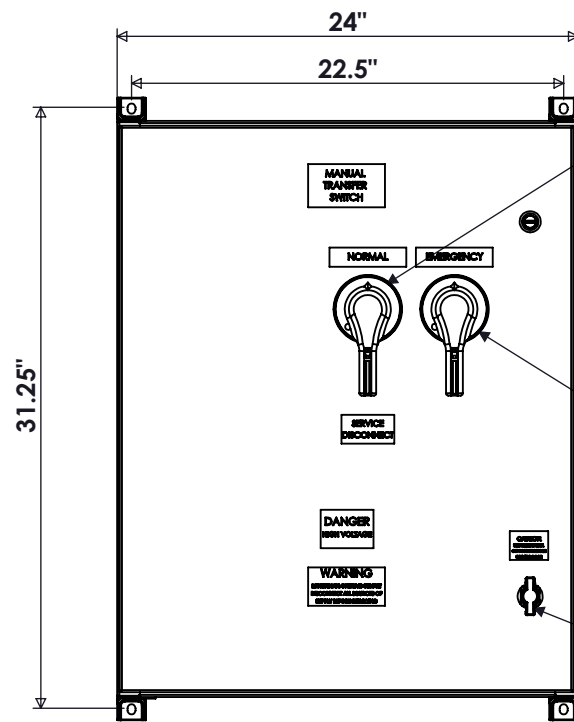

FRONT VIEW

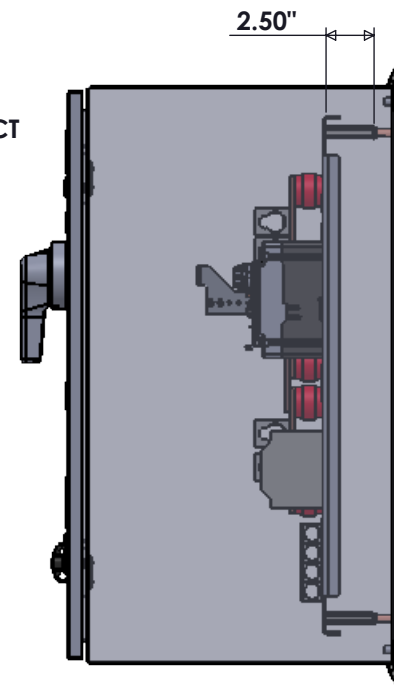

SIDE VIEW

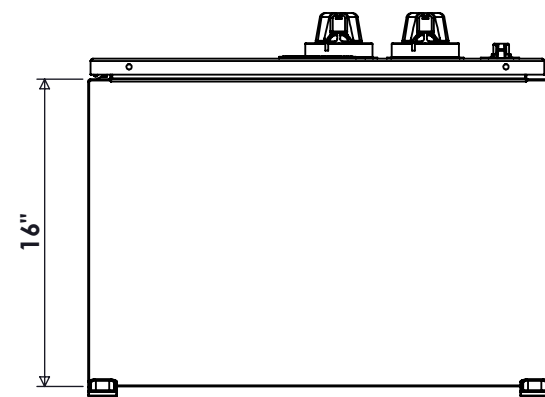

BOTTOM VIEW


NOTE: BREAKERS ARE MECHANICALLY INTERLOCKED BY A WALKING BEAM MECHANISM. ONLY ONE CAN BE ENERGIZED AT A TIME

"NORMAL" BREAKER (SERVICE ENTRANCE)
 (1) #4-4/0 AWG
 65kAIC @ 240V
 35kAIC @ 480V

NEUTRAL LUGS (2) #2-750MCM

NEUTRAL DISCONNECT

GROUND LUGS (1) #6-350MCM

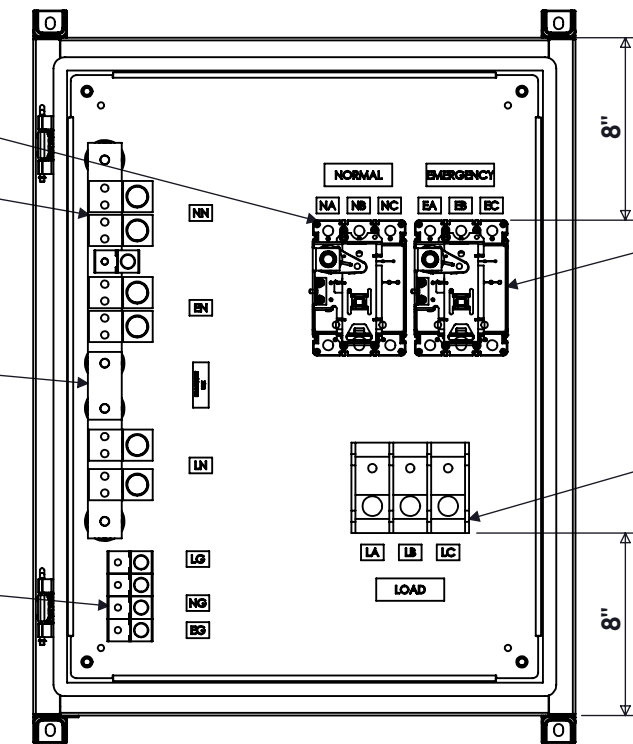

FRONT VIEW DOOR REMOVED

"EMERGENCY" BREAKER
 (1) #4-4/0 AWG
 65kAIC @ 240V
 35kAIC @ 480V

"LOAD" DISTRIBUTION
 (1) #6-500MCM



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

100-225A BREAKER-BREAKER TRANSFER SWITCH			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	2/8/17	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUIL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	DIMENSIONAL
DRAWING NUMBER	BTS225N4XSE3A