



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ  
 CURRENT RANGE - 250-400A  
 STANDARDS - UL508A  
 SUITABLE FOR USE AS SERVICE EQUIPMENT  
 ENCLOSURE RATING - NEMA 4X  
 TYPE 316 STAINLESS STEEL  
 REF ES11BTS3A  
 EST SHIPPING WEIGHT - 300 LBS

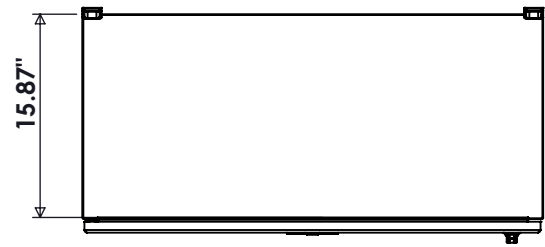


TOP VIEW

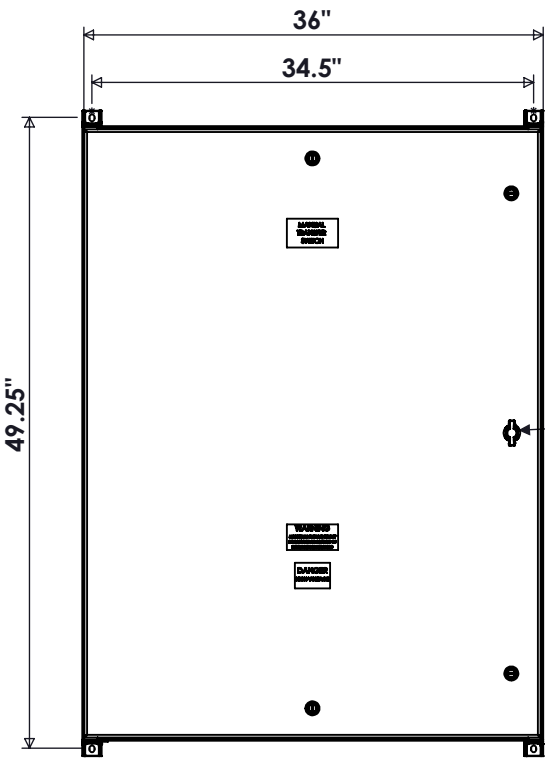


FRONT VIEW

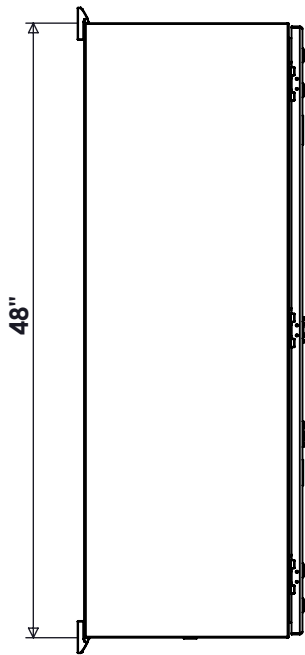

SIDE VIEW

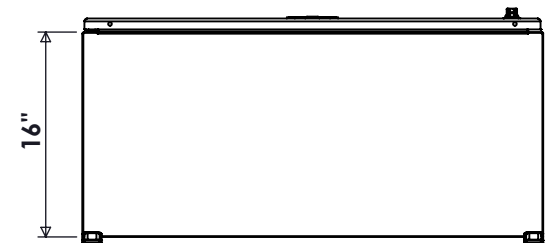


BOTTOM VIEW

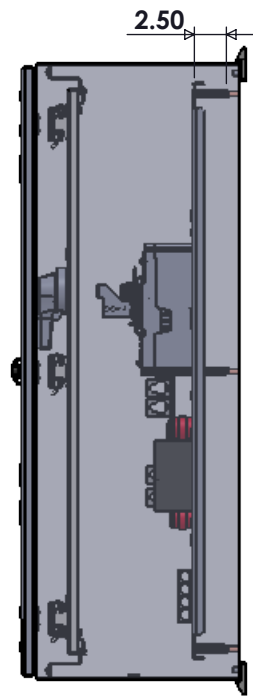


SIDE VIEW

NOTE: BREAKERS ARE MECHANICALLY INTERLOCKED BY A WALKING BEAM MECHANISM. ONLY ONE CAN BE ENERGIZED AT A TIME

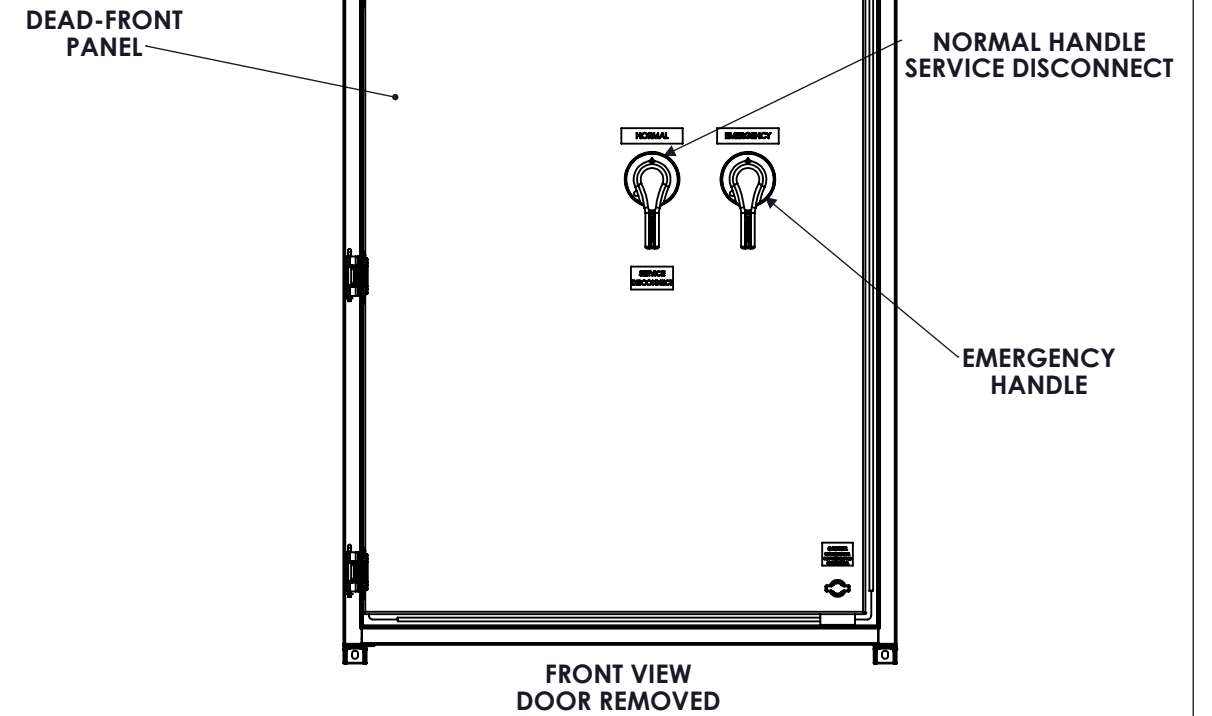

FRONT VIEW DOOR REMOVED

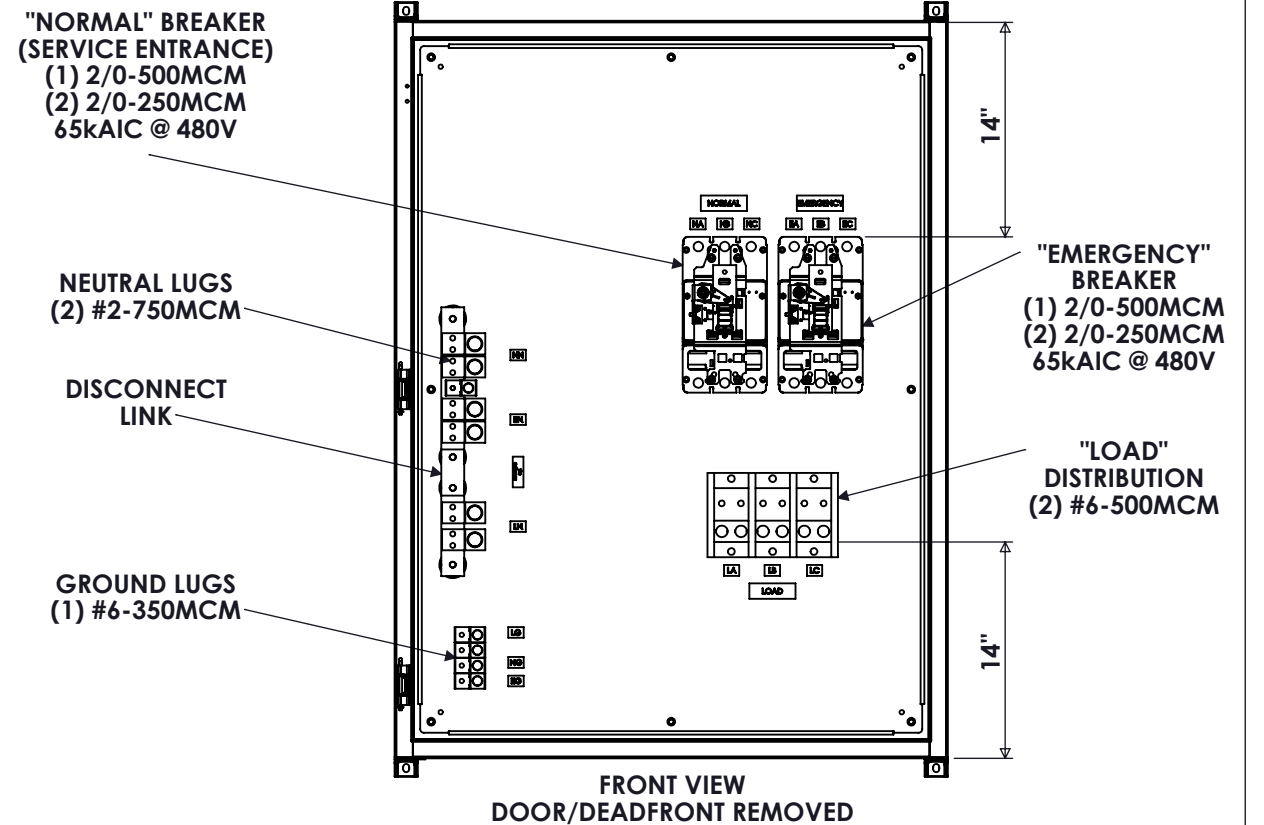

FRONT VIEW DOOR/DEADFRONT REMOVED

250-400A BREAKER-BREAKER TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	2/8/17	CHECKED	
			SUP. NO	
			SUP. BY NO	
			PANEL NO	
			BUIL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE	<b>DIMENSIONAL</b>
DRAWING NUMBER	<b>BTS400N4XDSE3A</b>



9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM