


SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Ø
 RATED CURRENT - 600A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 3R
 EST. SHIPPING WEIGHT - 800LBS

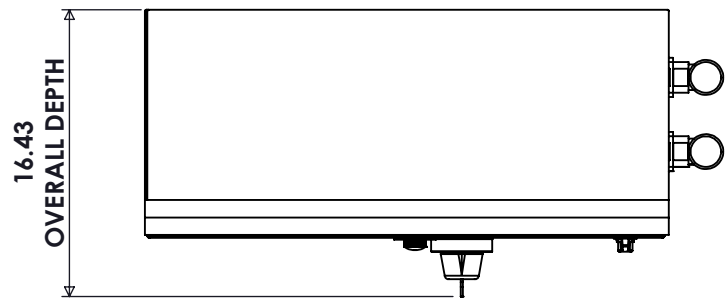


TOP VIEW

CONNECTIONS


L1,L2,L3 - (2) 400-500MCM
 T1,T2,T3 - (2) 400-500MCM
 N - (2) #2-600MCM
 G - (1) #6-350MCM

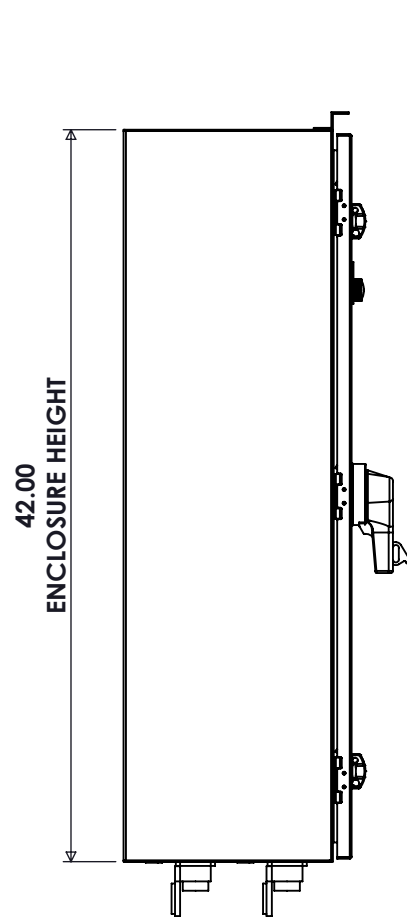


SIDE VIEW

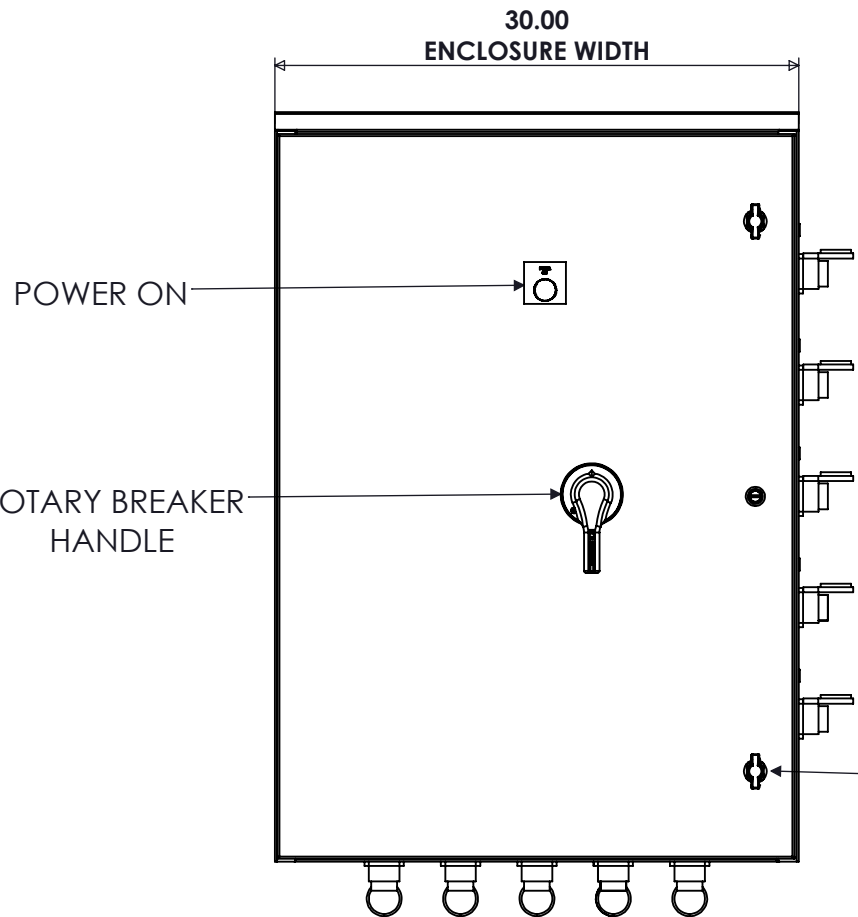

FRONT VIEW

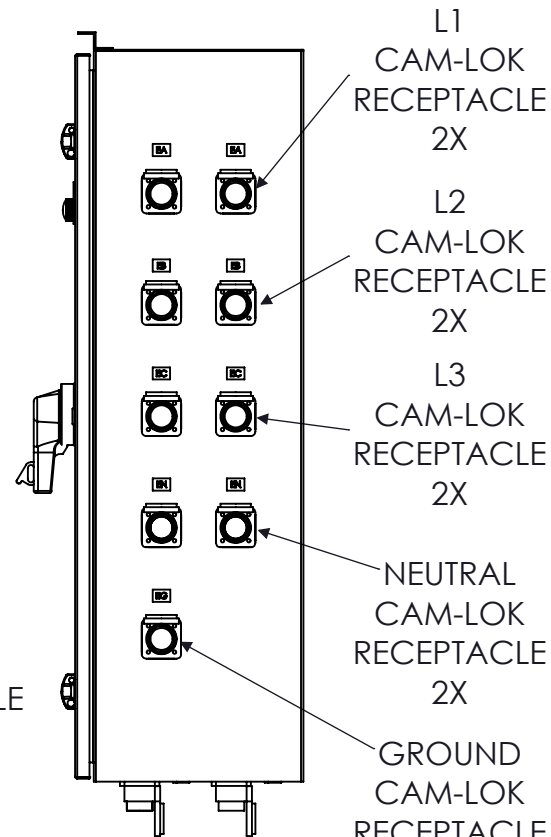

SIDE VIEW

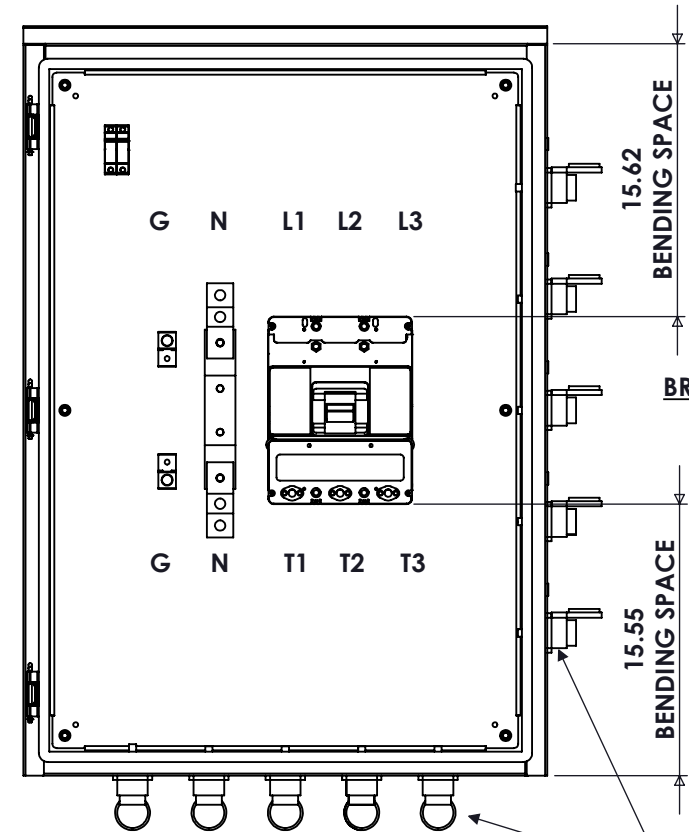


FRONT VIEW DOOR REMOVED

BREAKER INFORMATION

600A FRAME
 600A TRIP
 65kAIC @ 480V

CAM-LOCK AVAILABLE ON BOTTOM OR SIDE OF ENCLOSURE

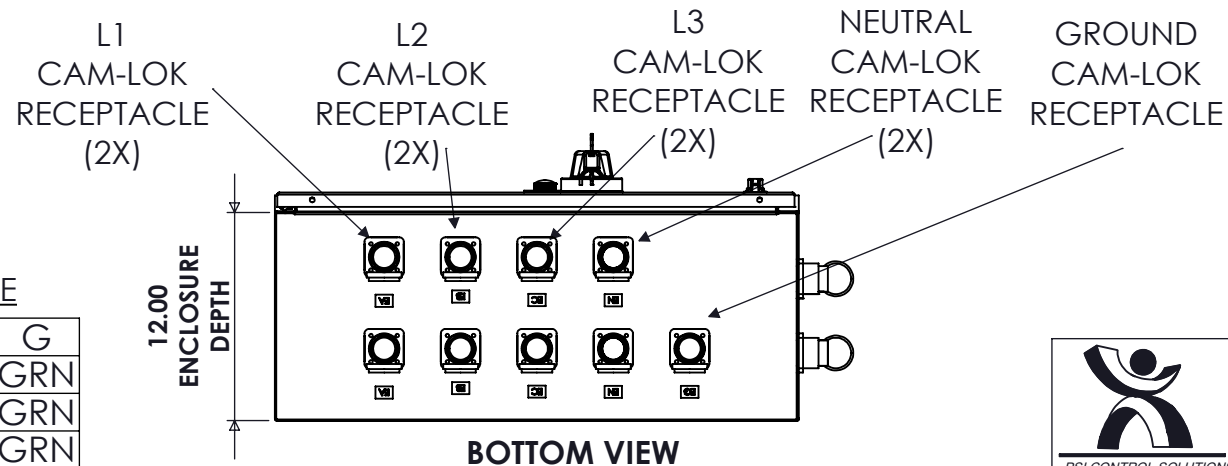

BOTTOM VIEW

RECEPTACLE COLOR SCHEME

	L1	L2	L3	N	G
240VAC	BLK	RED	BLU	WHT	GRN
480VAC	BRN	ORG	YEL	WHT	GRN
600VAC	BLK	BLK	BLK	WHT	GRN

600A ENCLOSED COMPANY SWITCH WITH CAM-LOCKS

REV	DESCRIPTION	DATE	DRAWN	J.GONZALEZ
0	ORIGINAL RELEASE	6/7/17	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	DIMENSIONAL
			PANEL NO	DRAWING NUMBER
			BUL. NO	CS600N3R3
			GROUP NO	
			ORDER NO	



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM