



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
RATED CURRENT - 1200A
STANDARDS - UL508A
ENCLOSURE RATING - NEMA 4
REF. ES11FD3
FUSE CLASS - "L"
ENDURANCE - 3500 CYCLES
EST. SHIPPING WEIGHT - 600LBS

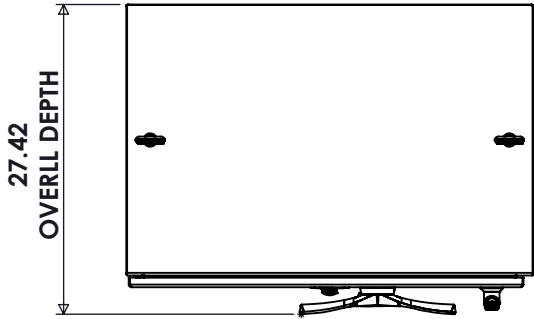


TOP VIEW

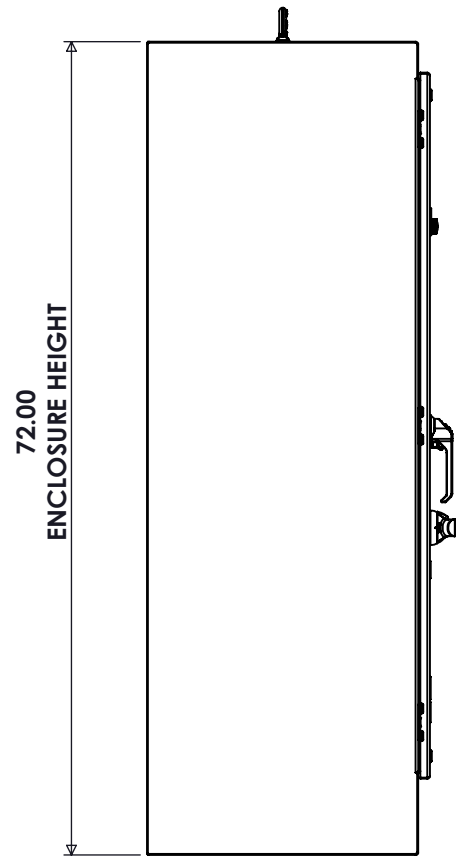


SIDE VIEW

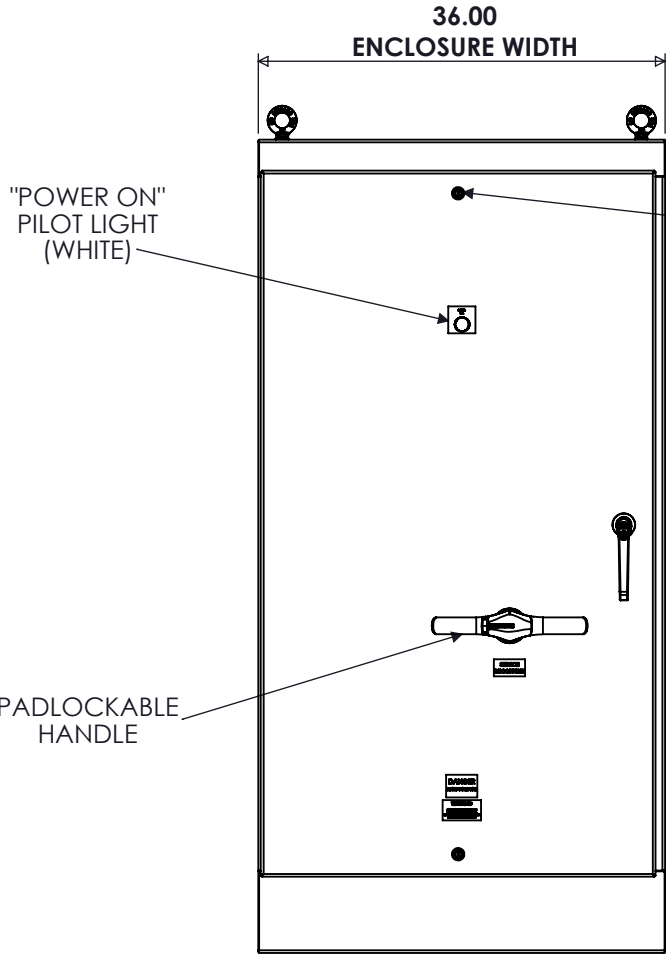

FRONT VIEW

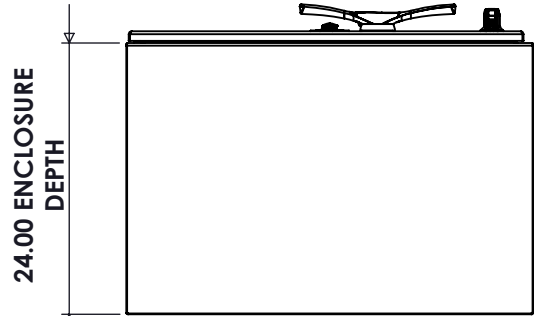

BOTTOM VIEW

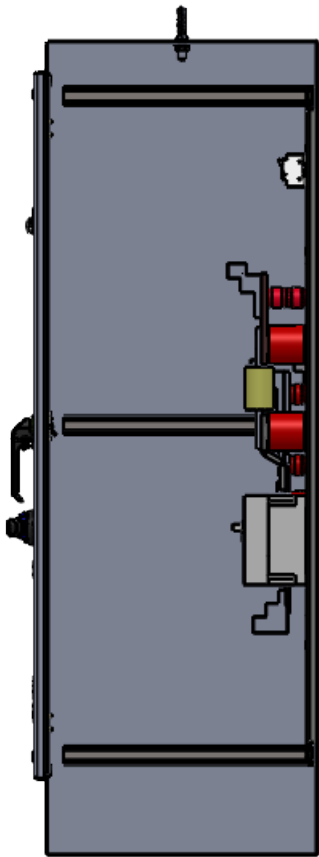

SIDE VIEW

PILOT LIGHT
FUSEBLOCK
HOLDER (2X)

LINE LUG
CONNECTIONS
(4) #2-600MCM
PER PHASE


NEUTRAL LUG
CONNECTIONS
(4) #2-600MCM
PER SOURCE

GROUND LUG
CONNECTIONS
(1) #2-750MCM
PER SOURCE

BONDING
JUMPER

NEUTRAL
DISCONNECT

LINE LUG
CONNECTIONS
(4) #2-600MCM
PER PHASE

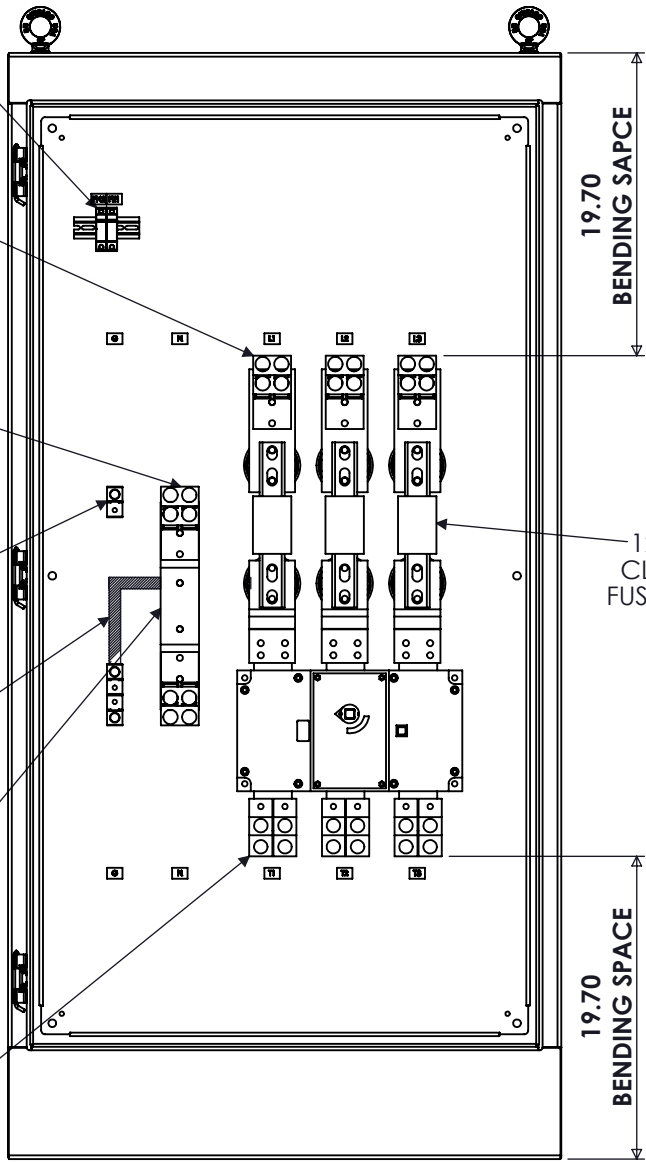

FRONT VIEW
DOOR REMOVED

1200A
CLASS L
FUSES (3X)

NOTE: NEUTRAL KIT ONLY PRESENT IF PURCHASED



9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

1200A, 3-POLE, NEMA 4 ENCLOSED FUSIBLE DISCONNECT

REV	DESCRIPTION	DATE	DRAWN	C. JUNG
0	ORIGINAL RELEASE	1/29/18	CHECKED	
1	NEUTRAL CHANGED	3/16/22	SUP. NO	
			SUP. BY NO	
			PANEL NO	
			BUL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE
DIMENSIONAL

DRAWING NUMBER
FD1200LN4