



SPECIFICATIONS

MAX VOLTAGE - 600VAC 3Φ
RATED CURRENT - 1200A
STANDARDS - UL508A
ENCLOSURE RATING - NEMA 4X
REF. ES11FD3
FUSE CLASS - "L"
ENDURANCE - 3500 CYCLES
EST. SHIPPING WEIGHT - 600LBS

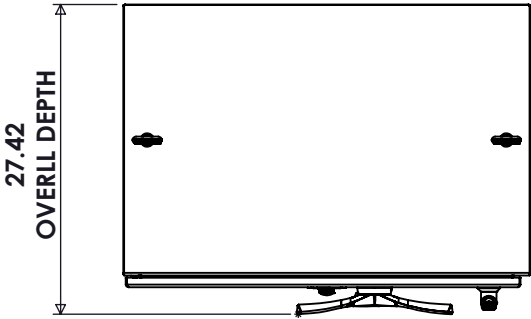


TOP VIEW

36.00
ENCLOSURE WIDTH

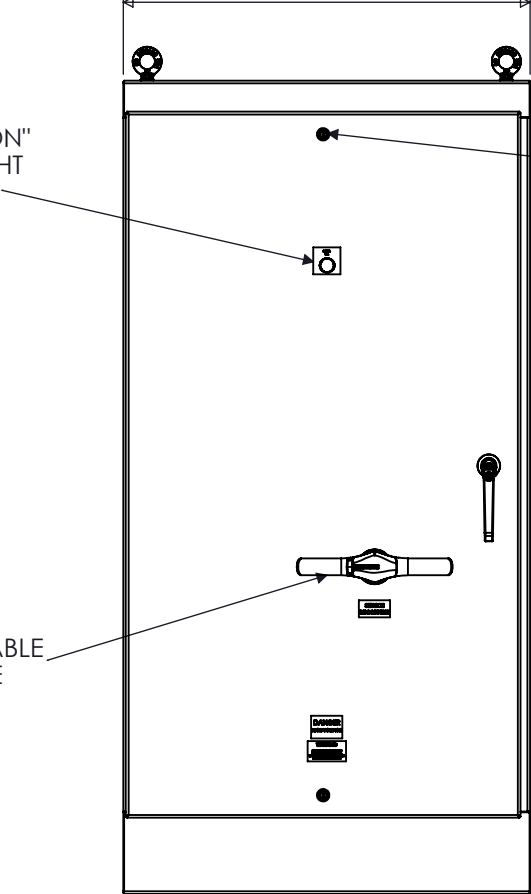


FRONT VIEW

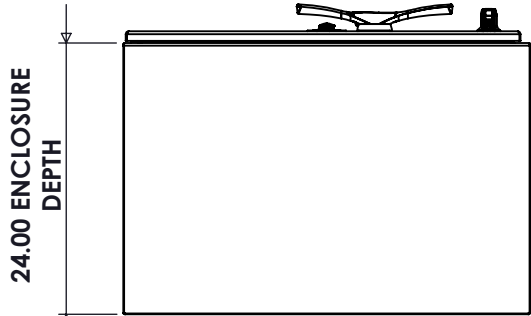

BOTTOM VIEW

24.00 ENCLOSURE
DEPTH

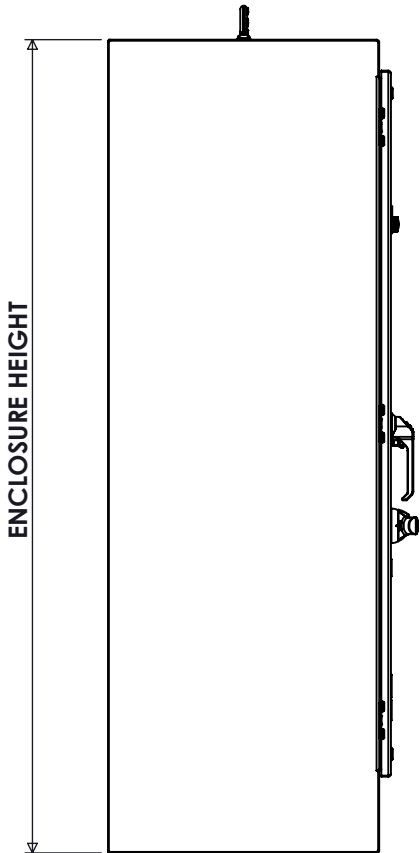


SIDE VIEW

72.00
ENCLOSURE HEIGHT

"POWER ON"
PILOT LIGHT
(WHITE)

PADLOCKABLE
HANDLE

PADLOCKABLE
LATCH (2X)

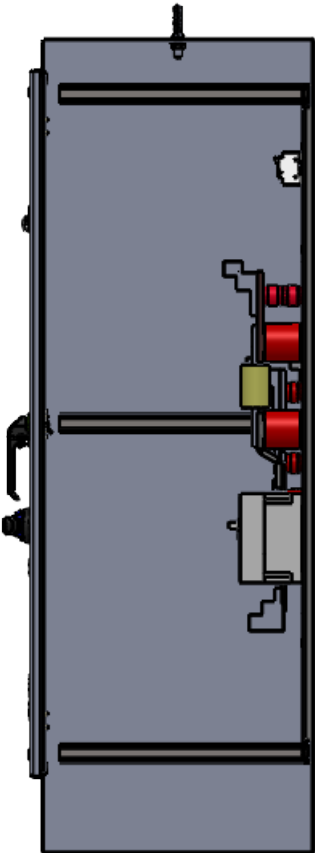

SIDE VIEW

NOTE: NEUTRAL KIT ONLY PRESENT IF PURCHASED



9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

PILOT LIGHT
FUSEBLOCK
HOLDER (2X)

LINE LUG
CONNECTIONS
(4) #2-600MCM
PER PHASE


NEUTRAL LUG
CONNECTIONS
(4) #2-600MCM
PER SOURCE

GROUND LUG
CONNECTIONS
(1) #2-750MCM
PER SOURCE

BONDING
JUMPER

NEUTRAL
DISCONNECT

LINE LUG
CONNECTIONS
(4) #2-600MCM
PER PHASE

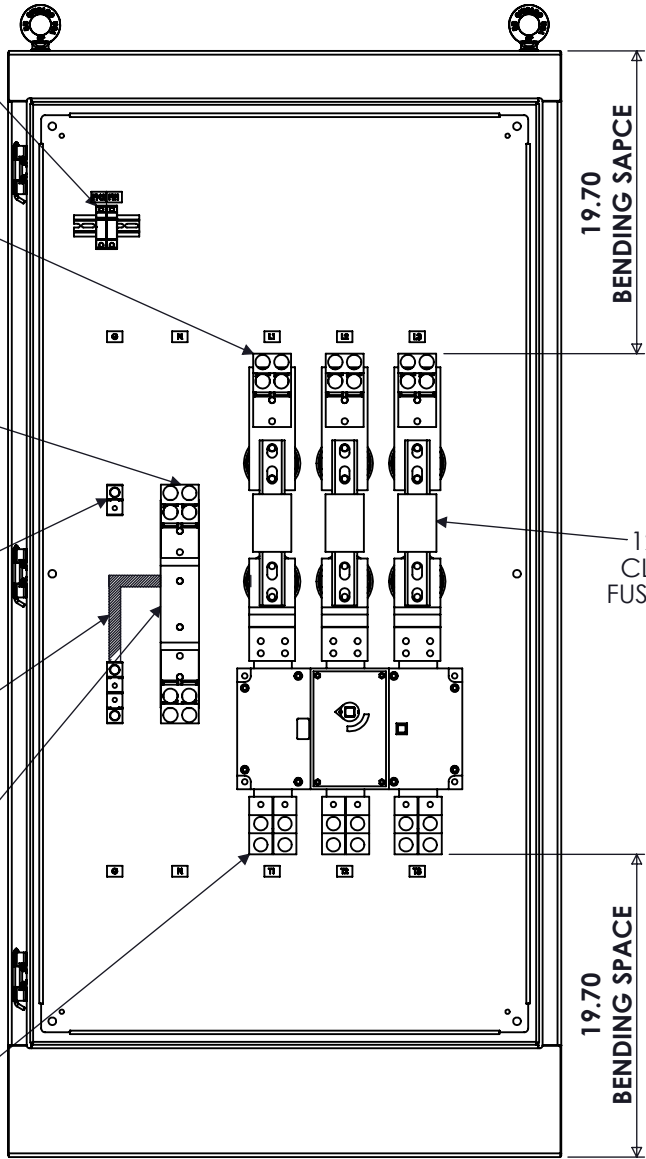

FRONT VIEW
DOOR REMOVED

19.70
BENDING SPACE

1200A
CLASS L
FUSES (3X)

19.70
BENDING SPACE

1200A, 3-POLE, NEMA 4X ENCLOSED FUSIBLE DISCONNECT

REV	DESCRIPTION	DATE	DRAWN	C. JUNG	
0	ORIGINAL RELEASE	1/29/18	CHECKED		
1	NEUTRAL CHANGED	3/16/22	SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUL. NO		FD1200LN4X
			GROUP NO		
			ORDER NO		