



SPECIFICATIONS


MAX VOLTAGE - 600VAC
 RATED CURRENT - 1600A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF. ES11FD3
 FUSE CLASS - L
 ENDURANCE - 2500 CYCLES
 EST. SHIPPING WEIGHT - 700LBS

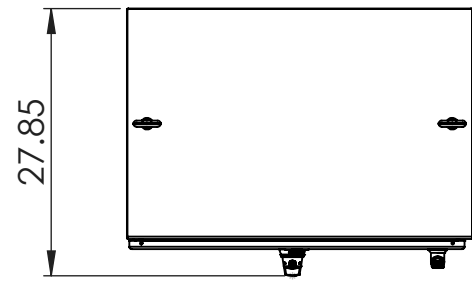


TOP VIEW

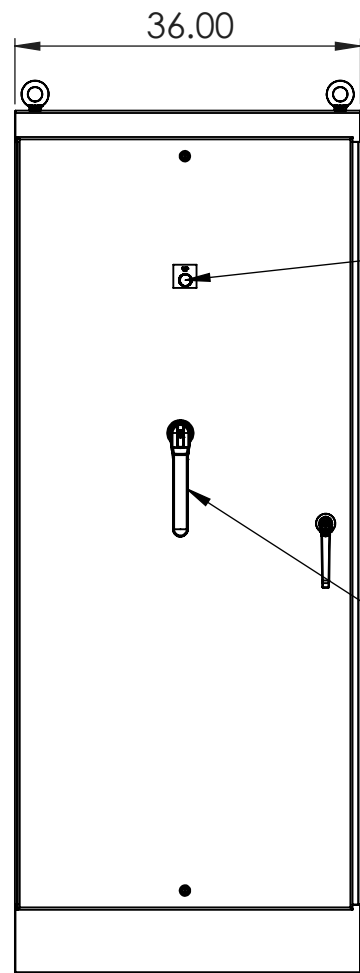


FRONT VIEW

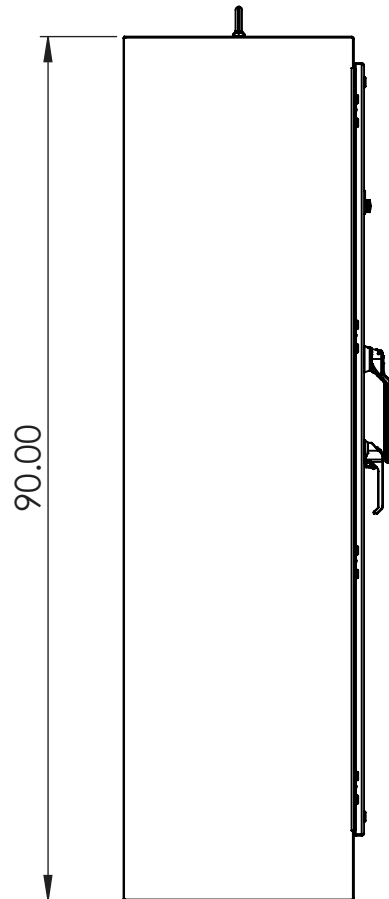

SIDE VIEW

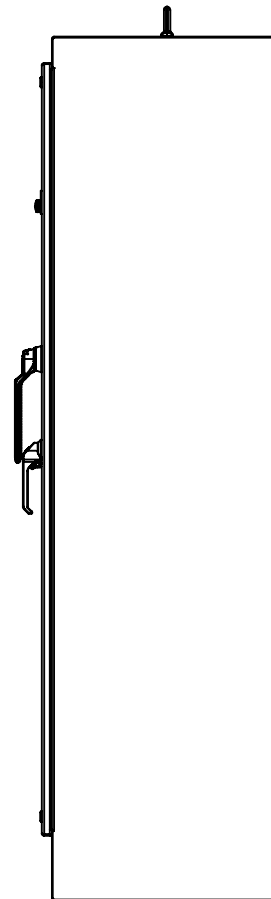


SIDE VIEW

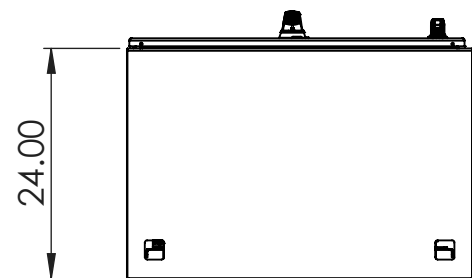

BOTTOM VIEW

CONNECTIONS

L1/L2/L3 - (8) #2-600MCM
 T1/T2/T3 - (6) #2-750MCM
 N - (6) #2-750MCM
 G - (1) #2-750MCM

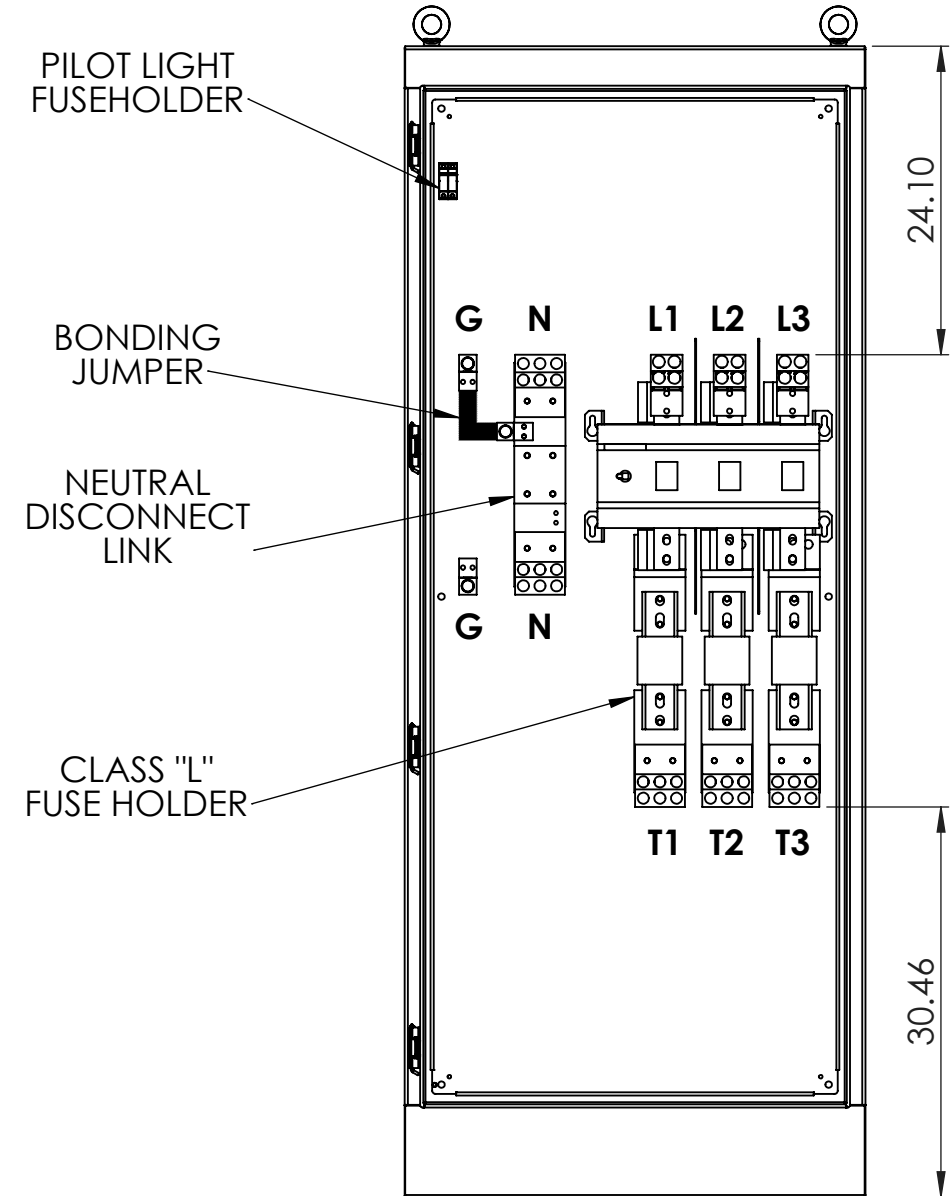

FRONT VIEW
DOOR REMOVED

NOTE: NEUTRAL KIT ONLY PRESENT IF PURCHASED



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

1600A NEMA 4X TYPE 316SS ENCLOSED FUSIBLE DISCONNECT			
REV	DESCRIPTION	DATE	DRAWN: D. DENNY
0	ORIGINAL RELEASE	6/21/19	CHECKED:
			SUP. NO:
			SUP. BY NO:
			PANEL NO:
			BUL. NO:
			GROUP NO:
			ORDER NO:
			DRAWING TYPE
			DIMENSIONAL
			DRAWING NUMBER
			FD1600LN4X