



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ.
 RATED CURRENT - 400A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4
 REF. ES11FD3
 FUSE CLASS - J
 ENDURANCE - 6000 CYCLES
 EST SHIPPING WEIGHT - 200LBS

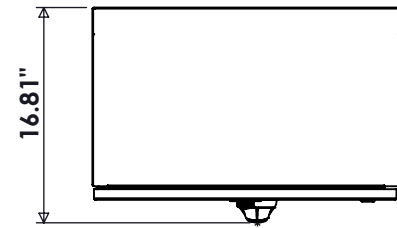


TOP VIEW

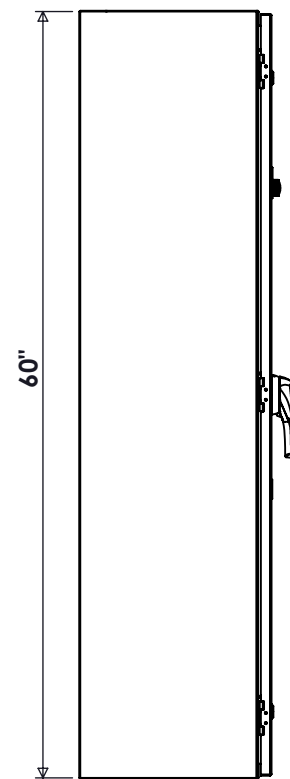


SIDE VIEW

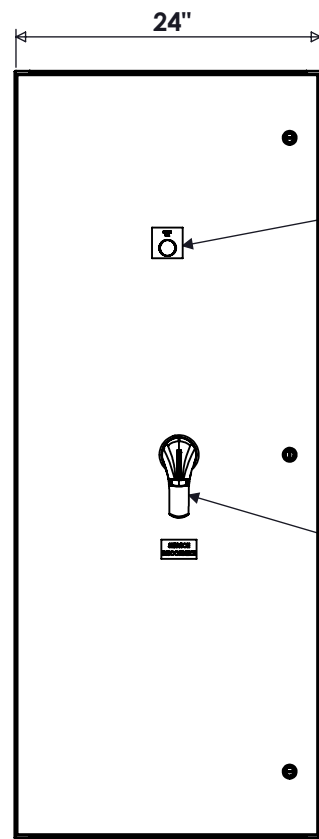

FRONT VIEW

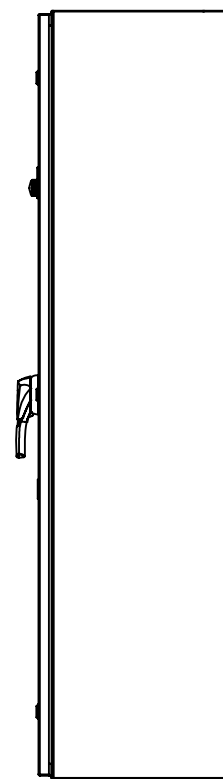


SIDE VIEW

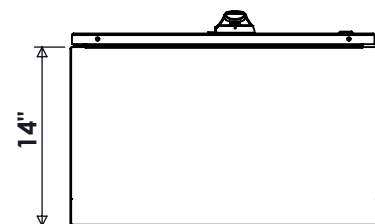

BOTTOM VIEW

CONNECTIONS

PHASE - (2) 1/0-250MCM / (1) #2-600MCM
 NEUTRAL - (2) 1/0-250MCM / (1) #2-750MCM
 GROUND - #6-350MCM

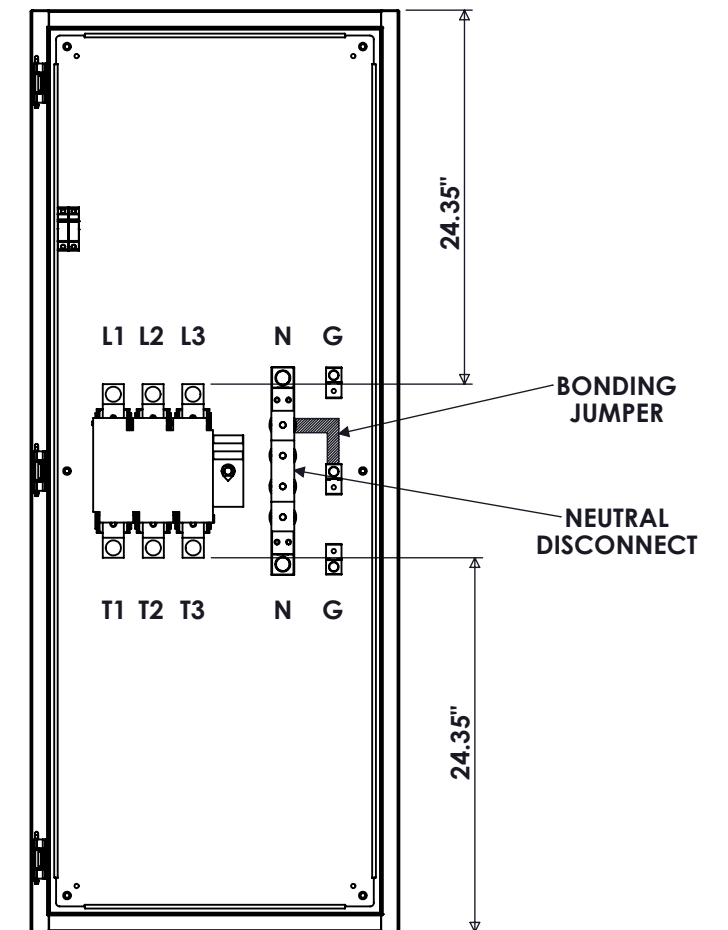

FRONT VIEW
DOOR REMOVED

NOTES

- 1: NEUTRAL KIT ONLY PRESENT IF PURCHASED
- 2: PANEL IS RATED SUITABLE FOR USE AS SERVICE EQUIPMENT WITH NEUTRAL KIT

 9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

400A ENCLOSED FUSIBLE DISCONNECT NEMA 4			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	6/13/17	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	DIMENSIONAL
DRAWING NUMBER	FD400JN4