



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ.  
 RATED CURRENT - 400A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4X  
 REF. ES11FD3  
 SWITCH SCCR - 200kA @ 480VAC  
 FUSE CLASS - J  
 ENDURANCE - 6000 CYCLES  
 EST SHIPPING WEIGHT - 200LBS

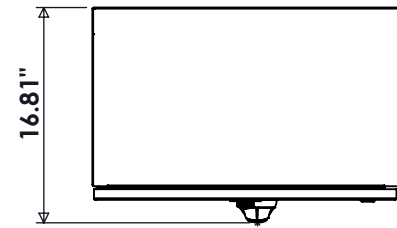


TOP VIEW

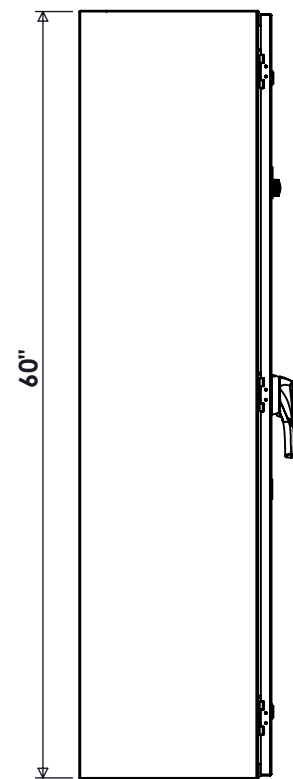


SIDE VIEW

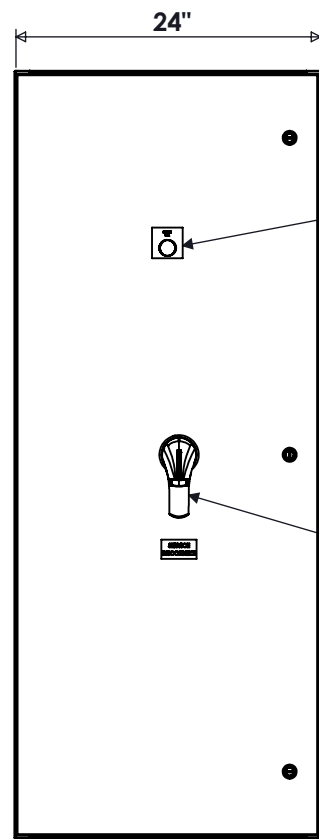

FRONT VIEW

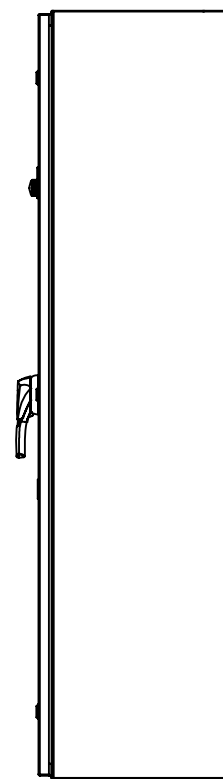


SIDE VIEW

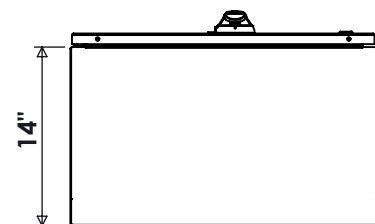

BOTTOM VIEW

**CONNECTIONS**

PHASE - (2) 1/0-250MCM / (1) #2-600MCM  
 NEUTRAL - (2) 1/0-250MCM / (1) #2-750MCM  
 GROUND - #6-350MCM

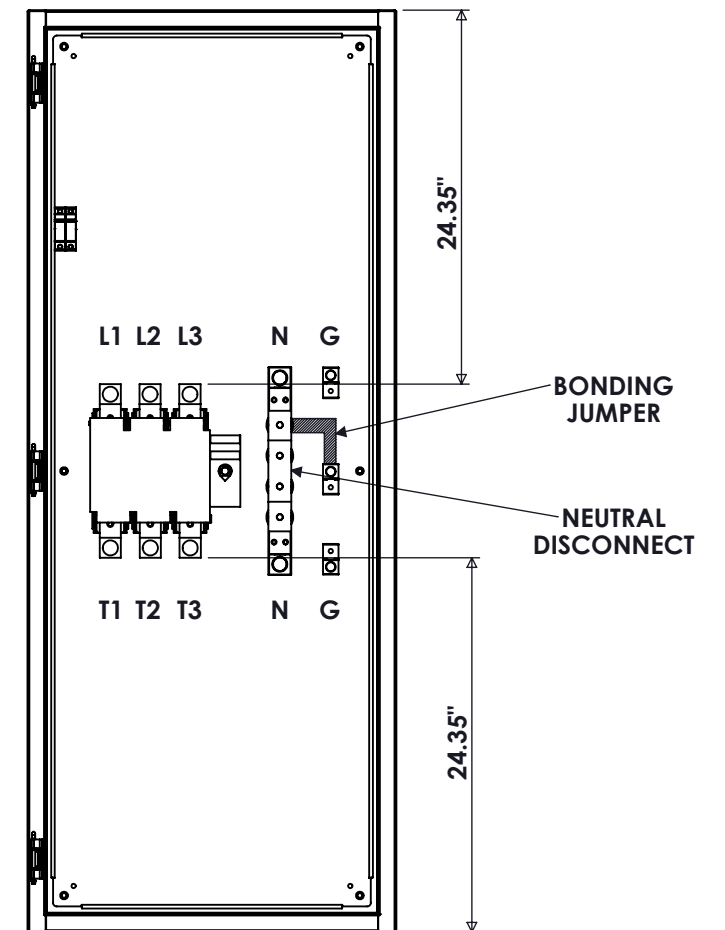

FRONT VIEW  
DOOR REMOVED

**NOTES**

- 1: NEUTRAL KIT ONLY PRESENT IF PURCHASED
- 2: PANEL IS RATED SUITABLE FOR USE AS SERVICE EQUIPMENT WITH NEUTRAL KIT

 9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

400A ENCLOSED FUSIBLE DISCONNECT NEMA 4X			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	6/13/17	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	<b>DIMENSIONAL</b>
DRAWING NUMBER	<b>FD400JN4X</b>