



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
 RATED CURRENT - 600A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4
 REF. ES11FD3
 FUSE CLASS - "J"
 ENDURANCE - 5000 CYCLES
 EST. SHIPPING WEIGHT - 225LBS

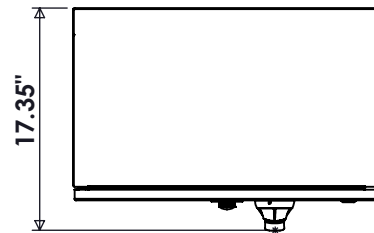


TOP VIEW

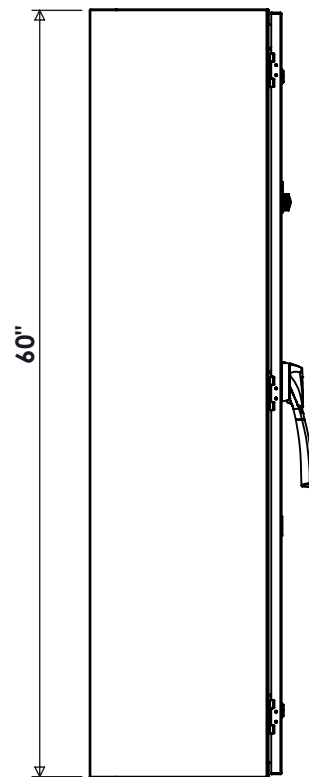


SIDE VIEW

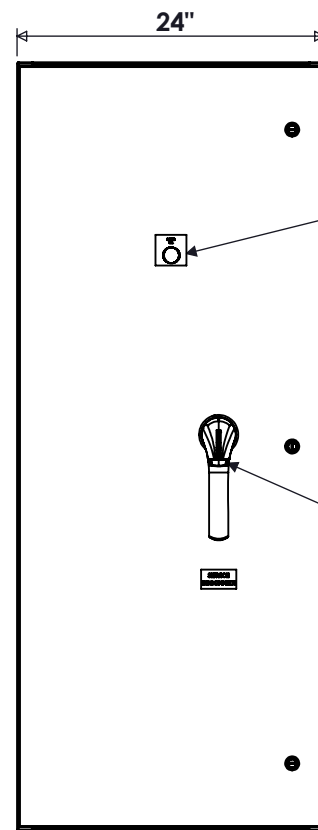

FRONT VIEW

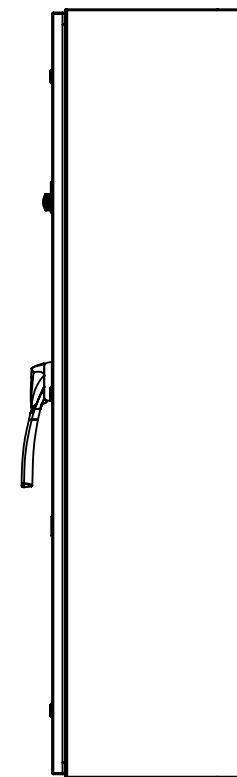


SIDE VIEW

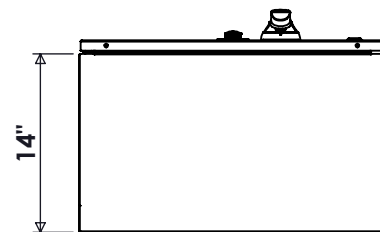

BOTTOM VIEW

CONNECTIONS

L1/L2/L3 - (2) #2-600MCM
 T1/T2/T3 - (2) #2-600MCM
 N - (2) #2-600MCM
 G - (1) #6-350MCM

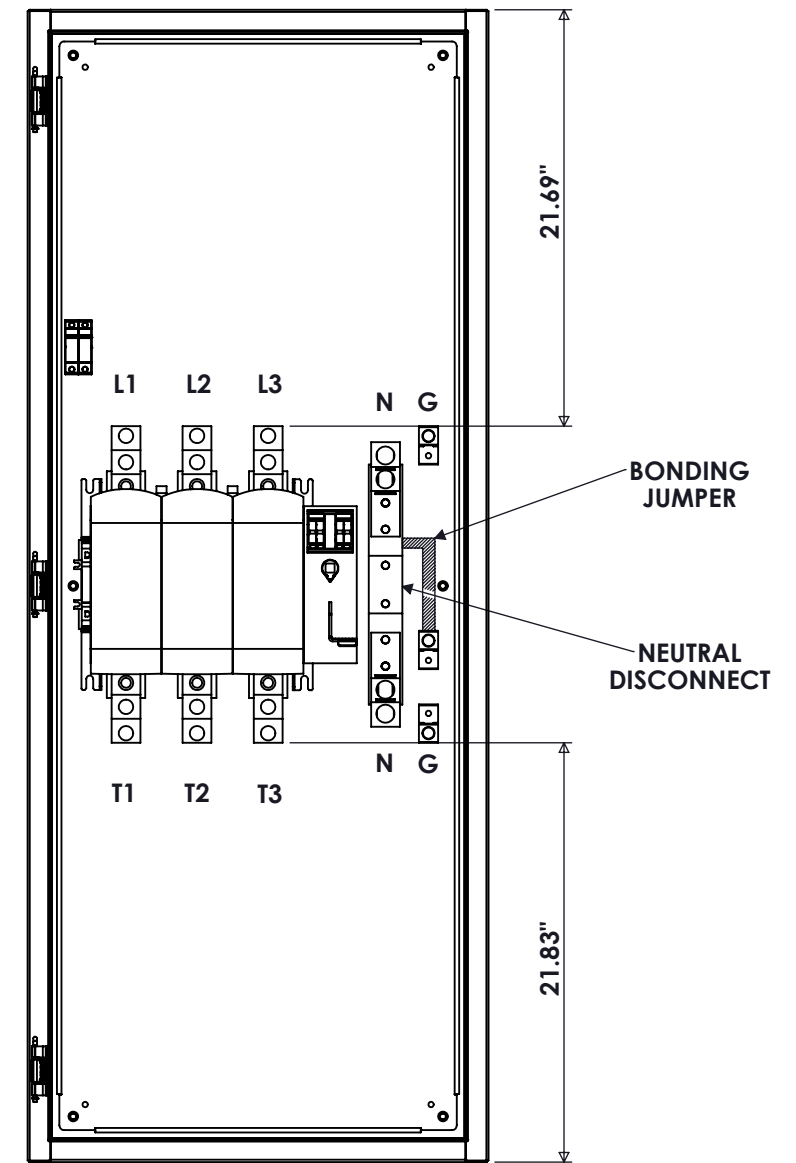

FRONT VIEW
DOOR REMOVED

NOTES

- 1: NEUTRAL KIT ONLY PRESENT IF PURCHASED
- 2: PANEL IS RATED SUITABLE FOR USE AS SERVICE EQUIPMENT WITH NEUTRAL KIT

600A ENCLOSED FUSIBLE DISCONNECT NEMA 4

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED
0	ORIGINAL RELEASE	11/14/16			
					SUP. NO
					SUP. BY NO
					PANEL NO
					BUIL. NO
					GROUP NO
					ORDER NO

DRAWING TYPE
DIMENSIONAL

DRAWING NUMBER
FD600JN4



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM