



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
RATED CURRENT - 800A
STANDARDS - UL508A
ENCLOSURE RATING - NEMA 4X
TYPE 316 STAINLESS STEEL
REF. ES11FD3
FUSE CLASS - "L"
ENDURANCE - 5000 CYCLES
EST. SHIPPING WEIGHT - 225LBS

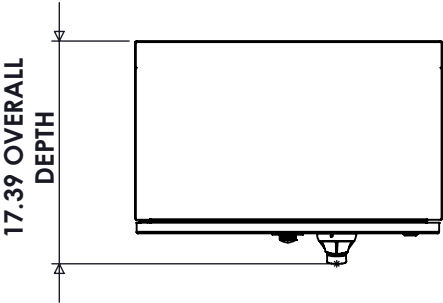


TOP VIEW

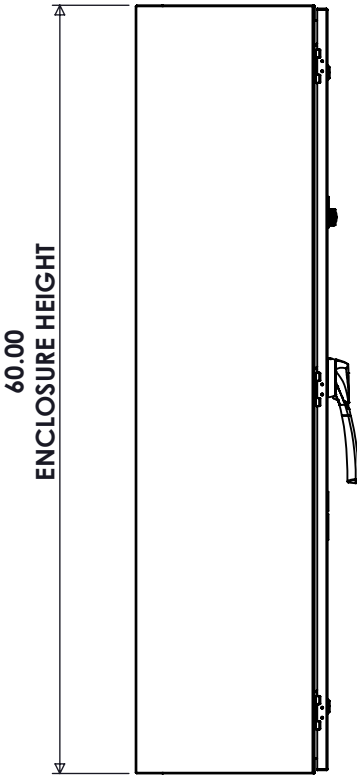


SIDE VIEW

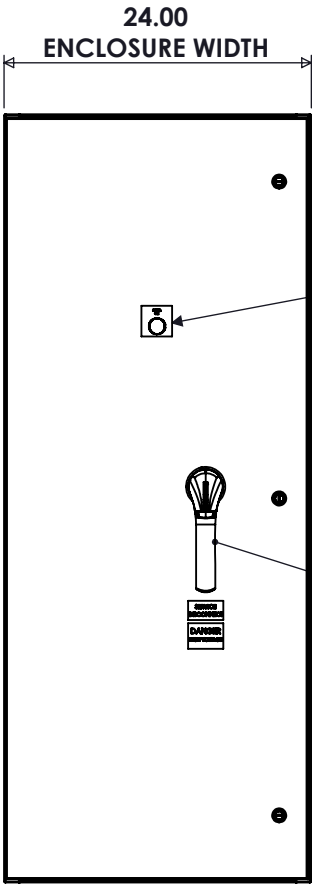

FRONT VIEW

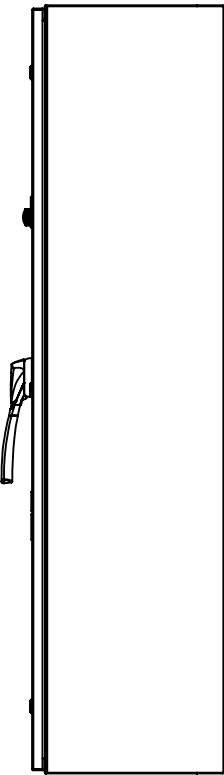


SIDE VIEW

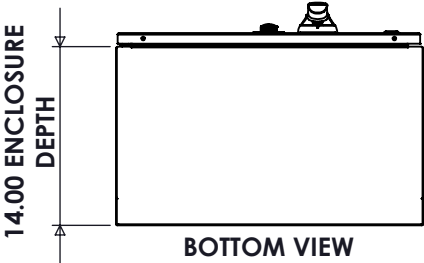

BOTTOM VIEW

CONNECTIONS

L1/L2/L3 - (2) #2-600MCM
T1/T2/T3 - (2) #2-600MCM
N - (2) #2-600MCM
G - (1) #6-350MCM

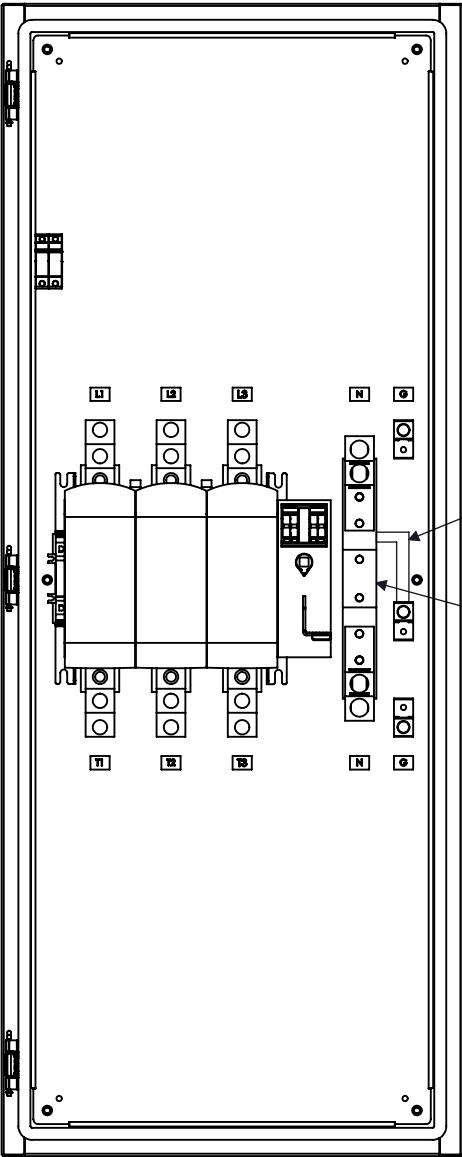

FRONT VIEW
DOOR REMOVED

BONDING
JUMPER

NEUTRAL
DISCONNECT

NOTES

- 1: NEUTRAL KIT ONLY PRESENT IF PURCHASED
2: PANEL IS RATED SUITABLE FOR USE AS SERVICE EQUIPMENT
WITH NEUTRAL KIT

PSI
Power & Controls
9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

800A ENCLOSED FUSIBLE DISCONNECT NEMA 4X					
REV	DESCRIPTION	DATE	DRAWN	C. JUNG	
0	ORIGINAL RELEASE	11/14/16	CHECKED		
1	LABELS ADDED	9/28/21	SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUL. NO		FD800LN4X
			GROUP NO		
			ORDER NO		