


**SPECIFICATIONS**

MAX VOLTAGE - 600VAC 3Φ  
 RATED CURRENT - 200A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4  
 REF. ES11NFD3  
 ENDURANCE - 8000 CYCLES  
 EST. SHIPPING WEIGHT - 100LBS

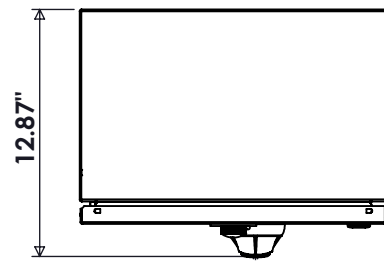


TOP VIEW

**CONNECTIONS**


L1/L2/L3 - #6-300MCM  
 T1/T2/T3 - #6-300MCM  
 N - #6-350MCM  
 G - #6-350MCM




SIDE VIEW

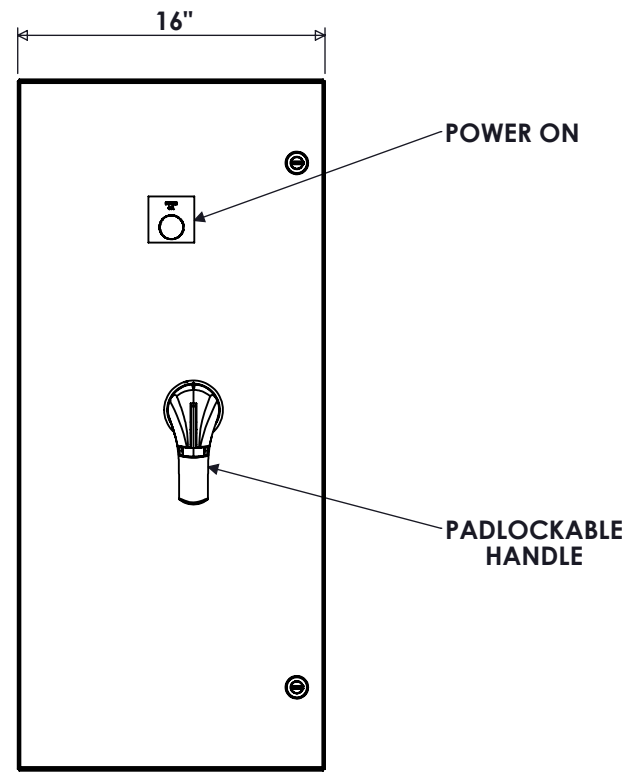


FRONT VIEW

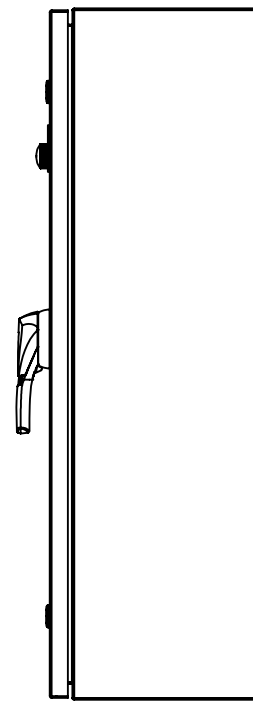

SIDE VIEW

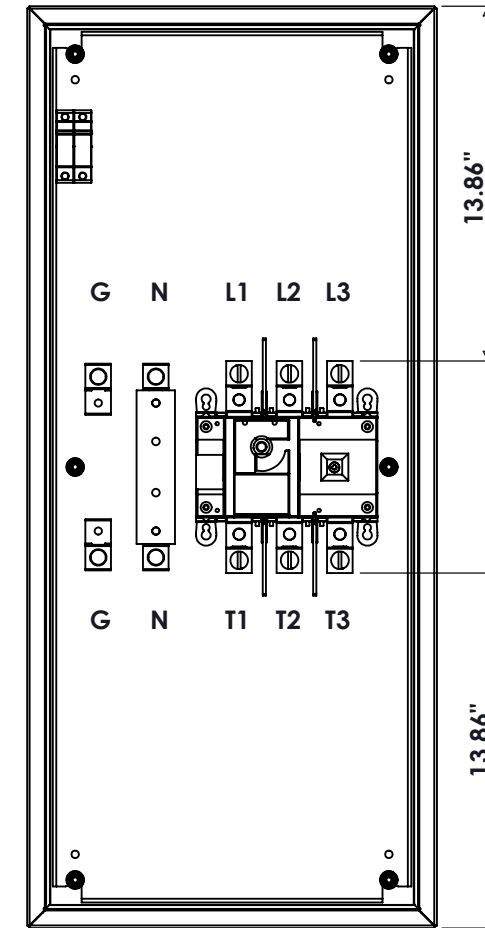

FRONT VIEW  
DOOR REMOVED

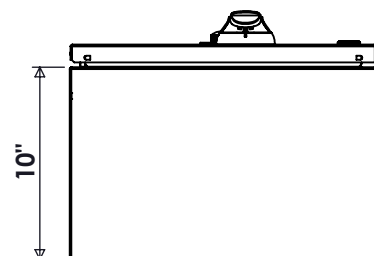

BOTTOM VIEW

**NOTES**

1: NEUTRAL KIT ONLY PRESENT IF PURCHASED



9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

200A ENCLOSED NON-FUSIBLE DISCONNECT NEMA 4			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	11/14/16	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	<b>DIMENSIONAL</b>
DRAWING NUMBER	<b>NFD200N4</b>