


SPECIFICATIONS

MAX VOLTAGE - 600VAC 3Φ
 RATED CURRENT - 200A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF. ES11NFD3
 ENDURANCE - 8000 CYCLES
 EST. SHIPPING WEIGHT - 100LBS

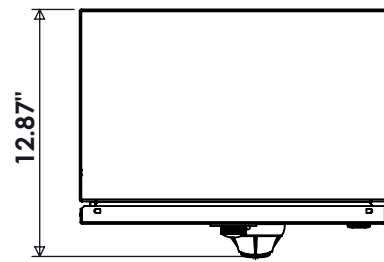


TOP VIEW

CONNECTIONS


L1/L2/L3 - #6-300MCM
 T1/T2/T3 - #6-300MCM
 N - #6-350MCM
 G - #6-350MCM




SIDE VIEW

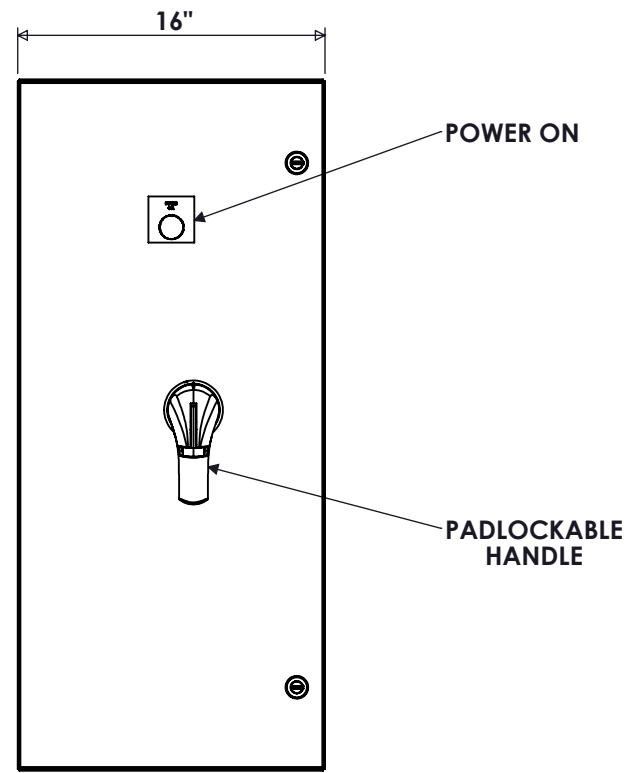


FRONT VIEW

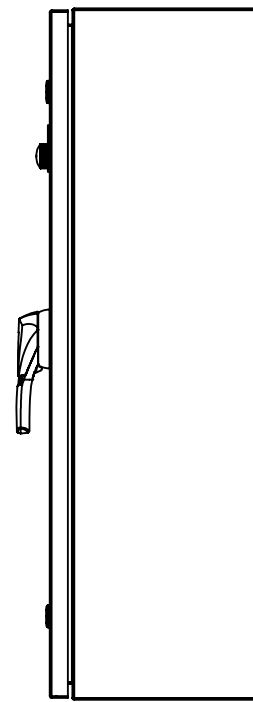

SIDE VIEW

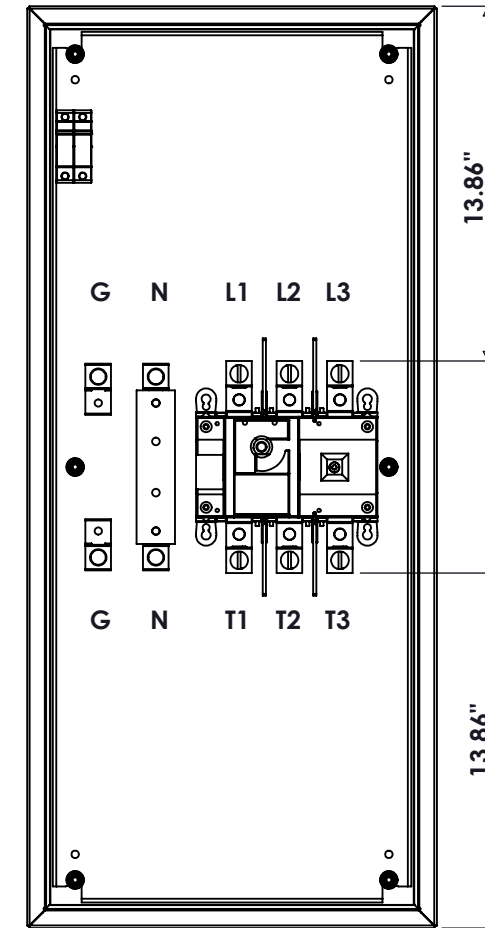

FRONT VIEW
DOOR REMOVED

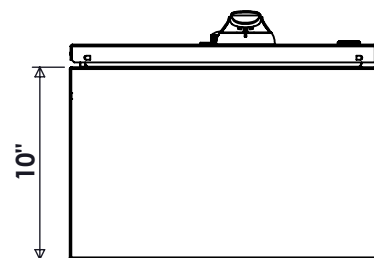

BOTTOM VIEW

NOTES

1: NEUTRAL KIT ONLY PRESENT IF PURCHASED



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

200A ENCLOSED NON-FUSIBLE DISCONNECT NEMA 4X

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED	
0	ORIGINAL RELEASE	11/14/16				
					SUP. NO	DRAWING TYPE
					SUP. BY NO	DIMENSIONAL
					PANEL NO	DRAWING NUMBER
					BUL. NO	NFD200N4X
					GROUP NO	
					ORDER NO	