



**SPECIFICATIONS**

MAX VOLTAGE - 600VAC 3 $\phi$   
 RATED CURRENT - 100 A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 1  
 REF. ES100145BF  
 DURABILITY - 6050 CYCLES  
 EST SHIPPING WEIGHT - 135LBS

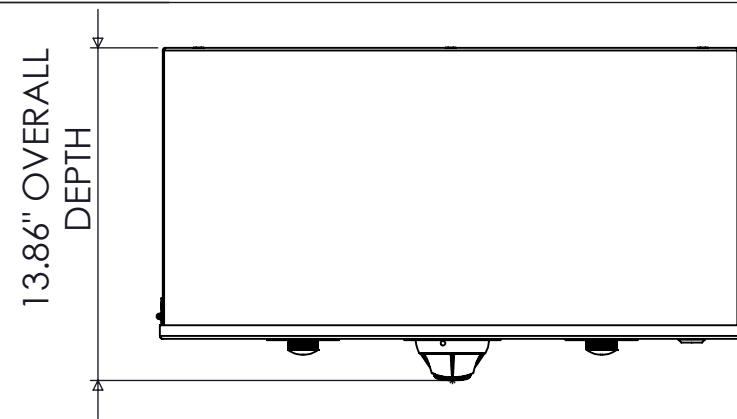

TOP VIEW

24" ENCLOSURE WIDTH

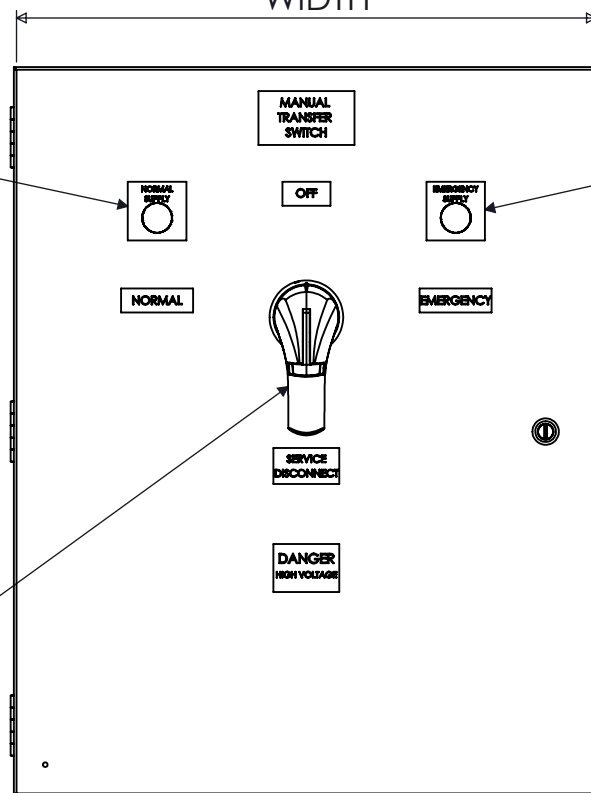


FRONT VIEW


"EMERGENCY SUPPLY" (RED)

"NORMAL SUPPLY" (GREEN)


PADLOCKABLE HANDLE I-O-II

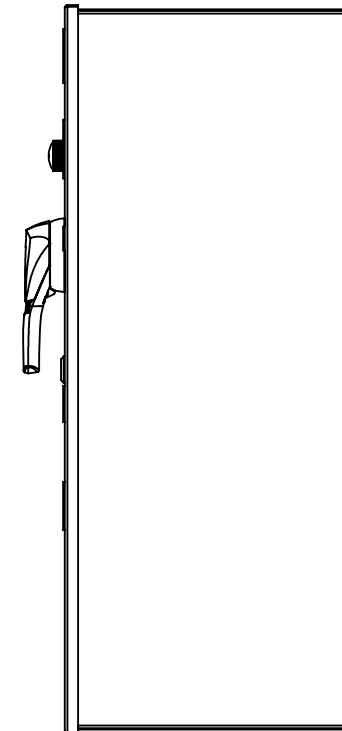

SIDE VIEW

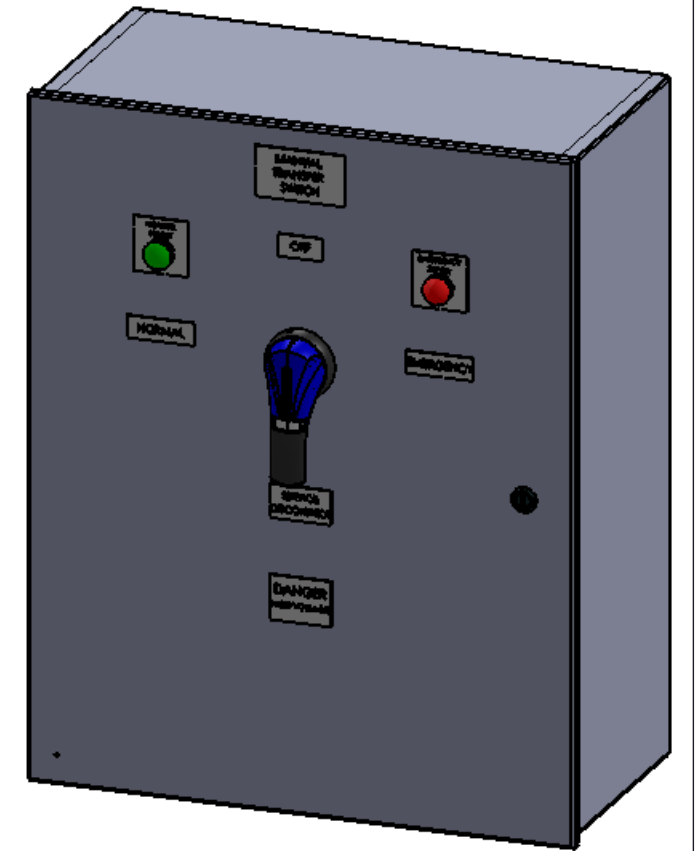


DIMETRIC VIEW

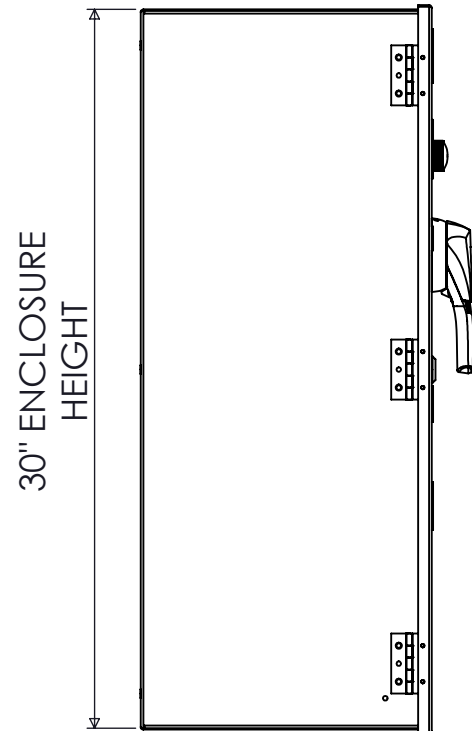

SIDE VIEW

30" ENCLOSURE HEIGHT

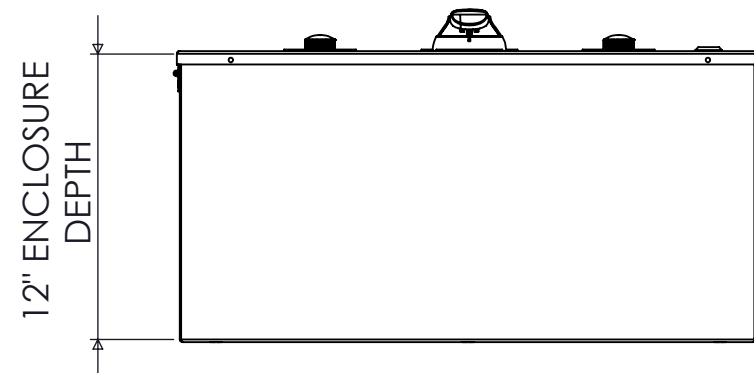

BOTTOM VIEW




12" ENCLOSURE DEPTH

100A FUSIBLE 3-POLE NEMA 1 MANUAL TRANSFER SWITCH			
REV	DESCRIPTION	DATE	DRAWN S.RICHARDSON
0	ORIGINAL RELEASE	12/7/13	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO


DRAWING TYPE  
**DIMENSIONAL**

DRAWING NUMBER  
**STS100N1BF3**

 9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

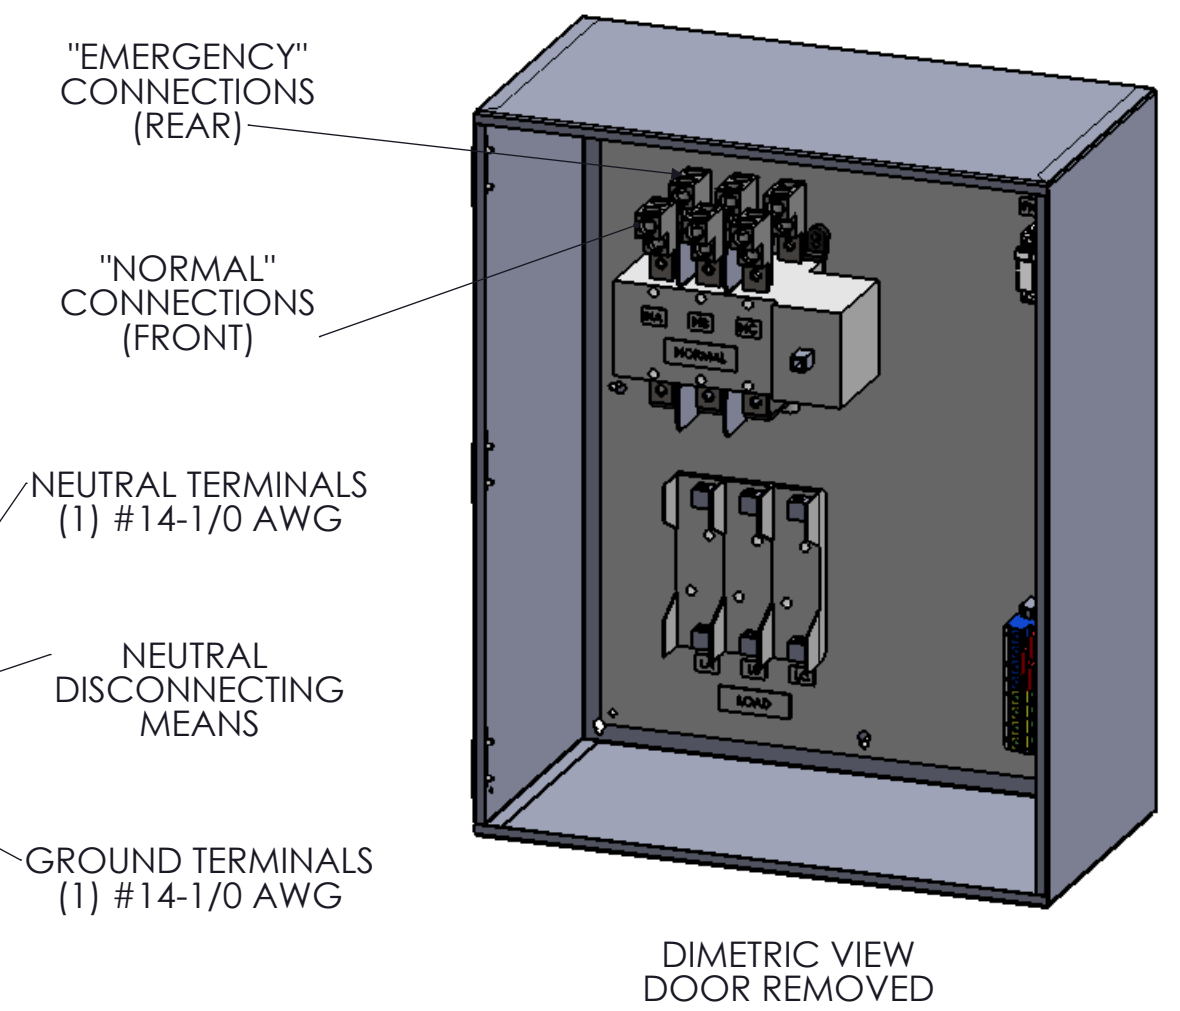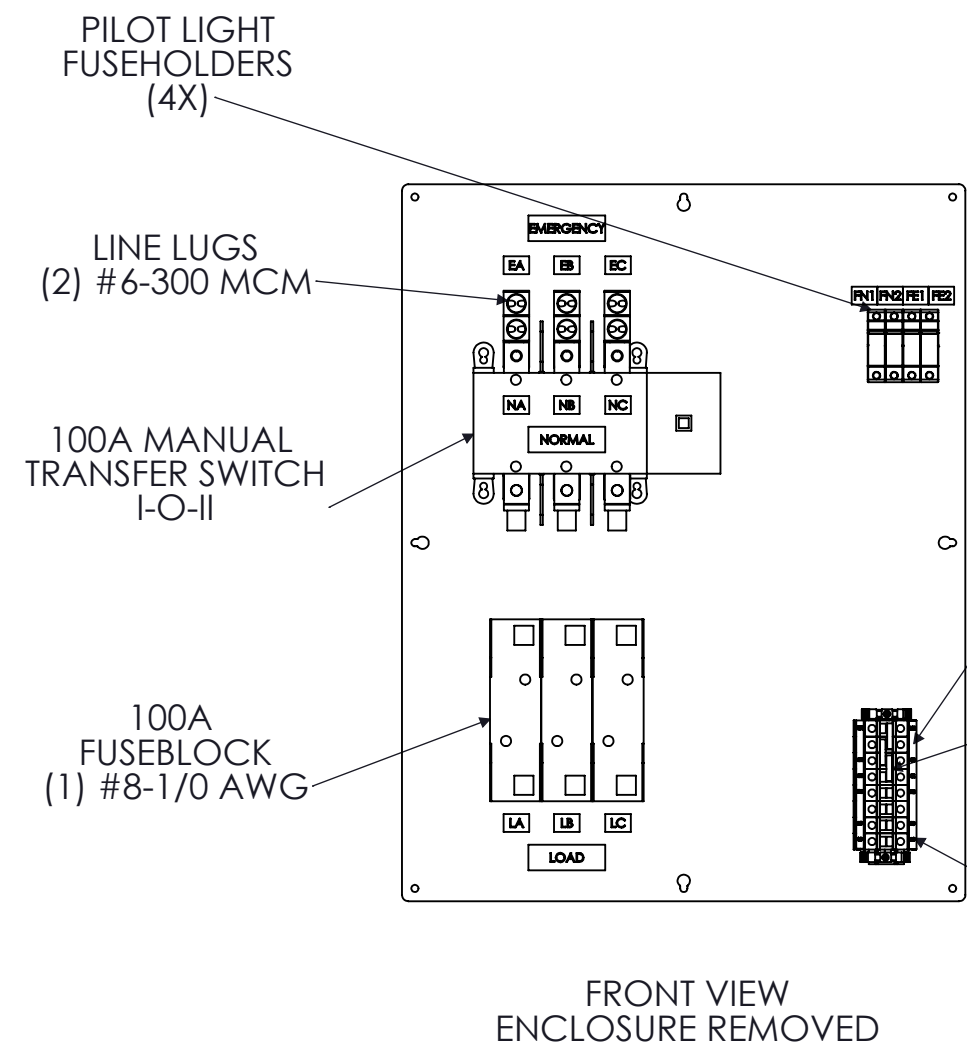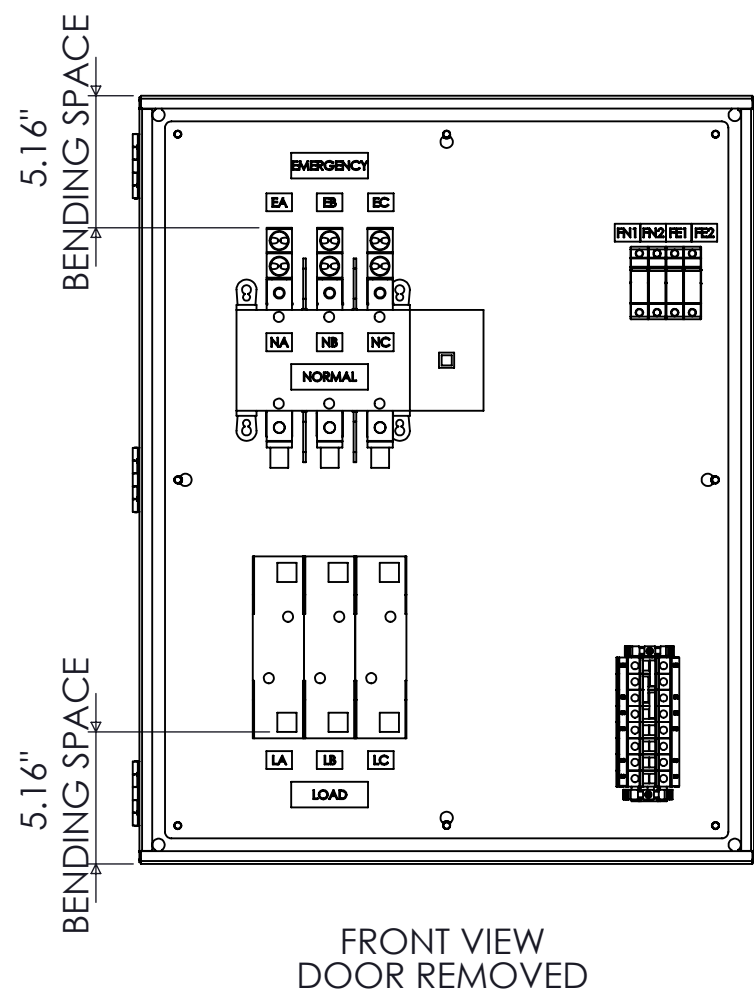

NOTE: FUSES PROVIDED IF PURCHASED  
 208-240VAC : FRN-R-100  
 480-600VAC : LPJ-100SP

 9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

100A FUSIBLE 3-POLE NEMA 1 MANUAL TRANSFER SWITCH				
REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	12/7/13	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	OUTLINE
			PANEL NO	DRAWING NUMBER
			BUL. NO	STS100N1BF3
			GROUP NO	
			ORDER NO	