


SPECIFICATIONS


MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 1200 A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF. ES100145NF
 DURABILITY - 3550 CYCLES
 EST SHIPPING WEIGHT - 750LBS

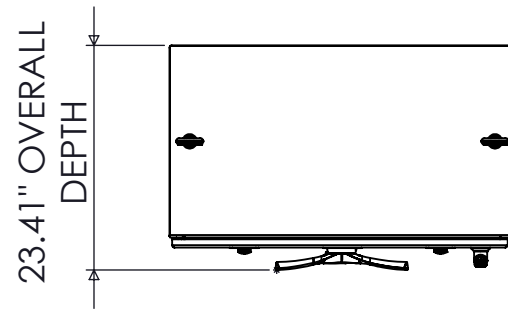


TOP VIEW

23.41" OVERALL DEPTH


36" ENCLOSURE WIDTH

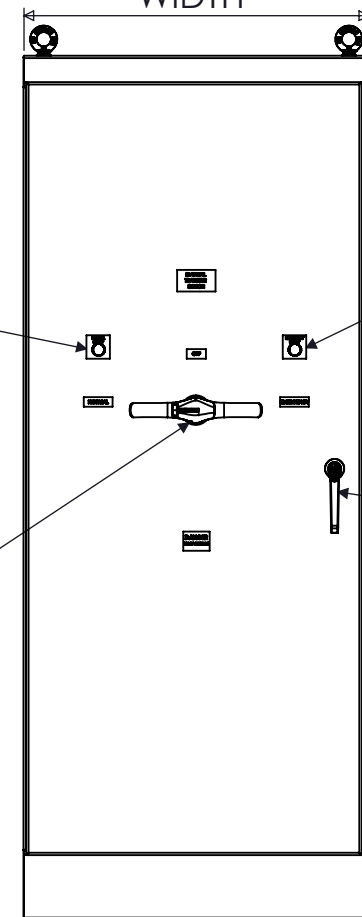

FRONT VIEW

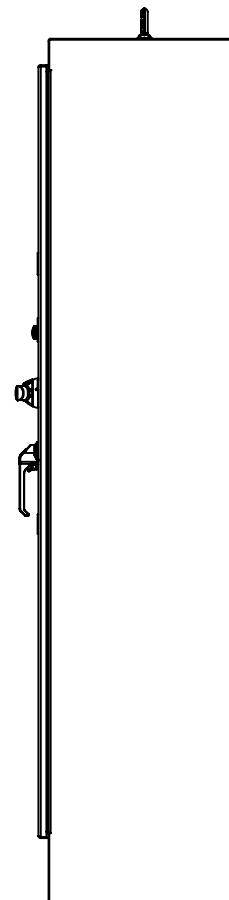

SIDE VIEW

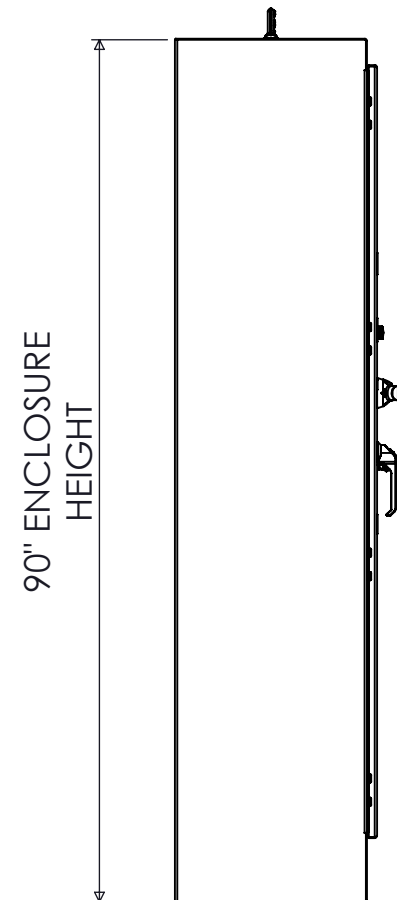

SIDE VIEW


90" ENCLOSURE HEIGHT

"NORMAL SUPPLY" (GREEN)


"EMERGENCY SUPPLY" (RED)

PADLOCKABLE HANDLE I-O-II

PADLOCKABLE DOOR HANDLE

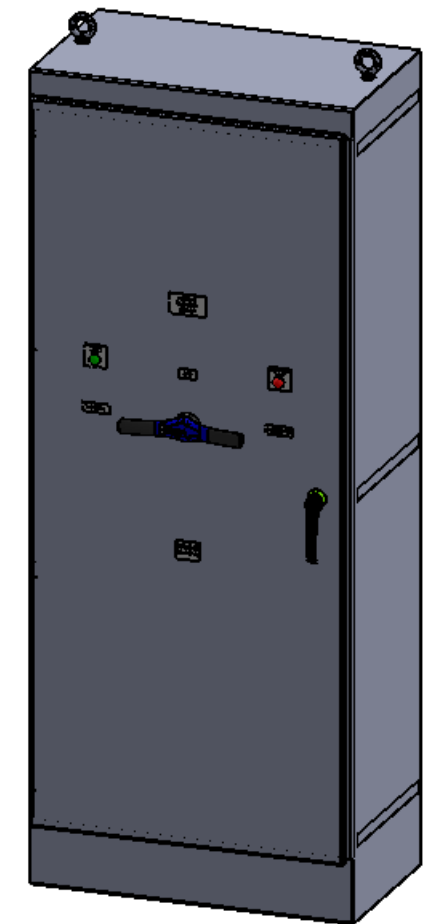

DIMETRIC VIEW

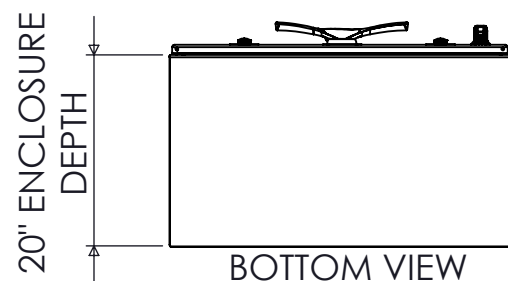

BOTTOM VIEW


20" ENCLOSURE DEPTH

1200A NON-FUSED 3-POLE NEMA 4X MANUAL TRANSFER SWITCH


REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	2/3/14	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	DIMENSIONAL
			PANEL NO	DRAWING NUMBER
			BUL. NO	STS1200N4XNF3
			GROUP NO	
			ORDER NO	




9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

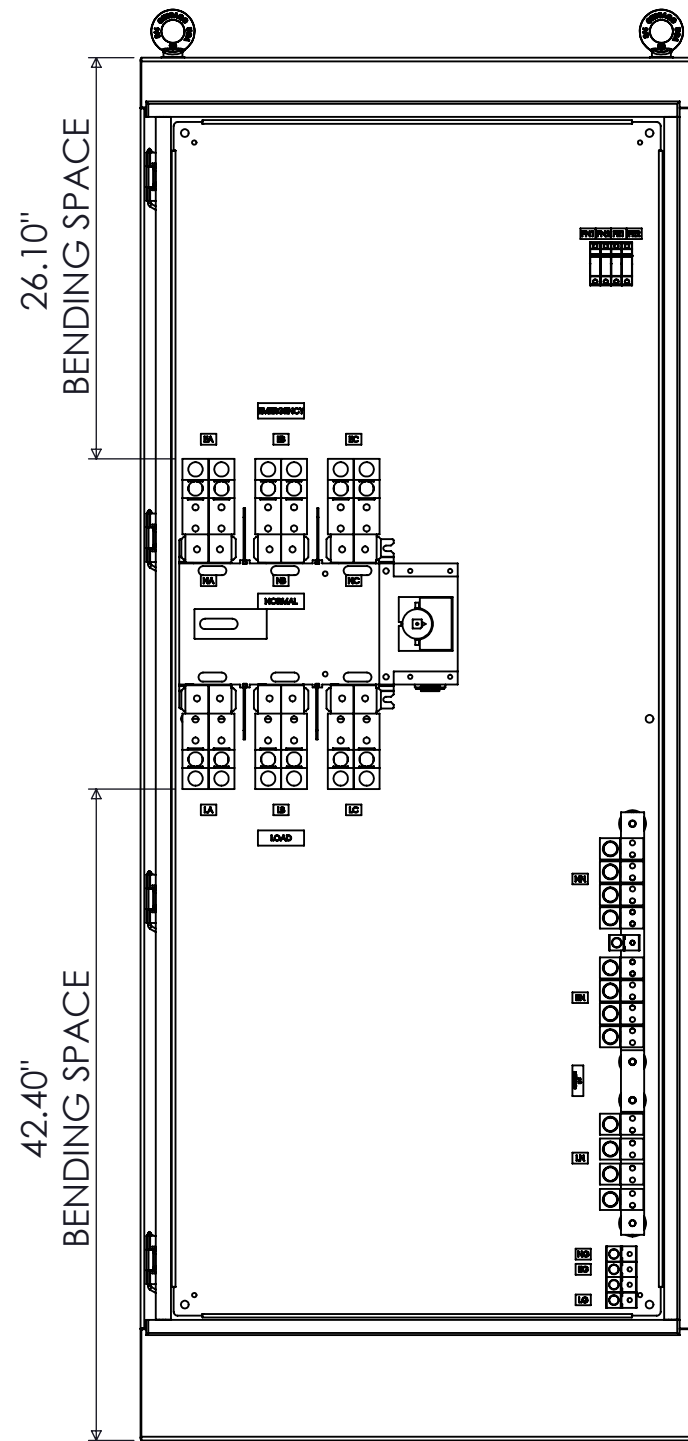

FRONT VIEW
DOOR REMOVED

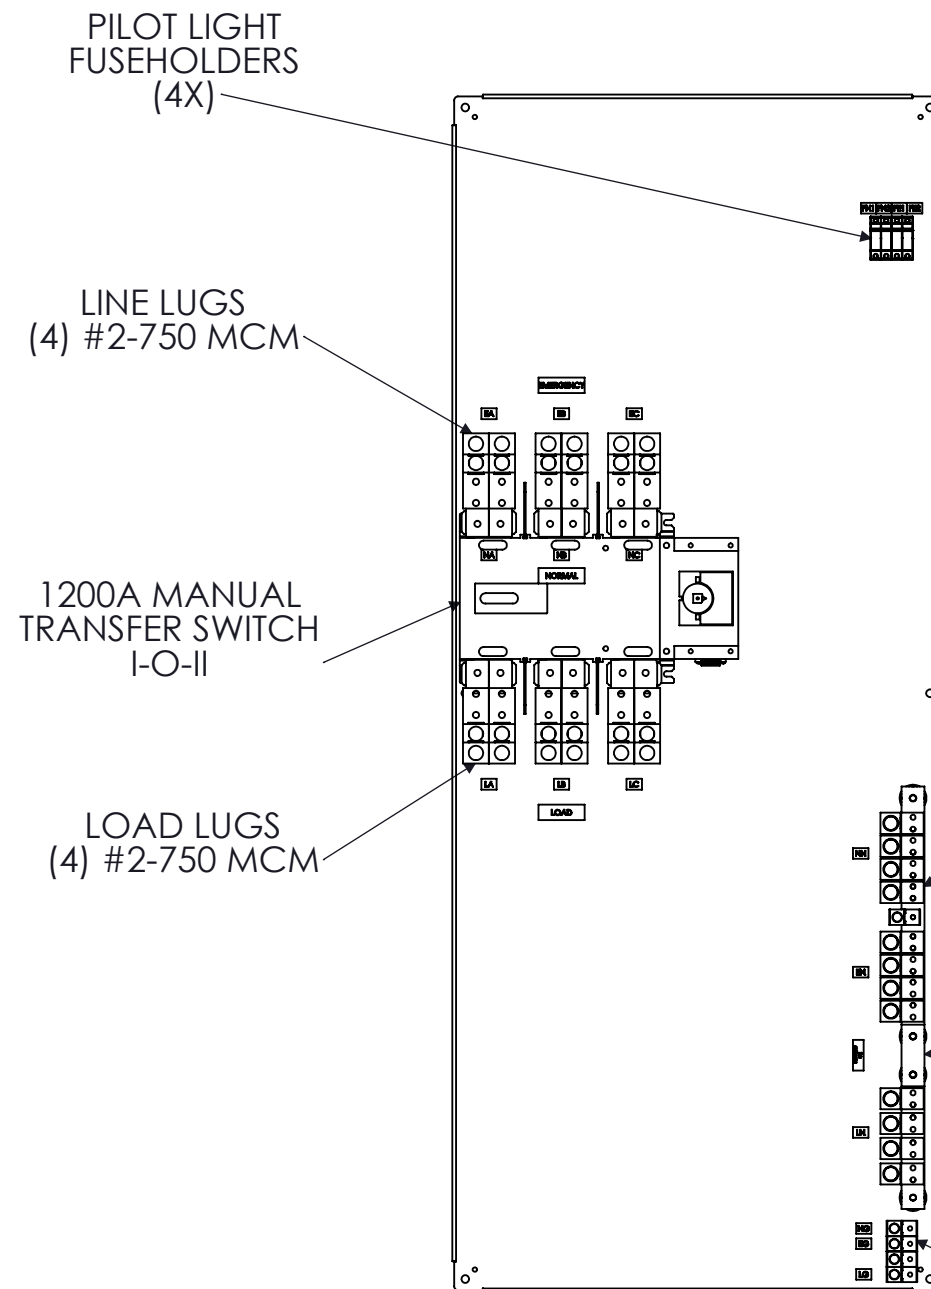

FRONT VIEW
ENCLOSURE REMOVED

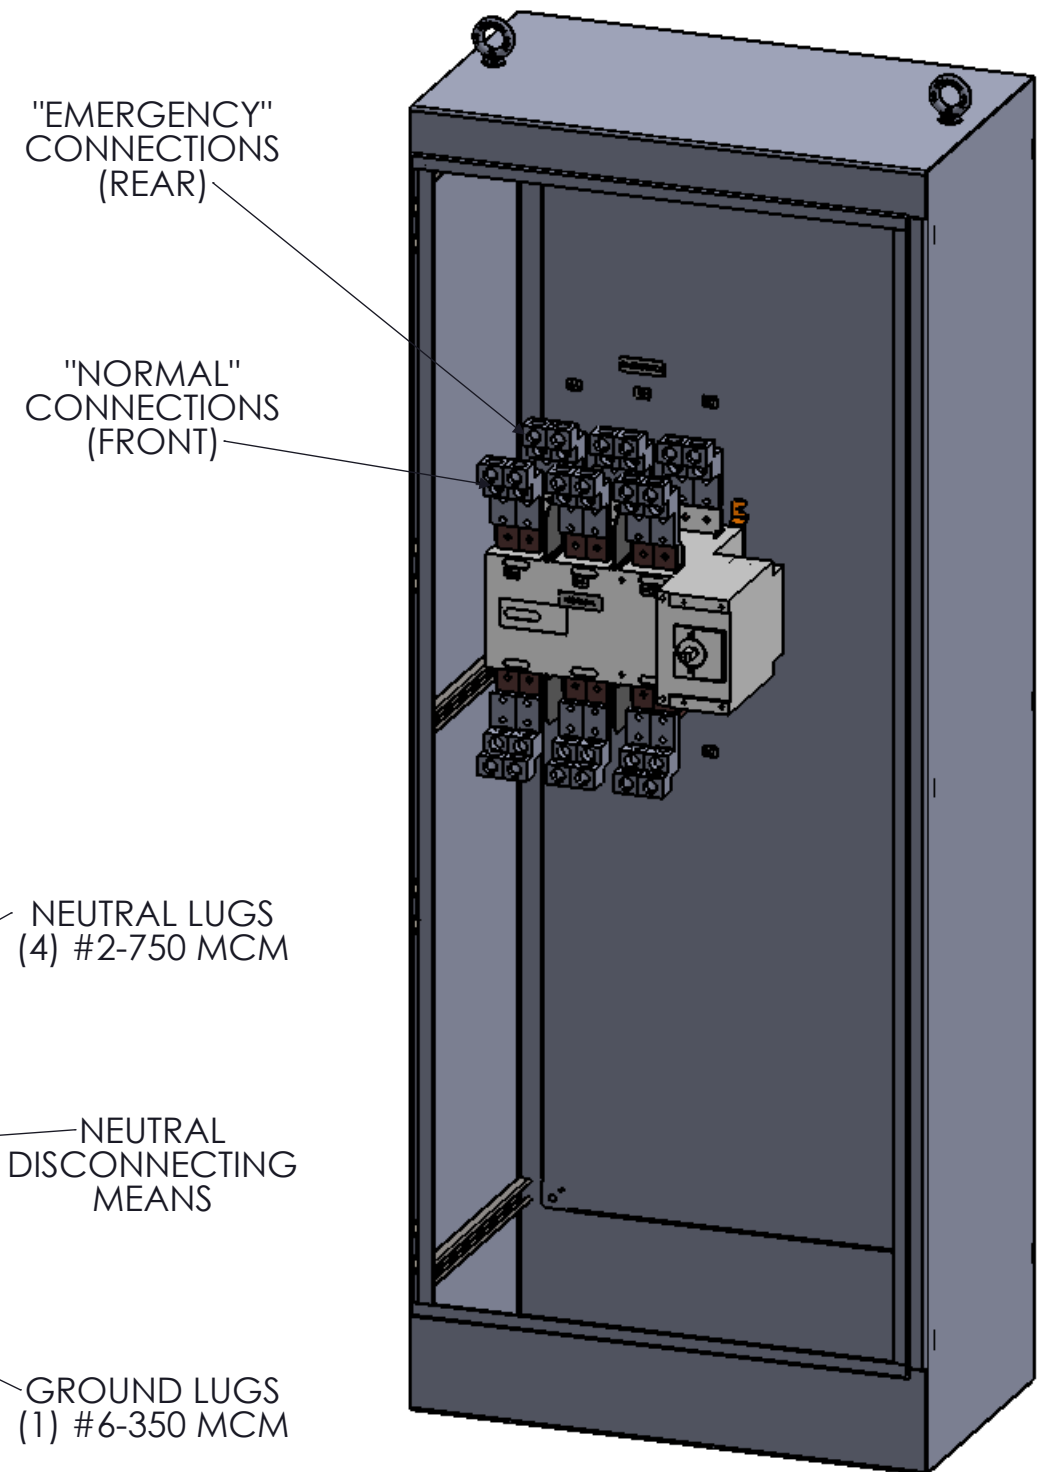

DIMETRIC VIEW
DOOR REMOVED

- PILOT LIGHT FUSEHOLDERS (4X)
- LINE LUGS (4) #2-750 MCM
- 1200A MANUAL TRANSFER SWITCH I-O-II
- LOAD LUGS (4) #2-750 MCM
- NEUTRAL LUGS (4) #2-750 MCM
- NEUTRAL DISCONNECTING MEANS
- GROUND LUGS (1) #6-350 MCM
- "EMERGENCY" CONNECTIONS (REAR)
- "NORMAL" CONNECTIONS (FRONT)

1200A NON-FUSED 3-POLE NEMA 4X MANUAL TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	
0	ORIGINAL RELEASE	2/3/14	CHECKED		
			SUP. NO		DRAWING TYPE
			SUP. BY NO		OUTLINE
			PANEL NO		DRAWING NUMBER
			BUL. NO		STS1200N4XNF3
			GROUP NO		
			ORDER NO		