


SPECIFICATIONS


MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 2500 A
 IEC RATED ONLY - NO UL LISTING
 ENCLOSURE RATING - NEMA 1
 REF. ES100145BF
 DURABILITY - 3000 CYCLES
 EST SHIPPING WEIGHT - 900LBS

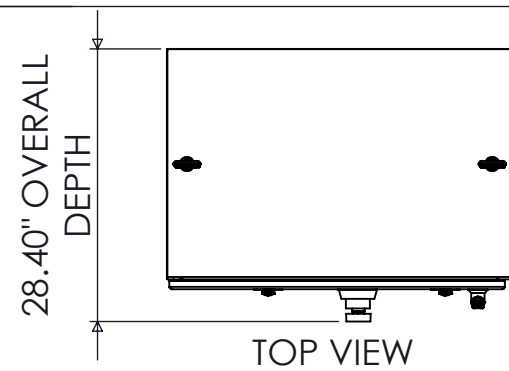

TOP VIEW


28.40" OVERALL DEPTH

36" ENCLOSURE WIDTH

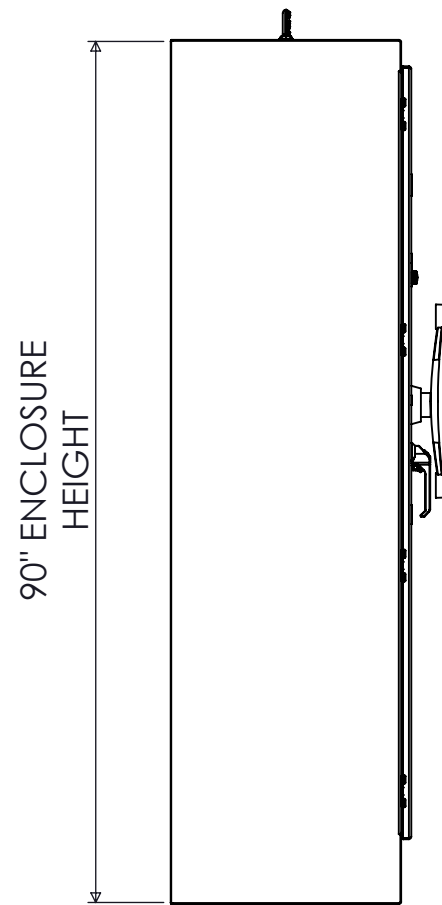


SIDE VIEW


90" ENCLOSURE HEIGHT

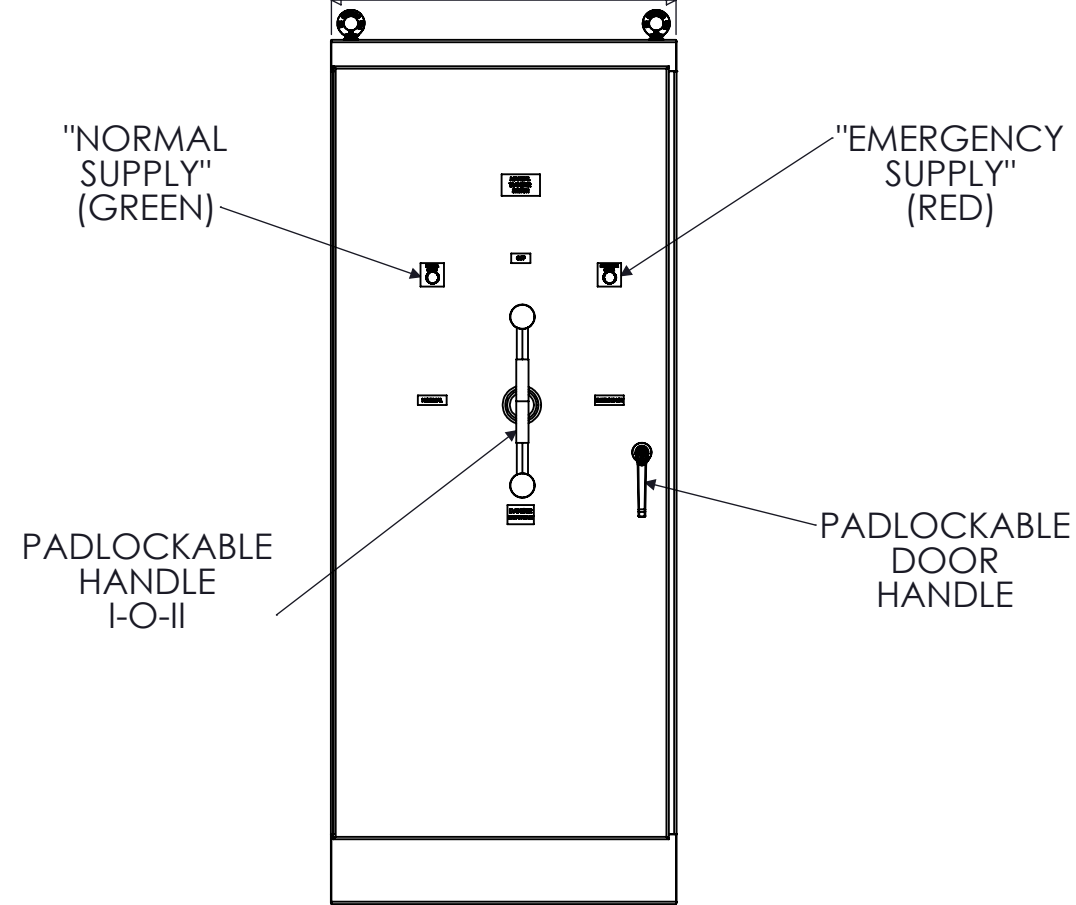


FRONT VIEW

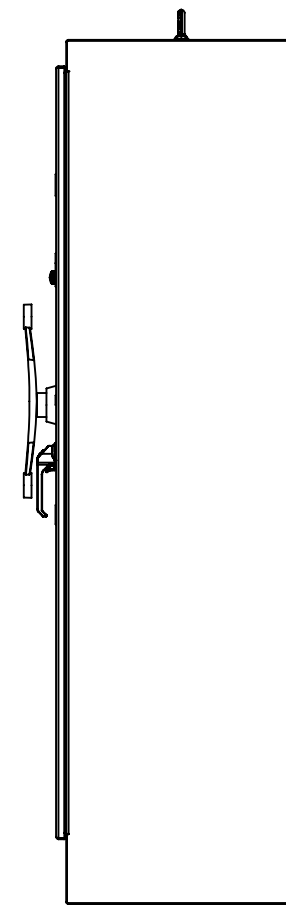

SIDE VIEW

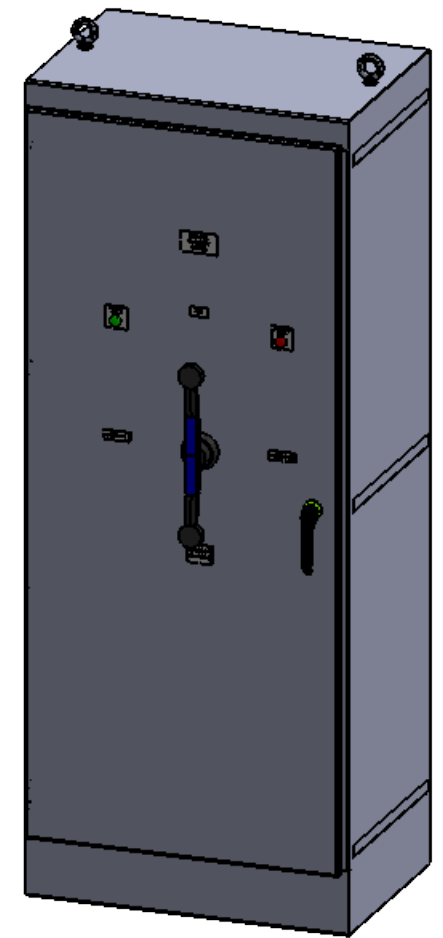

DIMETRIC VIEW

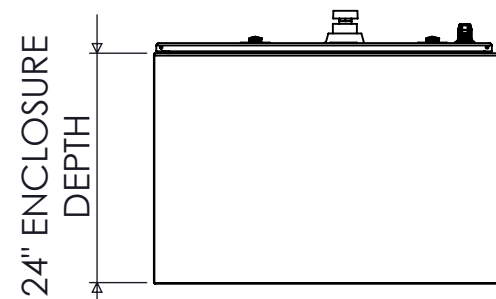

BOTTOM VIEW


24" ENCLOSURE DEPTH

2500A FUSIBLE 3-POLE NEMA 1 MANUAL TRANSFER SWITCH


REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED
0	ORIGINAL RELEASE	3/21/14			
			SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUL. NO		STS2500N1BF3
			GROUP NO		
			ORDER NO		



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

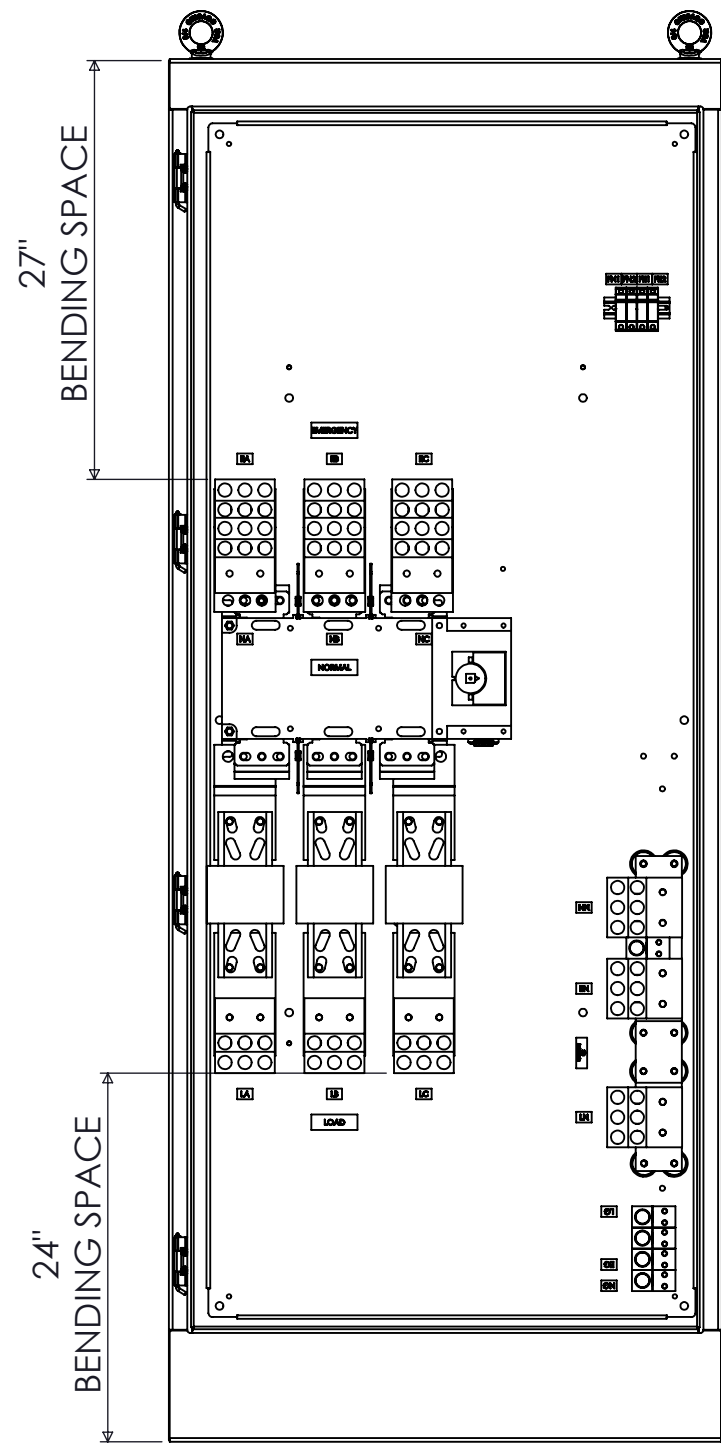

FRONT VIEW
DOOR REMOVED

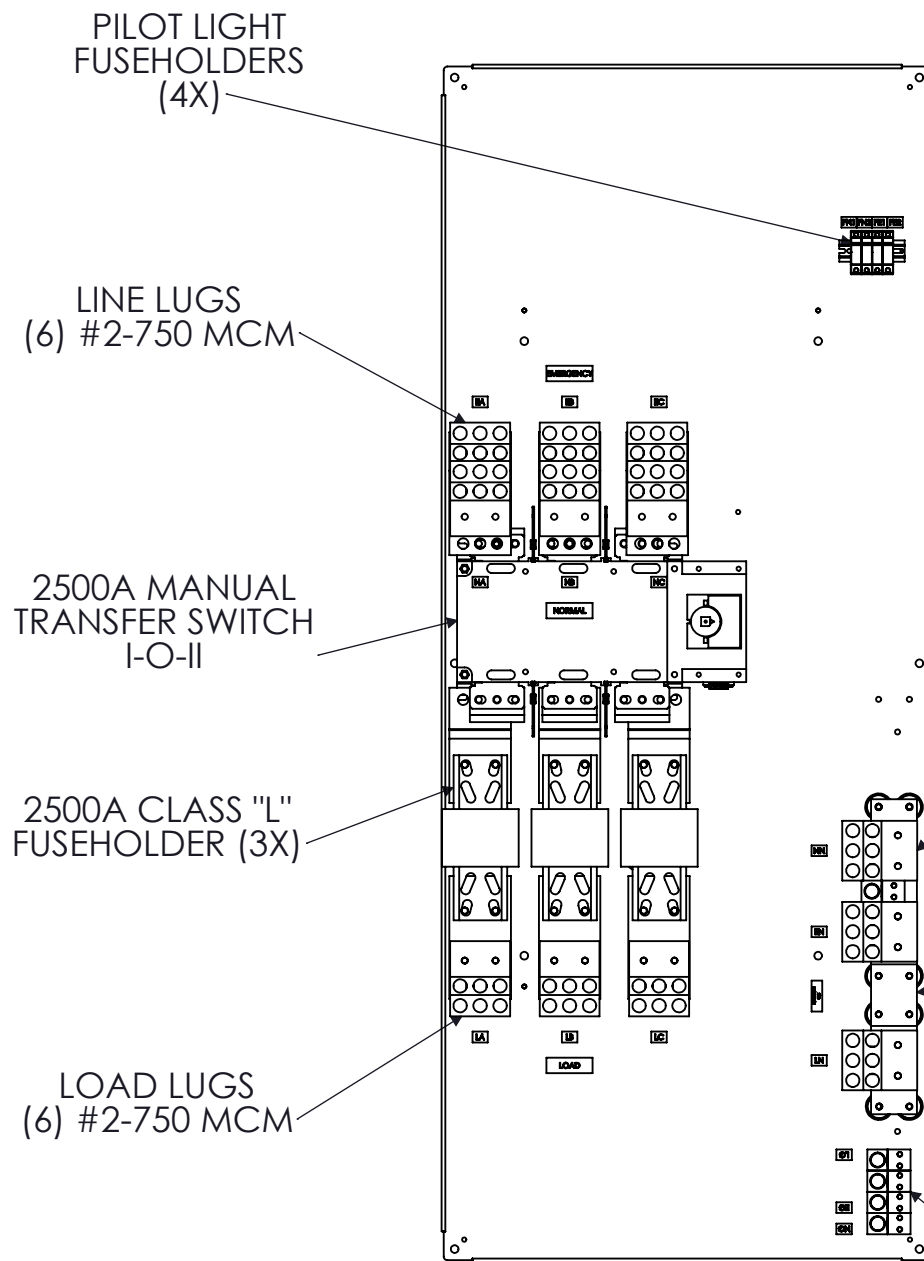

FRONT VIEW
ENCLOSURE REMOVED


"EMERGENCY"
CONNECTIONS
(REAR)

"NORMAL"
CONNECTIONS
(FRONT)

NEUTRAL LUGS
(6) #2-750 MCM

NEUTRAL
DISCONNECTING
MEANS

GROUND LUGS
(1) #2-750 MCM

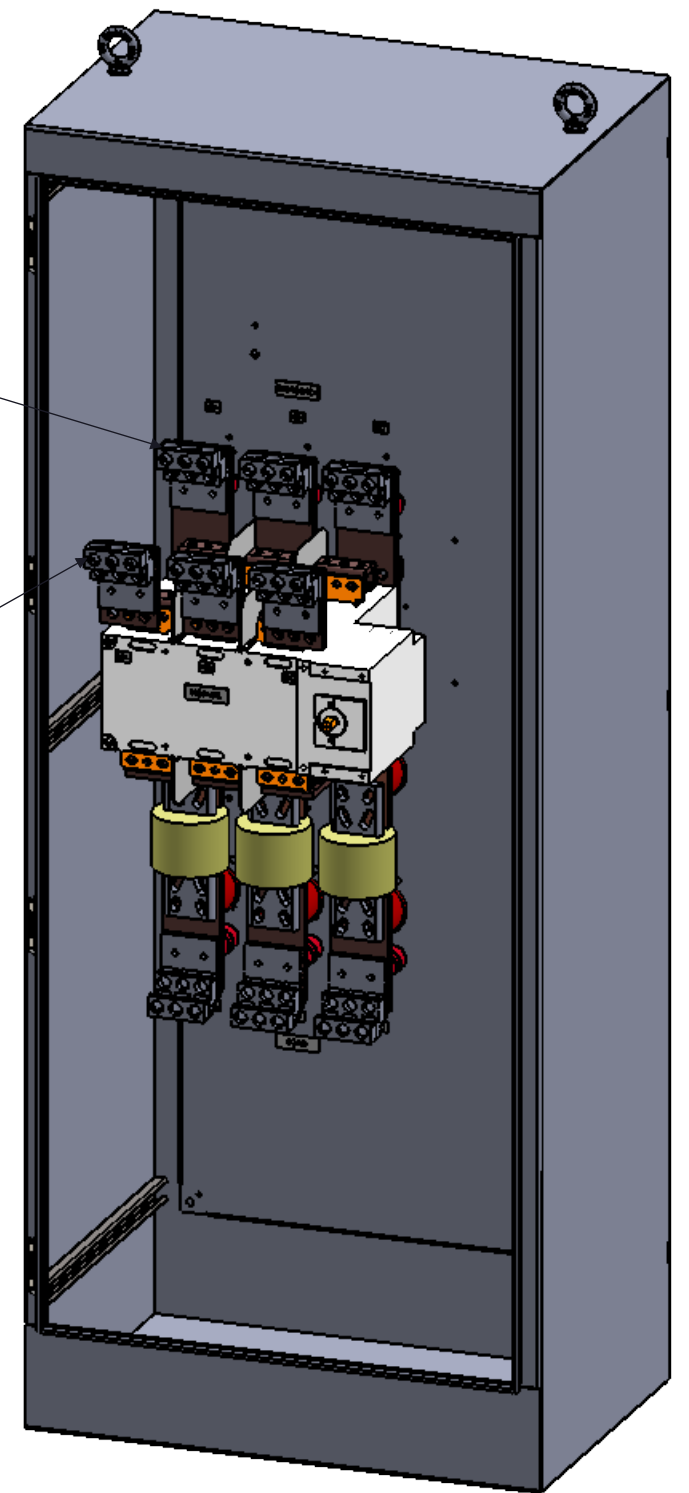

DIMETRIC VIEW
DOOR REMOVED

NOTE: FUSES PROVIDED IF PURCHASED
208-600VAC : KRP-C-2500SP

 9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

2500A FUSIBLE 3-POLE NEMA 1 MANUAL TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED
0	ORIGINAL RELEASE	3/21/14			
			SUP. NO		DRAWING TYPE
			SUP. BY NO		OUTLINE
			PANEL NO		DRAWING NUMBER
			BUL. NO		STS2500N1BF3
			GROUP NO		
			ORDER NO		