



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3 $\phi$   
 RATED CURRENT - 600 A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 3R  
 REF. ES100145SE  
 DURABILITY - 6050 CYCLES  
 EST SHIPPING WEIGHT - 450LBS  
 COLOR - RAL7035 LIGHT GREY

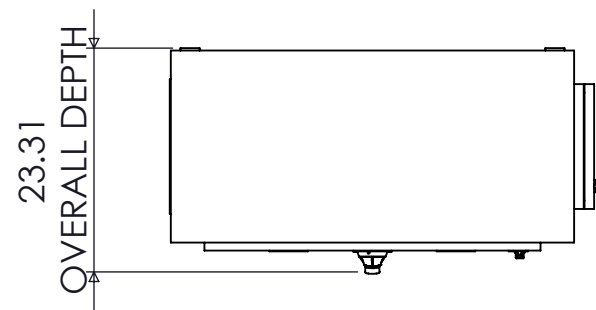


TOP VIEW

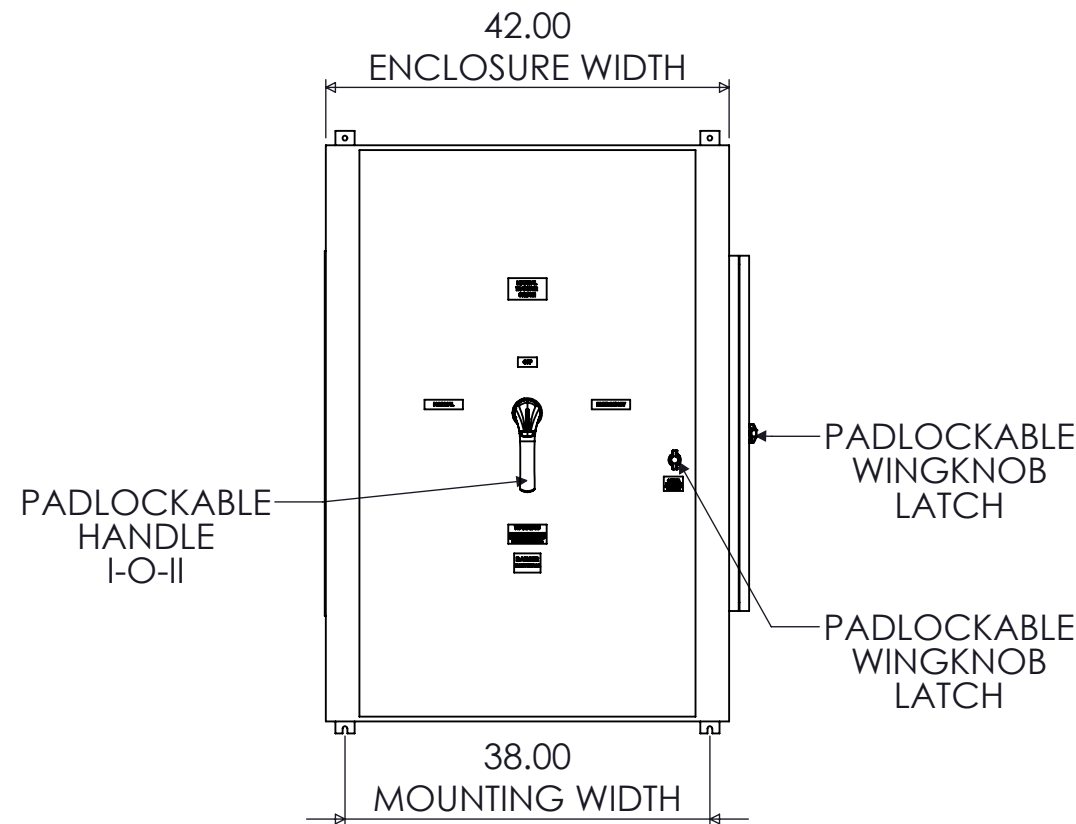


FRONT VIEW

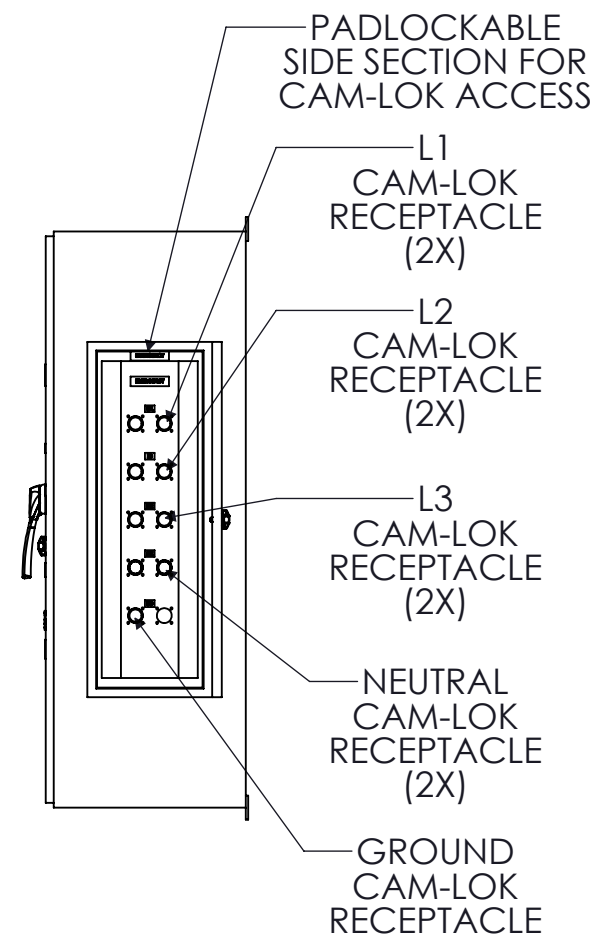


SIDE VIEW

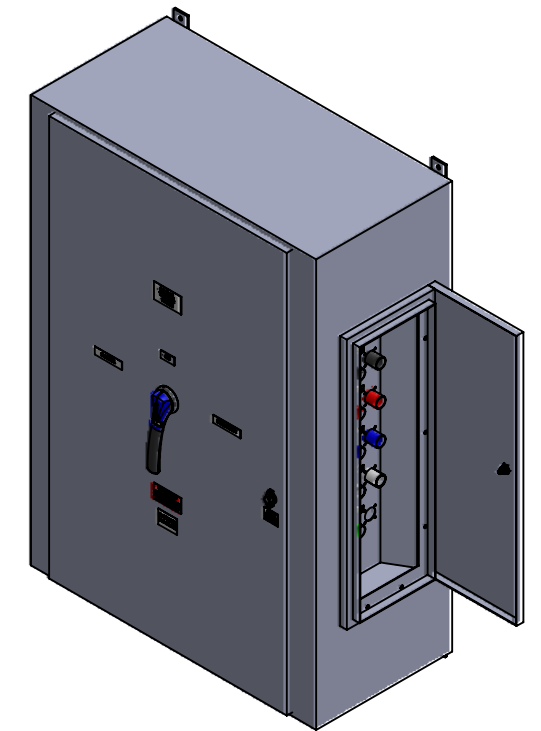

DIMETRIC VIEW

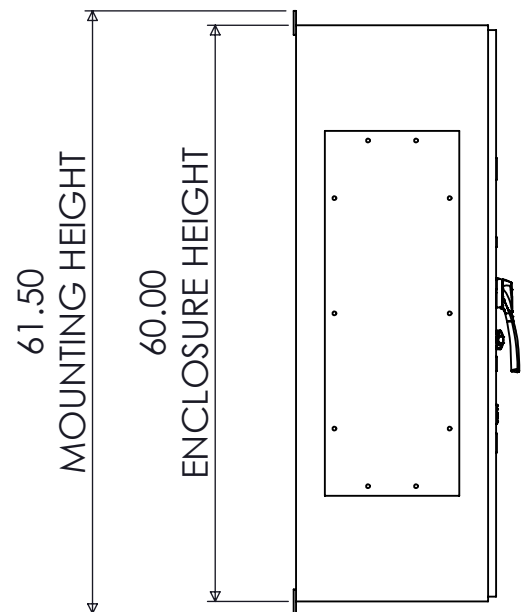

SIDE VIEW

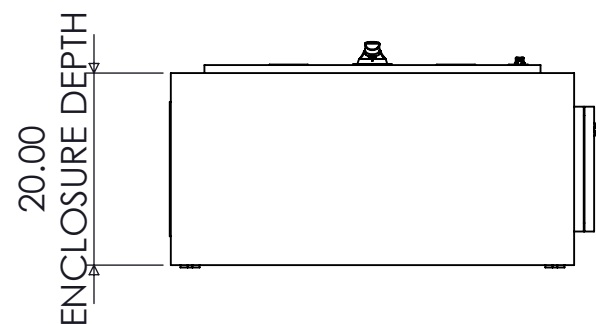

BOTTOM VIEW

**RECEPTACLE/COVER COLOR SCHEME**

	L1	L2	L3	N	GND
240VAC	BLK	RED	BLU	WHT	GRN
480VAC	BRN	ORG	YEL	WHT	GRN
600VAC	BLK	BLK	BLK	WHT	GRN

**600A SE-RATED 3-POLE NEMA 3R MANUAL TRANSFER SWITCH WITH CAM-LOKS (RIGHT)**


REV	DESCRIPTION	DATE	DRAWN	JG
0	ORIGINAL RELEASE	2/9/18	CHECKED	
			SUP. NO	
			SUP. BY NO	
			PANEL NO	
			BUIL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE  
**DIMENSIONAL**


DRAWING NUMBER  
**STS600N3RSE3CR**



9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

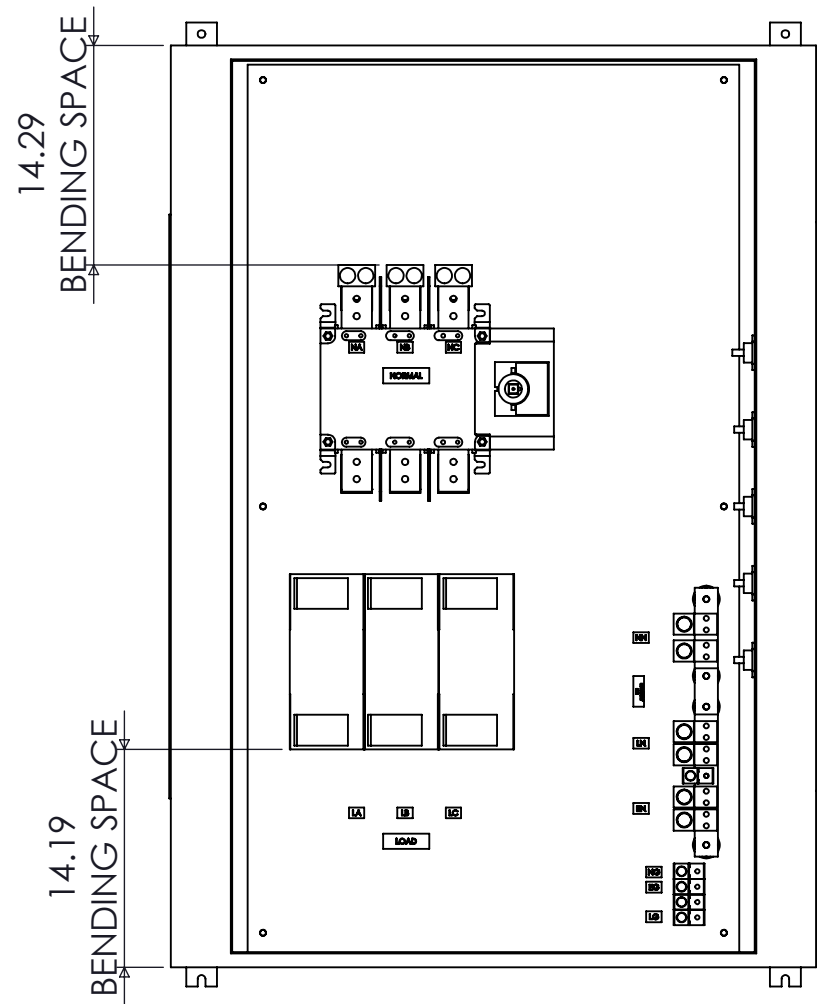

FRONT VIEW  
DOOR REMOVED

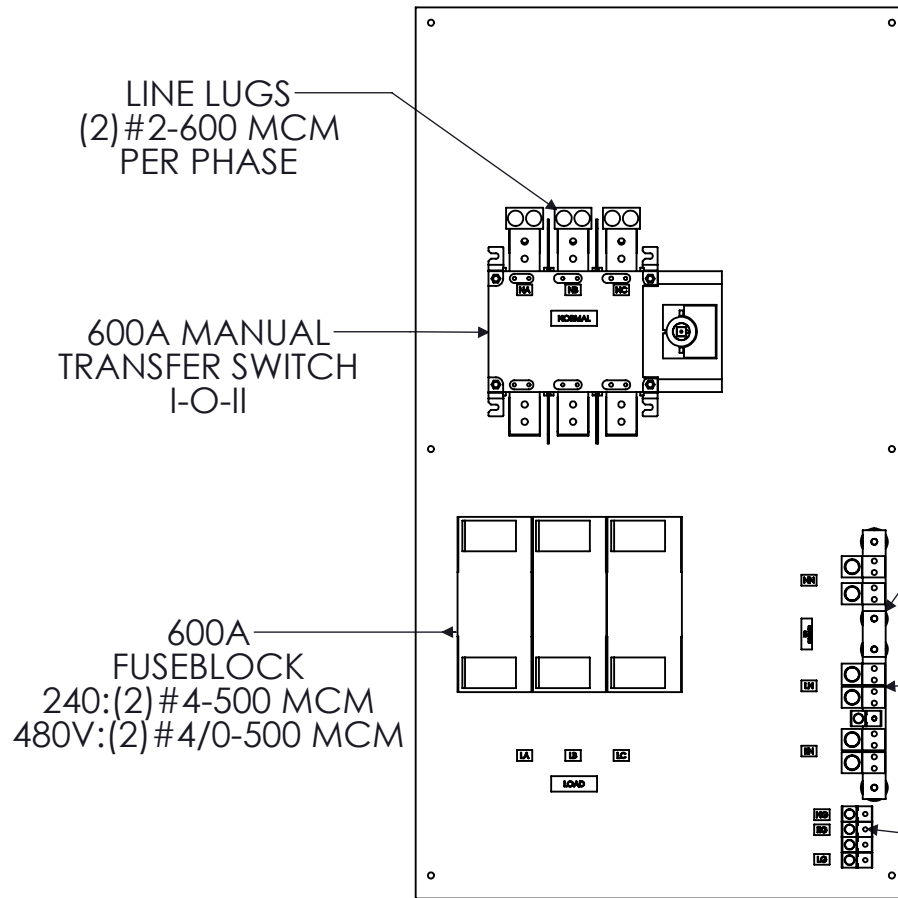

FRONT VIEW  
ENCLOSURE REMOVED


"EMERGENCY  
CONNECTION"  
(CAM-LOKS)

"NORMAL  
CONNECTION"  
(FRONT)

NEUTRAL  
DISCONNECTING  
MEANS


NEUTRAL LUGS  
(2) #2-750 MCM  
PER SOURCE

GROUND LUG  
(1) #6-350 MCM  
PER SOURCE

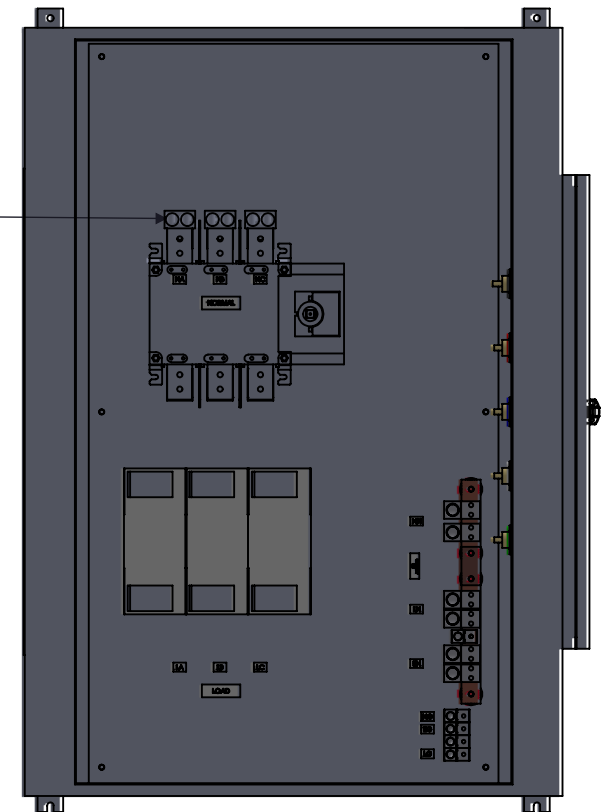

FRONT VIEW  
DOOR REMOVED

NOTE: FUSES PROVIDED IF PURCHASED  
208-240VAC : FRN-R-600  
480-600VAC : LPJ-600SP

 9900 TWIN LAKES PARKWAY  
CHARLOTTE, NC 28269  
704-596-5617  
PSICONTROLSOLUTIONS.COM

600A SE-RATED 3-POLE NEMA 3R MANUAL TRANSFER SWITCH WITH CAM-LOKS (RIGHT)			
REV	DESCRIPTION	DATE	DRAWN JG
0	ORIGINAL RELEASE	2/9/18	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	OUTLINE
DRAWING NUMBER	STS600N3RSE3CR