



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 800 A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 3R
 REF. ES100145SE4A
 DURABILITY - 3550 CYCLES
 EST SHIPPING WEIGHT - 650LBS
 COLOR - RAL7035 LIGHT GREY

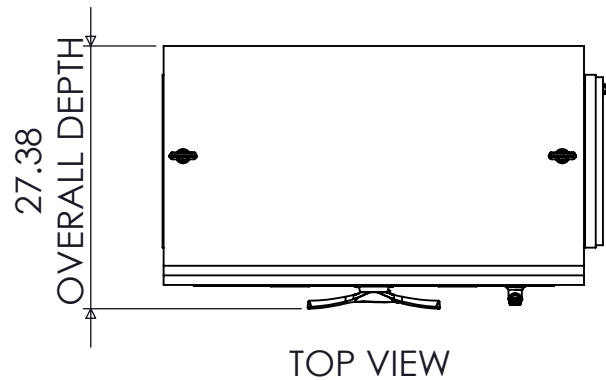

TOP VIEW

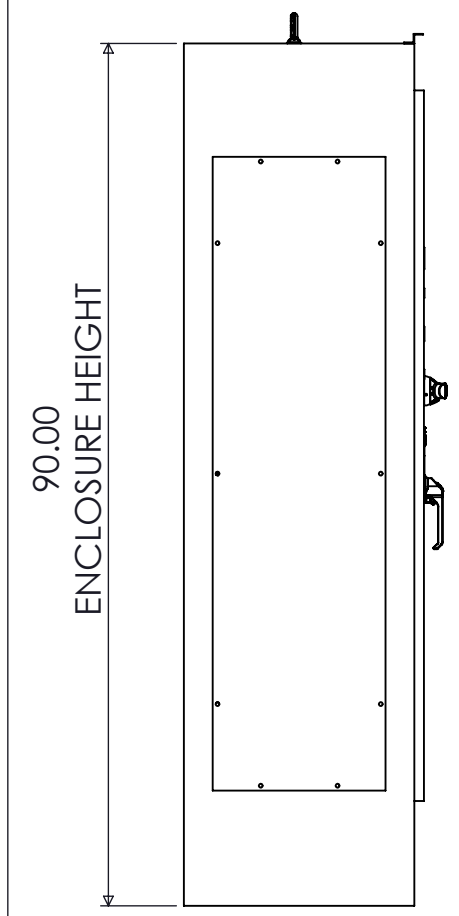

SIDE VIEW

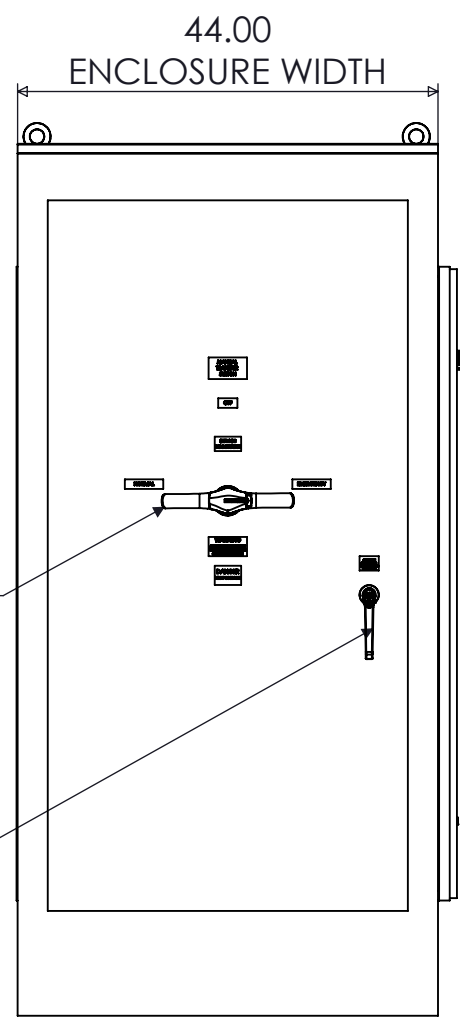

FRONT VIEW

PADLOCKABLE SWITCH HANDLE I-O-II

PADLOCKABLE DOOR HANDLE

PADLOCKABLE SIDE SECTION FOR CAM-LOK ACCESS


L1 CAM-LOK RECEPTACLES (2X)

L2 CAM-LOK RECEPTACLES (2X)


L3 CAM-LOK RECEPTACLES (2X)

NEUTRAL CAM-LOK RECEPTACLES (2X)


GROUND CAM-LOK RECEPTACLES

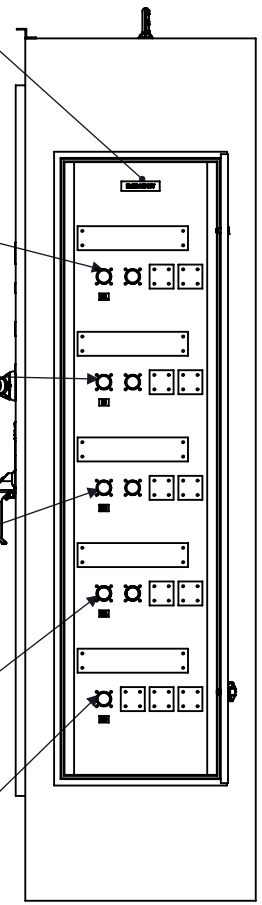

SIDE VIEW

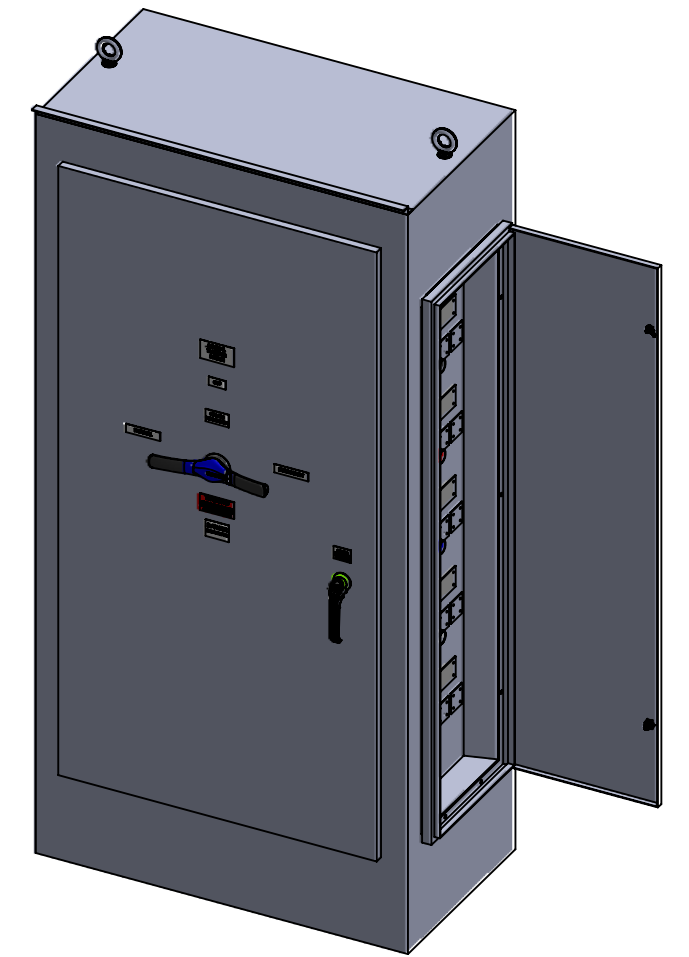


TRIMETRIC VIEW

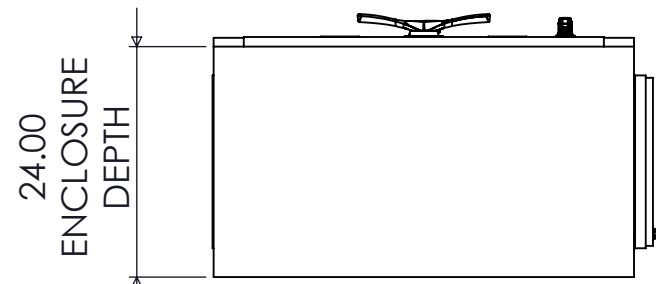

BOTTOM VIEW


RECEPTACLE/COVER COLOR SCHEME

	L1	L2	L3	N	GND
240VAC	BLK	RED	BLU	WHT	GRN
480VAC	BRN	ORG	YEL	WHT	GRN
600VAC	BLK	BLK	BLK	WHT	GRN



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

800A SE-RATED 4-POLE NEMA 3R MANUAL TRANSFER SWITCH WITH CAM-LOKS (RIGHT)					
REV	DESCRIPTION	DATE	DRAWN	J.GONZALEZ	
0	ORIGINAL RELEASE	1/17/17	CHECKED		
			SUP. NO	DRAWING TYPE	
			SUP. BY NO	DIMENSIONAL	
			PANEL NO	DRAWING NUMBER	
			BUIL. NO	STS800N3RSE4CR	
			GROUP NO		
			ORDER NO		

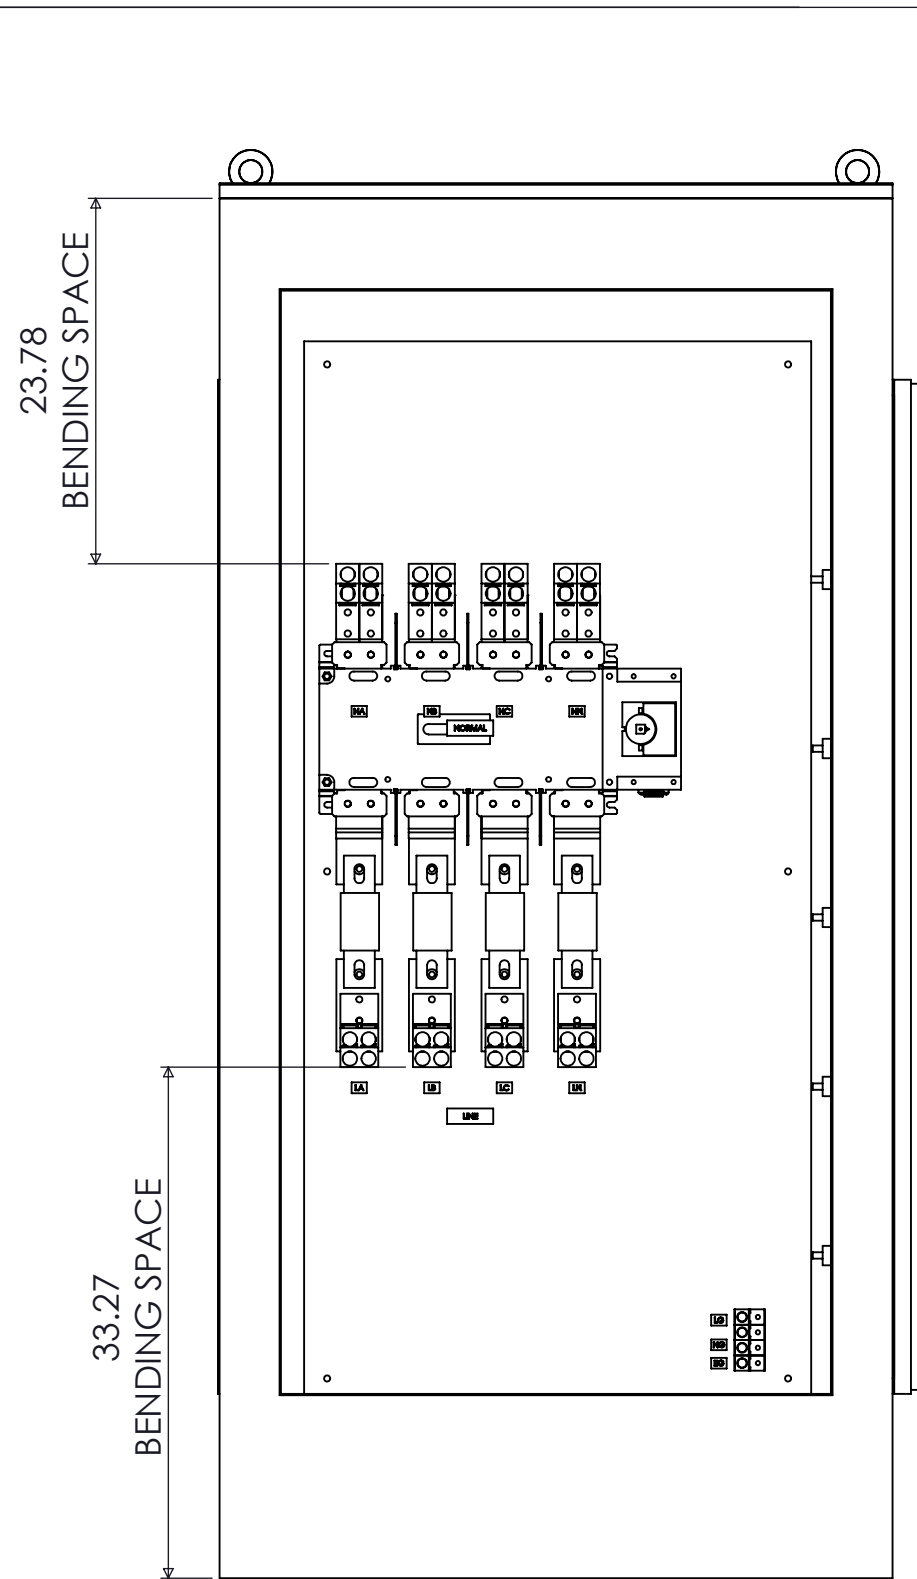


FRONT VIEW
DOOR REMOVED

LINE LUGS
(4) #2-600 MCM
PER PHASE

CLASS "L"
FUSEHOLDER

LOAD LUGS
(4) #2-600 MCM
PER PHASE

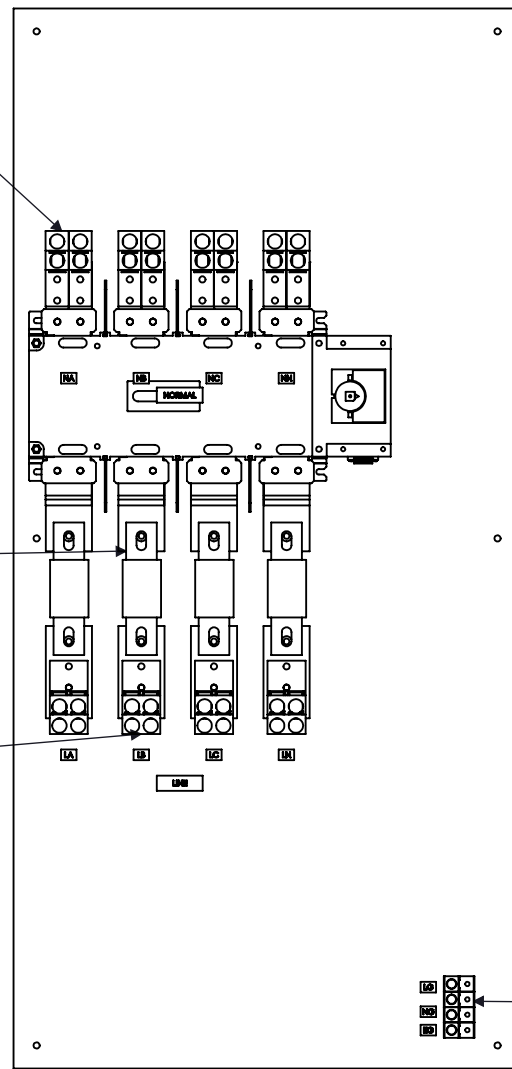


FRONT VIEW
ENCLOSURE REMOVED

GROUND LUGS
(1) #6-350 MCM
PER SOURCE


"EMERGENCY"
CONNECTIONS
(CAM-LOKS)

"NORMAL"
CONNECTIONS
(FRONT)

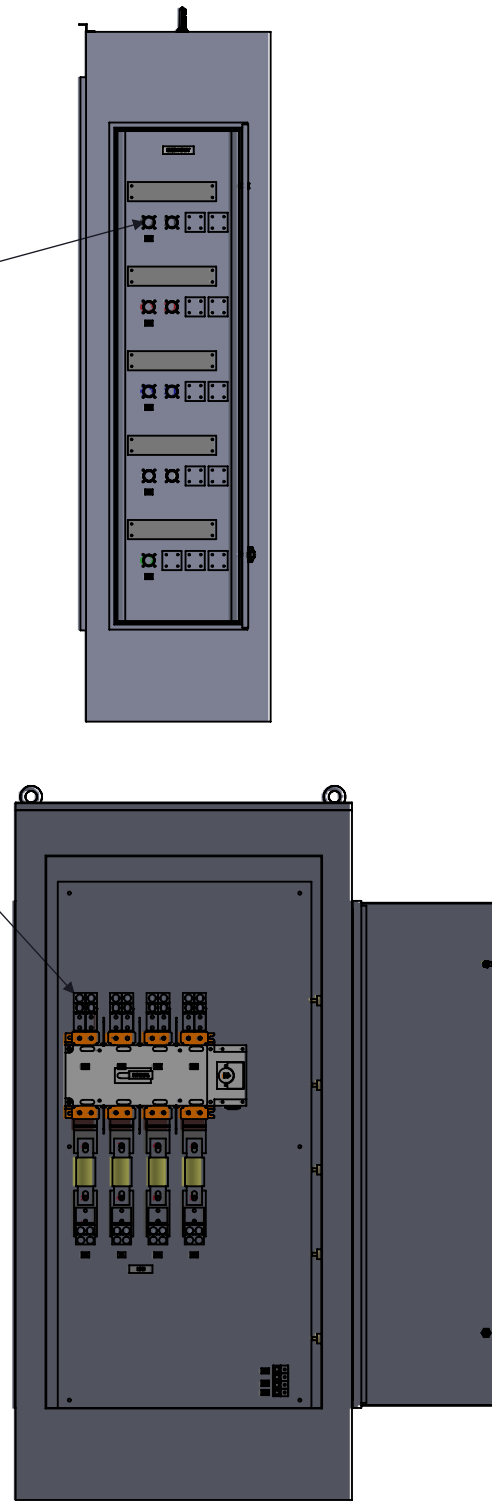

FRONT VIEW
DOOR REMOVED

NOTE: FUSES PROVIDED IF PURCHASED
208-600VAC : KRP-C-800SP



9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

800A SE-RATED 4-POLE NEMA 3R MANUAL TRANSFER SWITCH WITH CAM-LOKS (RIGHT)			
REV	DESCRIPTION	DATE	DRAWN J.GONZALEZ
0	ORIGINAL RELEASE	1/17/17	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO
			DRAWING TYPE
			OUTLINE
			DRAWING NUMBER
			STS800N3RSE4CR