



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ  
RATED CURRENT - 1600A  
STANDARDS - UL508A  
ENCLOSURE RATING - NEMA 4X  
TYPE 316 STAINLESS STEEL  
EST. SHIPPING WEIGHT - 700LBS



TOP VIEW

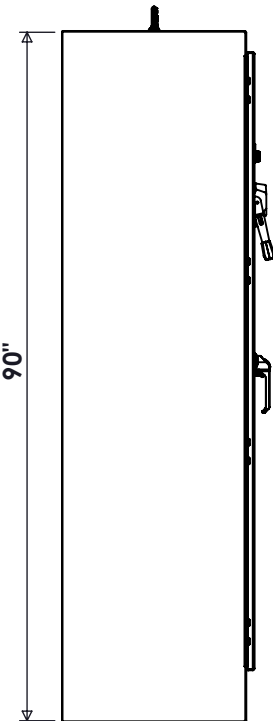

SIDE VIEW

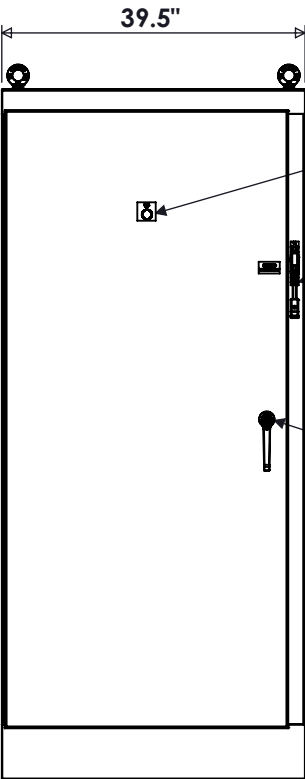


FRONT VIEW


POWER ON

FLANGE DISCONNECT  
HANDLE

PADLOCKABLE  
DOOR HANDLE

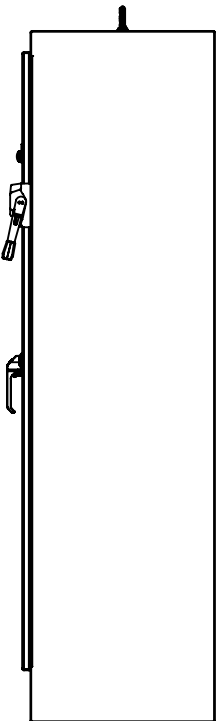


SIDE VIEW

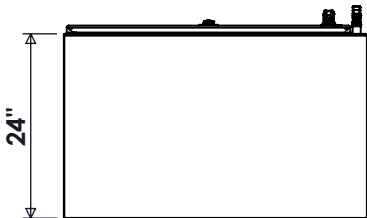

BOTTOM VIEW

CONNECTIONS

L1,L2,L3 - (4) 500-1000MCM  
T1,T2,T3 - (4) 500-1000MCM  
N - (4) #2-750MCM  
G - (2) #2-750MCM

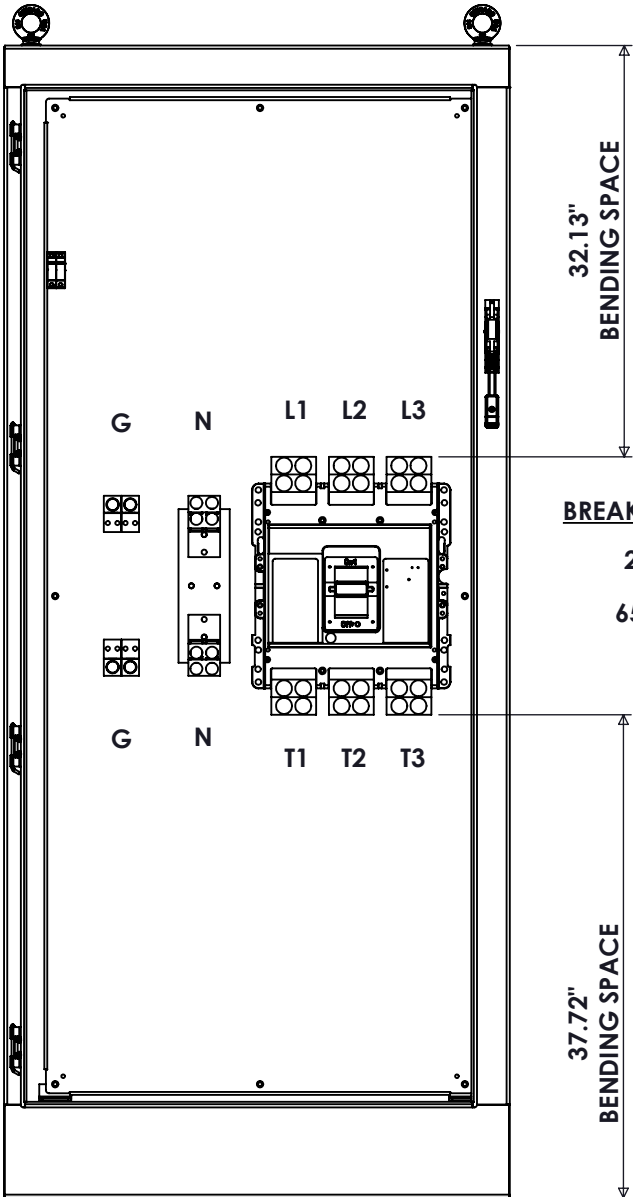

BREAKER INFORMATION

2000A FRAME  
1600A TRIP  
65kAIC @ 480V

FRONT VIEW  
DOOR REMOVED

| 1600A, 3-POLE ENCLOSED BREAKER NEMA 4X |                  |         |            |              |                |
|----------------------------------------|------------------|---------|------------|--------------|----------------|
| REV                                    | DESCRIPTION      | DATE    | DRAWN      | S.RICHARDSON |                |
| 0                                      | ORIGINAL RELEASE | 6/28/17 | CHECKED    | J.RAY        |                |
|                                        |                  |         | SUP. NO    |              | DRAWING TYPE   |
|                                        |                  |         | SUP. BY NO |              | DIMENSIONAL    |
|                                        |                  |         | PANEL NO   |              | DRAWING NUMBER |
|                                        |                  |         | BUL. NO    |              | ECB1600N4XNSE3 |
|                                        |                  |         | GROUP NO   |              |                |
|                                        |                  |         | ORDER NO   |              |                |



9900 TWIN LAKES PARKWAY  
CHARLOTTE, NC 28269  
704-596-5617  
PSICONTROLSOLUTIONS.COM