



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
 RATED CURRENT - 200A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 EST. SHIPPING WEIGHT - 100LBS

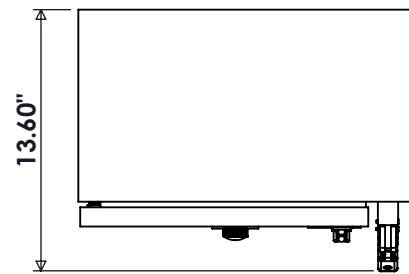


TOP VIEW

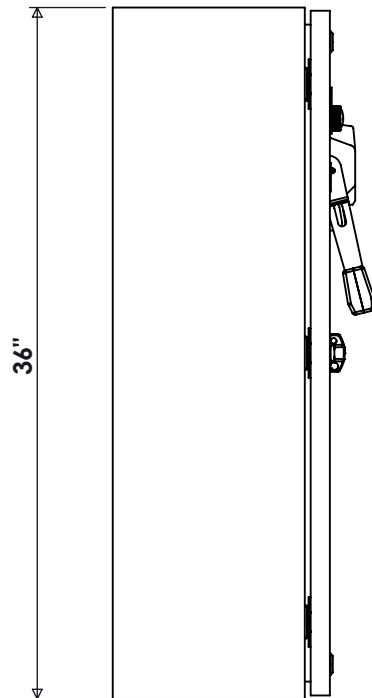


SIDE VIEW

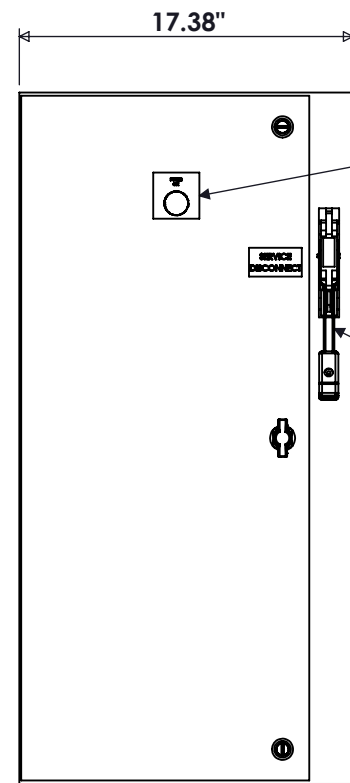

FRONT VIEW

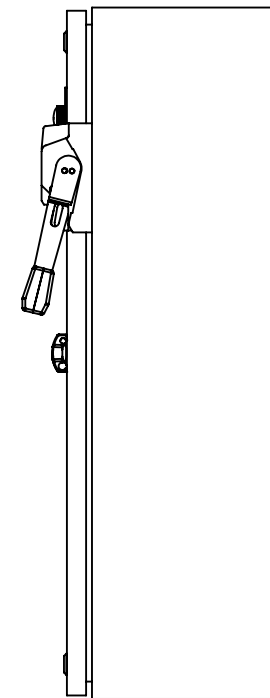


SIDE VIEW

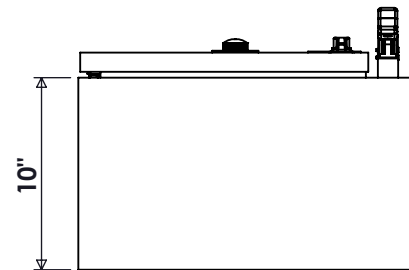

BOTTOM VIEW


CONNECTIONS

L1,L2,L3 - #4-350MCM
 T1,T2,T3 - #4-350MCM
 N - #6-350MCM
 G - #6-350MCM

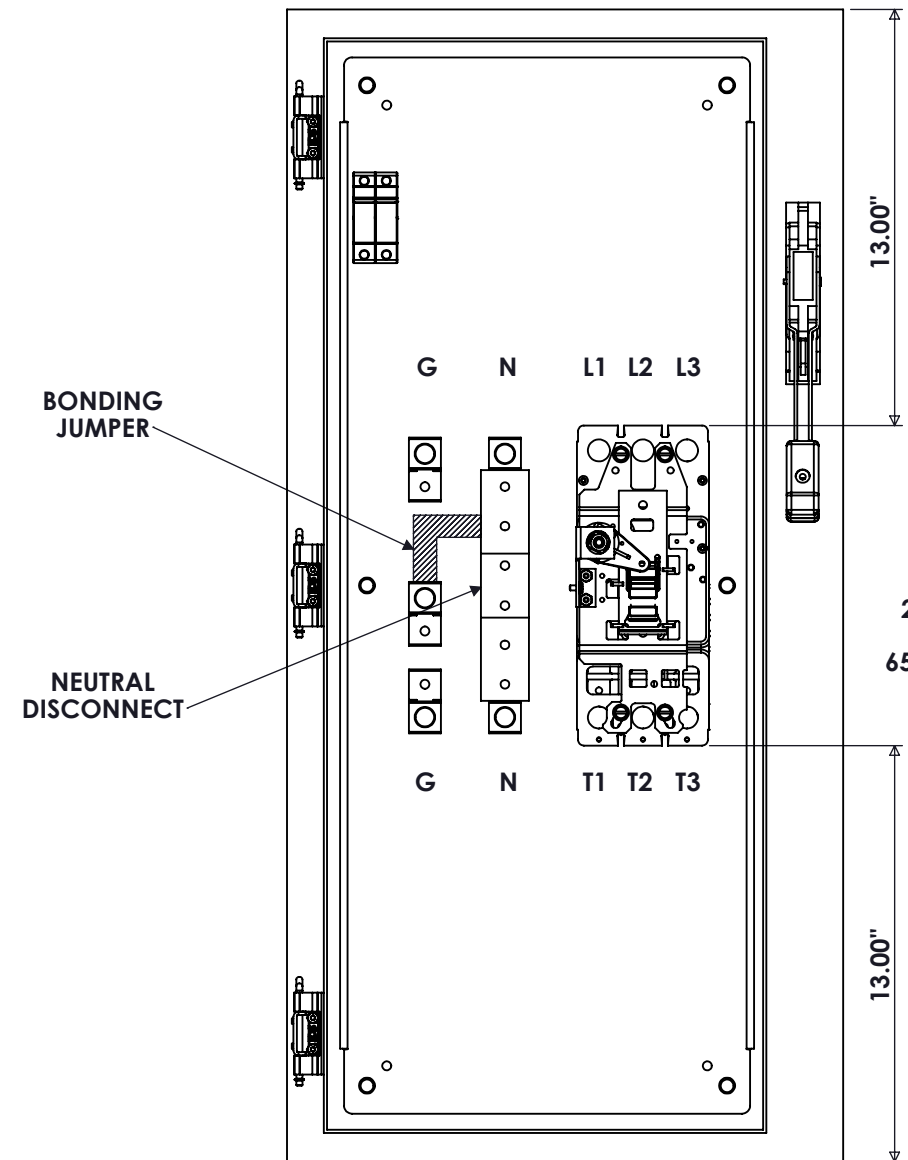

FRONT VIEW
DOOR REMOVED

BREAKER
 200A FRAME
 200A TRIP
 65kAIC @ 480V

 9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

200A, 3-POLE ENCLOSED BREAKER NEMA 4X FLANGE HANDLE			
REV	DESCRIPTION	DATE	DRAWN
0	ORIGINAL RELEASE	8/2/17	S.RICHARDSON
			CHECKED J.RAY
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	DIMENSIONAL
DRAWING NUMBER	ECB200FN4XSE3