



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ  
 RATED CURRENT - 400A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4  
 EST. SHIPPING WEIGHT - 150LBS

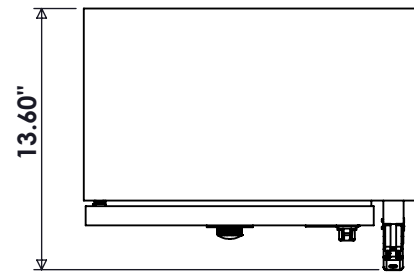


TOP VIEW

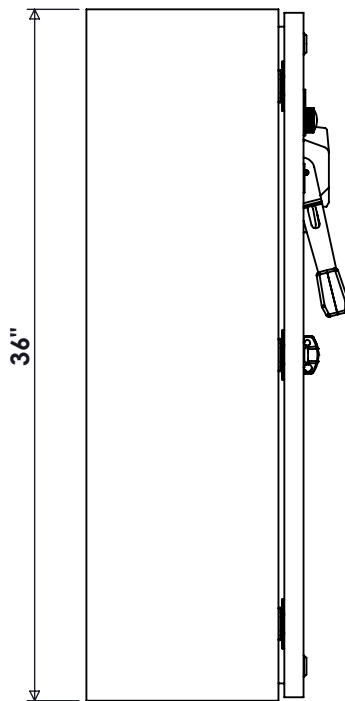


SIDE VIEW

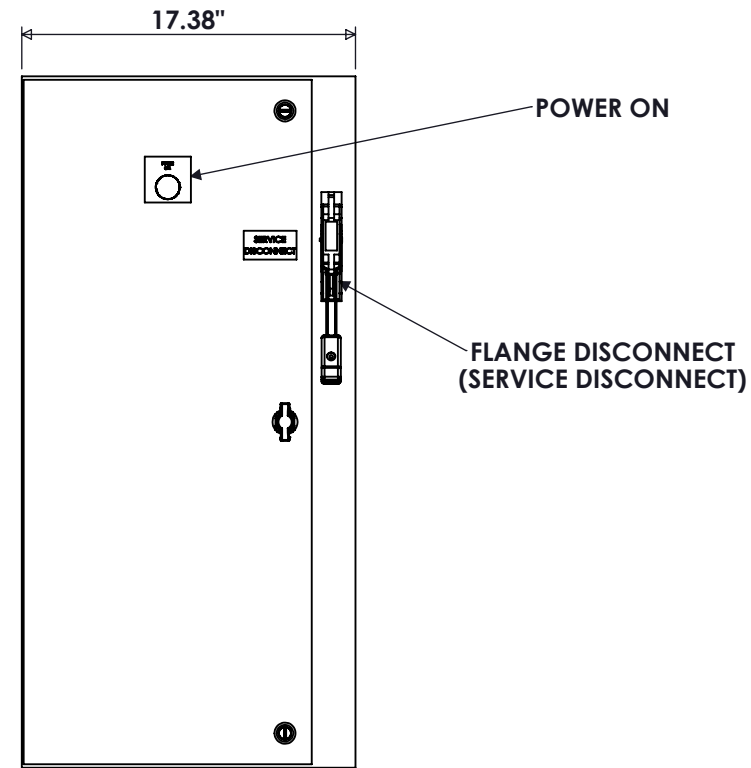

FRONT VIEW

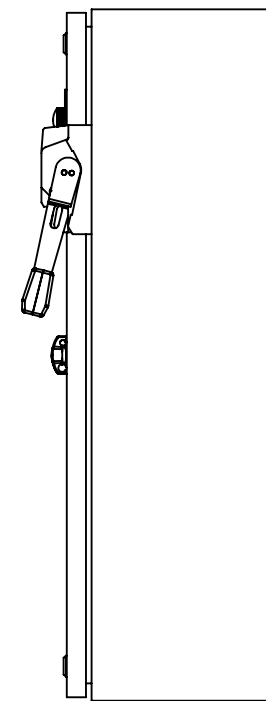


SIDE VIEW

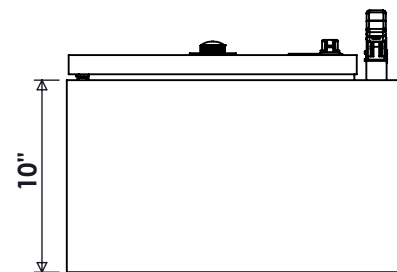

BOTTOM VIEW


**CONNECTIONS**

L1,L2,L3 - (2) 2/0-250MCM / (1) 2/0-500MCM  
 T1,T2,T3 - (2) 2/0-250MCM / (1) 2/0-500MCM  
 N - (2) 1/0-250MCM / (1) #2-750MCM  
 G - #6-350MCM

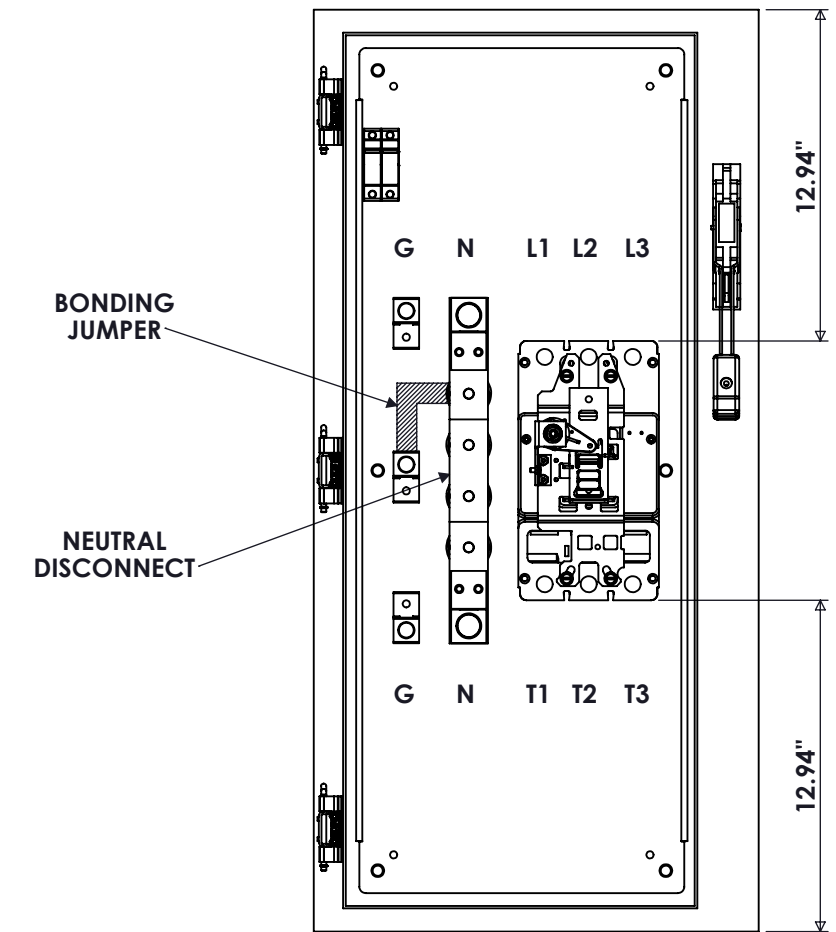

FRONT VIEW  
DOOR REMOVED

**BREAKER**  
 400A FRAME  
 400A TRIP  
 65kAIC @ 480V

 9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

**400A, 3-POLE ENCLOSED BREAKER NEMA 4 FLANGE HANDLE**

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	8/2/17	CHECKED	J.RAY
			SUP. NO	
			SUP. BY NO	
			PANEL NO	
			BUIL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE  
**DIMENSIONAL**

DRAWING NUMBER  
**ECB400FN4SE3**