



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
 RATED CURRENT - 400A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 EST. SHIPPING WEIGHT - 150LBS

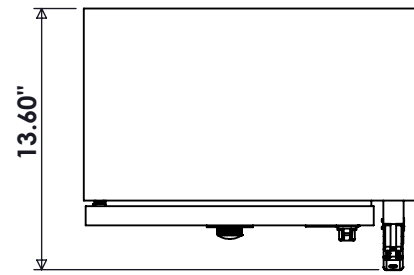


TOP VIEW

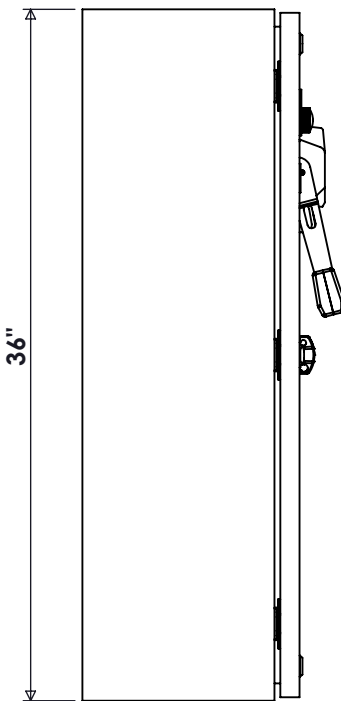


SIDE VIEW

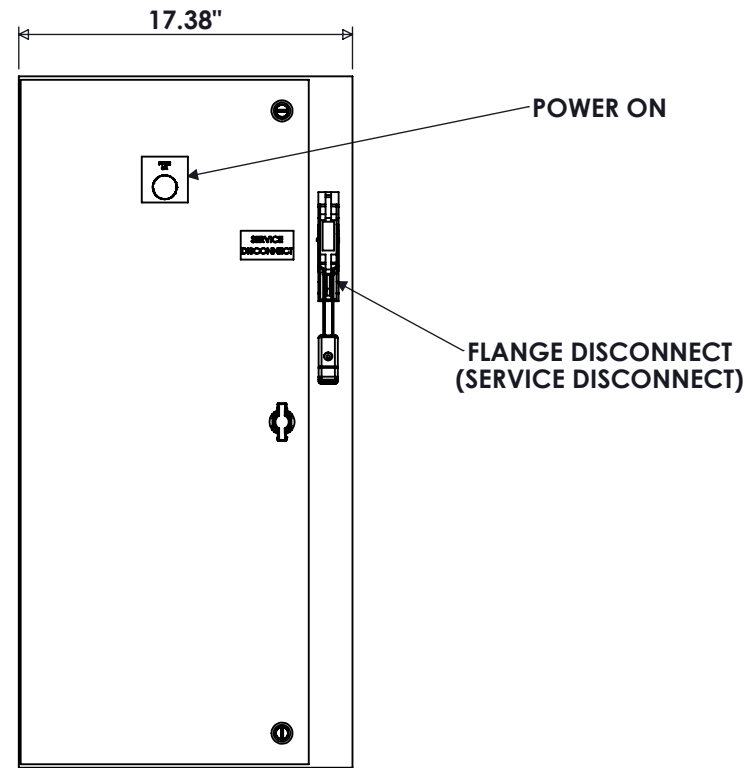

FRONT VIEW

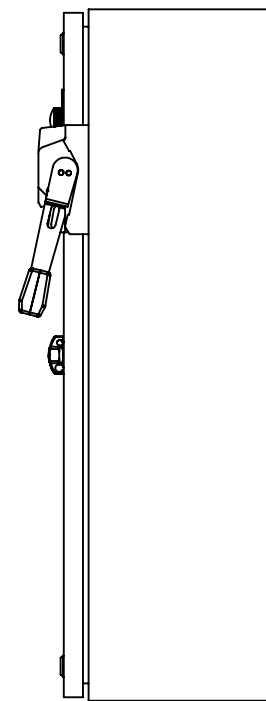


SIDE VIEW

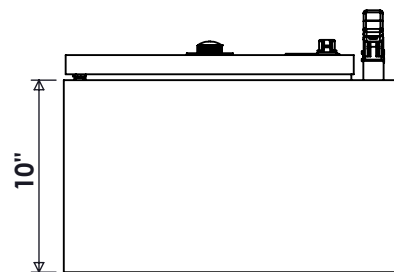

BOTTOM VIEW

CONNECTIONS

L1,L2,L3 - (2) 2/0-250MCM / (1) 2/0-500MCM
 T1,T2,T3 - (2) 2/0-250MCM / (1) 2/0-500MCM
 N - (2) 1/0-250MCM / (1) #2-750MCM
 G - #6-350MCM

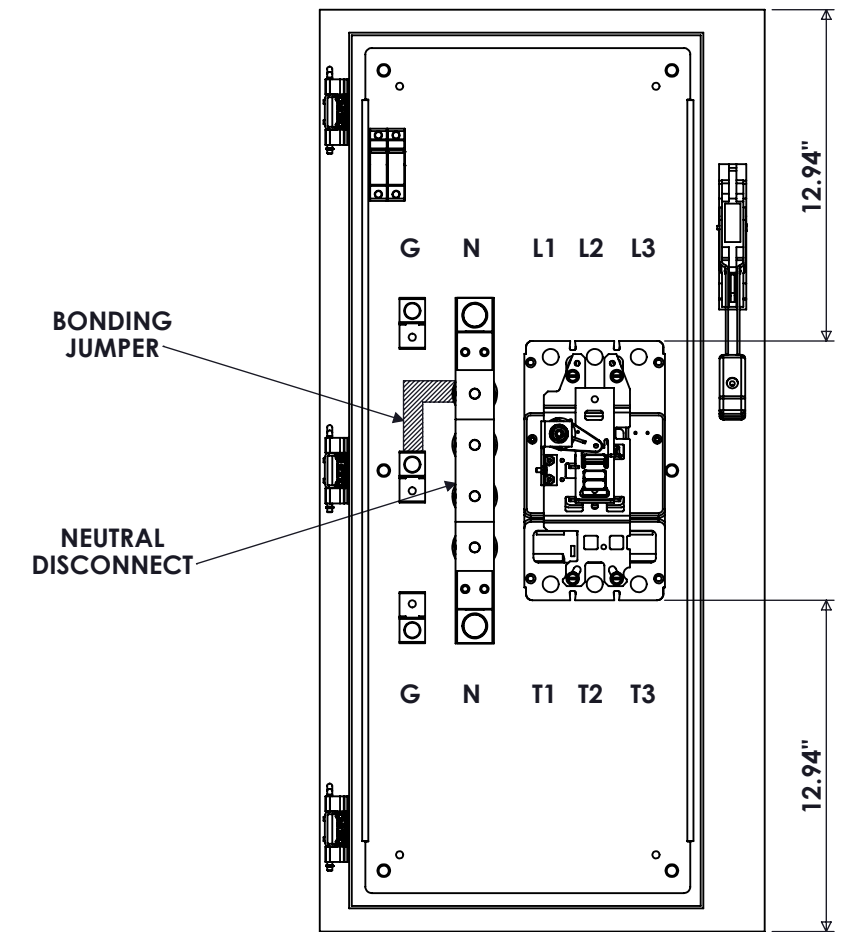

FRONT VIEW
DOOR REMOVED

BREAKER
 400A FRAME
 400A TRIP
 65kAIC @ 480V



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

400A, 3-POLE ENCLOSED BREAKER NEMA 4X FLANGE HANDLE

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	8/2/17	CHECKED	J.RAY
			SUP. NO	
			SUP. BY NO	
			PANEL NO	
			BUIL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE
DIMENSIONAL

DRAWING NUMBER
ECB400FN4XSE3

SHEET 1 OF 1