



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3Φ
 RATED CURRENT - 600A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4
 EST. SHIPPING WEIGHT - 300LBS

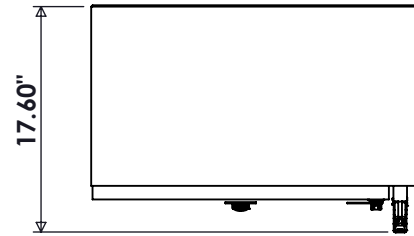


TOP VIEW

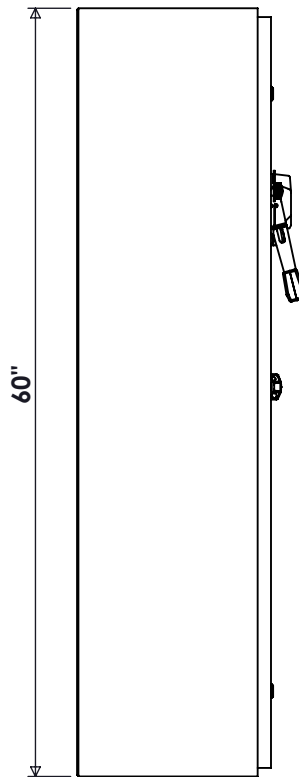


SIDE VIEW

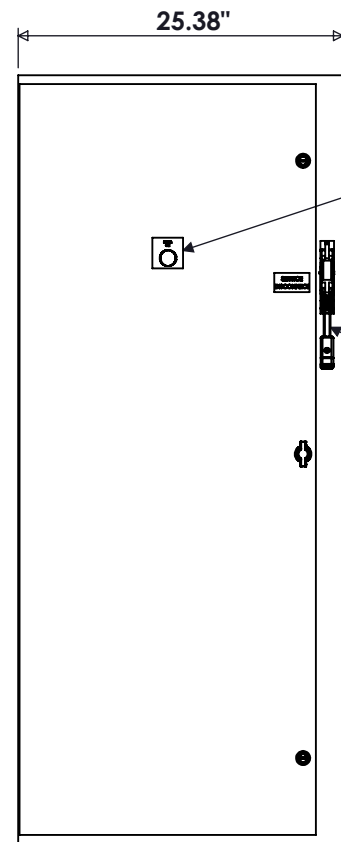

FRONT VIEW

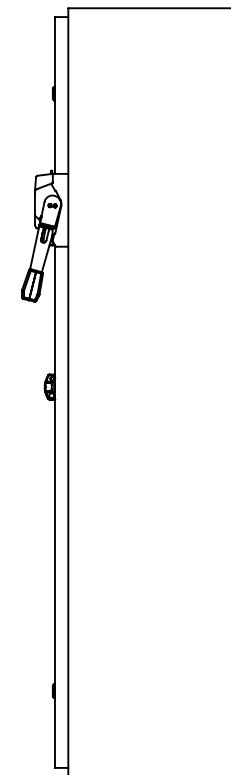


SIDE VIEW

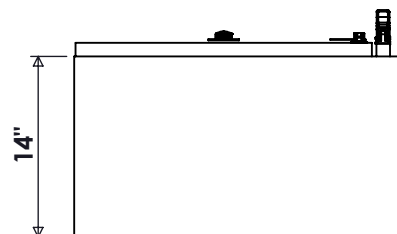

BOTTOM VIEW

CONNECTIONS

L1,L2,L3 - (2) 400-500MCM
 T1,T2,T3 - (2) 400-500MCM
 N - (2) #2-600MCM
 G - #6-350MCM

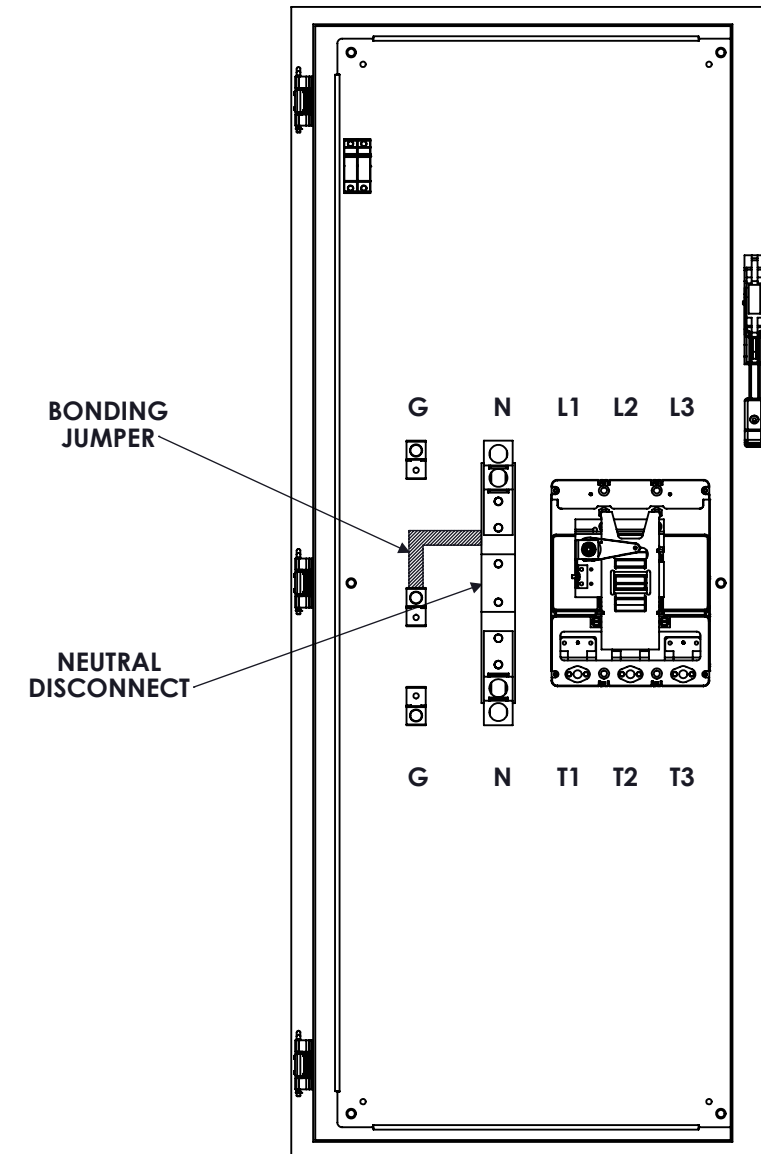


FRONT VIEW
DOOR REMOVED

BREAKER
 600A FRAME
 600A TRIP
 65kAIC @ 480V

600A, 3-POLE ENCLOSED BREAKER NEMA 4 FLANGE HANDLE

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	
0	ORIGINAL RELEASE	8/2/17	CHECKED	J.RAY	
			SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUIL. NO		ECB600FN4SE3
			GROUP NO		
			ORDER NO		

 9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM