
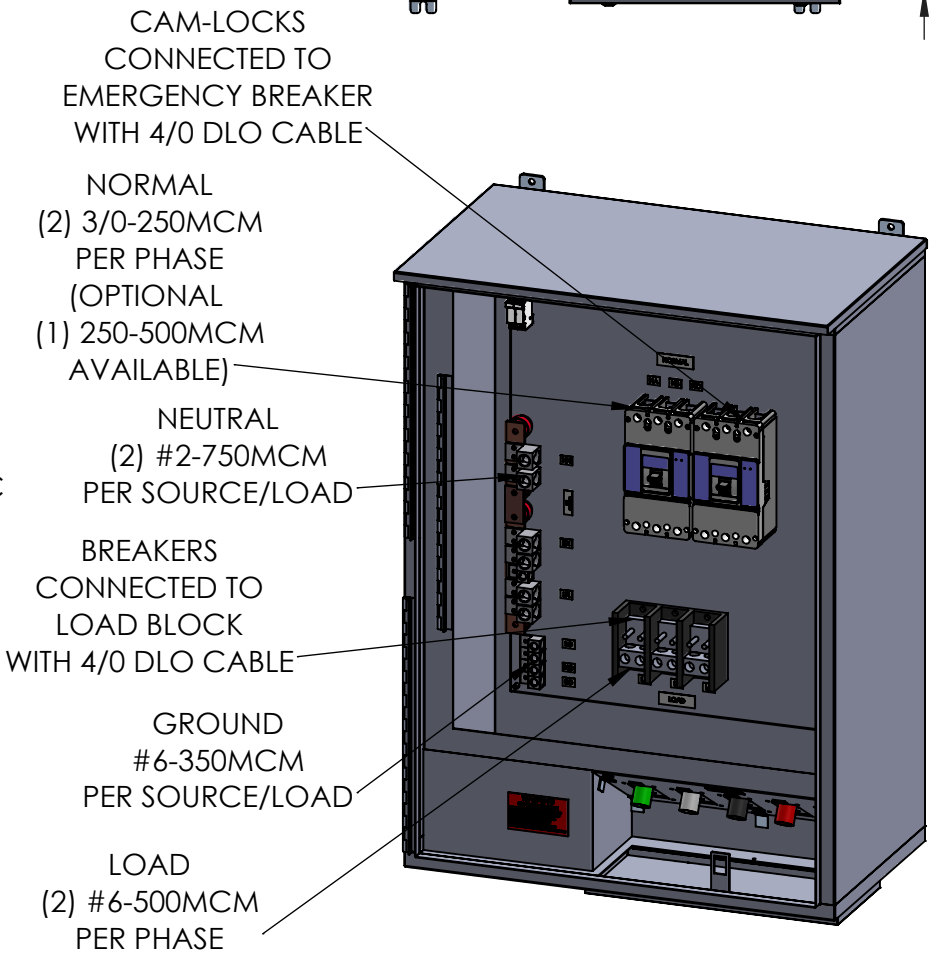
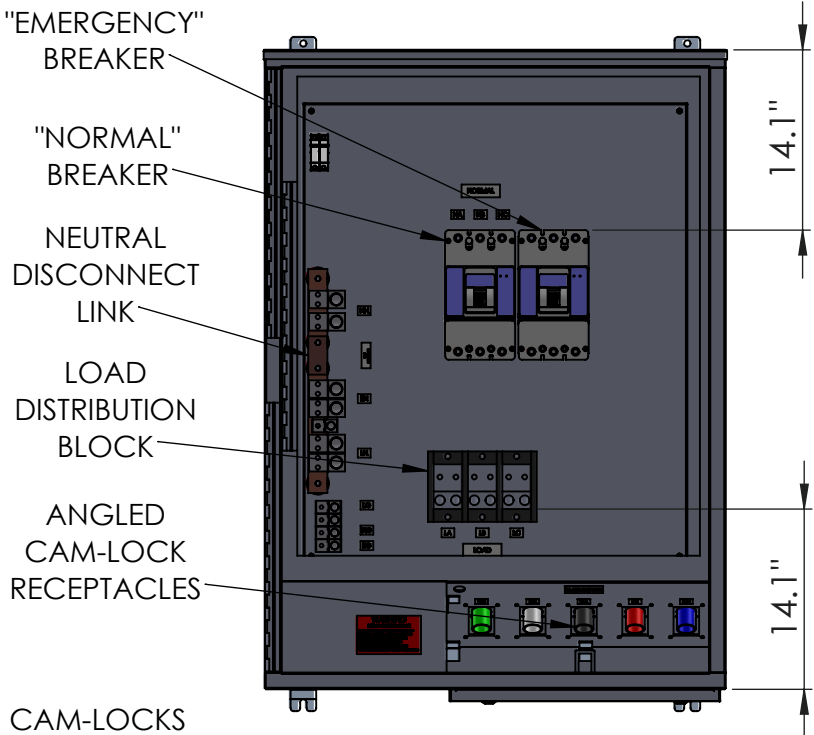
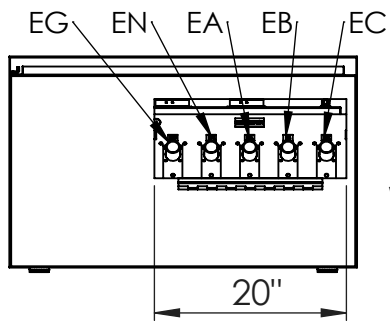
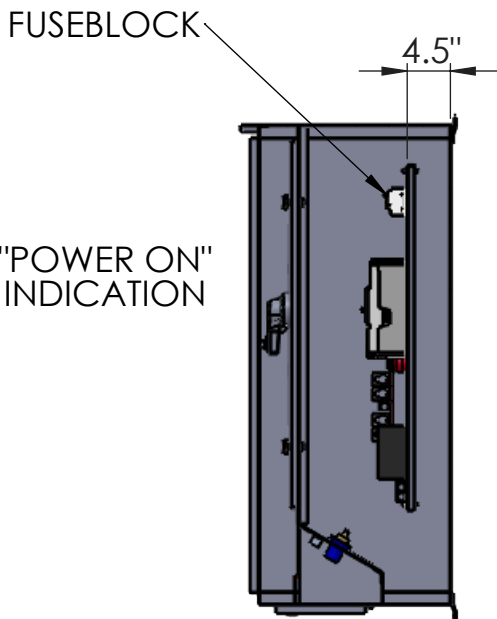
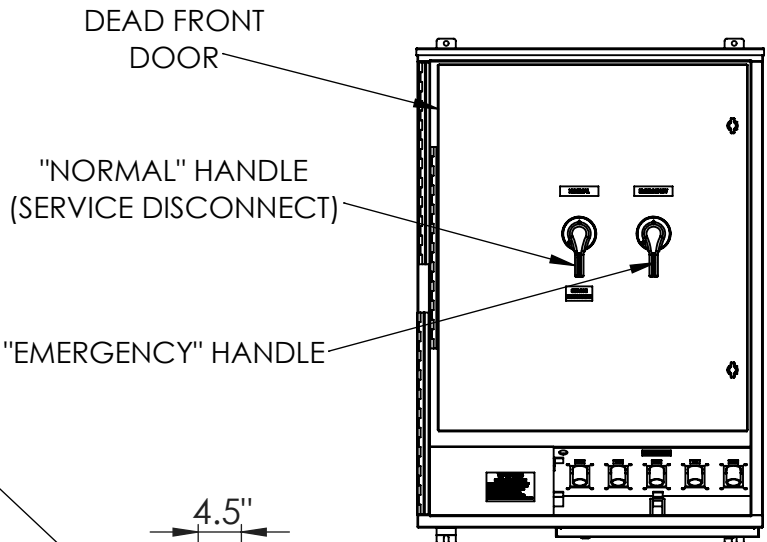
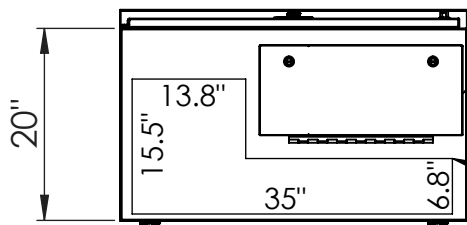
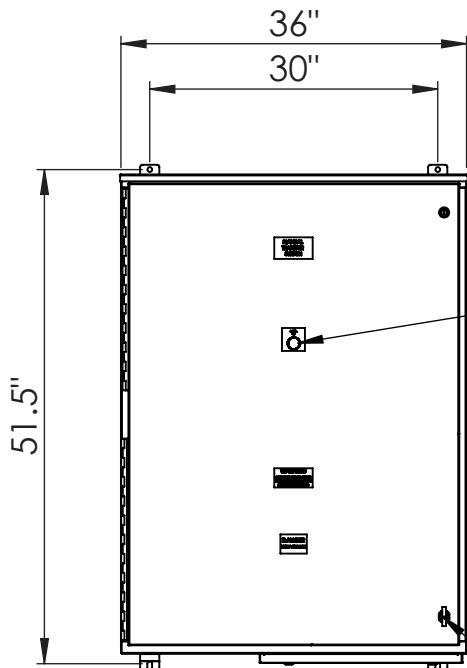
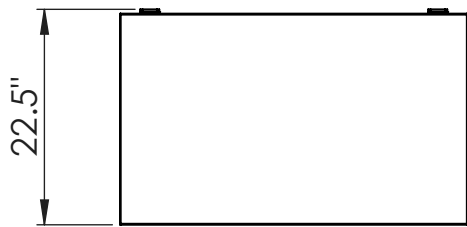


SPECIFICATIONS

MAX VOLTAGE - 600VAC
CURRENT RATING - 400A
ENCLOSURE RATING - NEMA 3R
STANDARDS - UL508A
SUITABLE FOR USE AS SERVICE EQUIPMENT
REF. ES11BTS3A

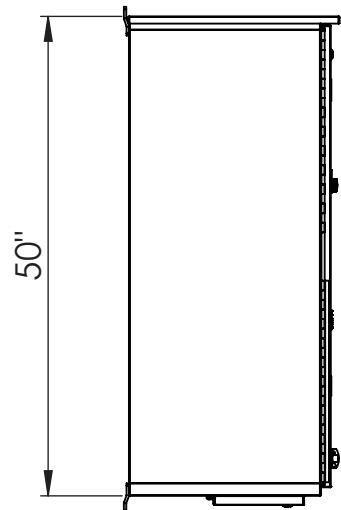

RECEPTACLE COLOR SCHEME

	L1	L2	L3	N	GND
240V	BLK	RED	BLU	WHT	GRN
480V	BRN	ORG	YEL	WHT	GRN
600V	BLK	BLK	BLK	WHT	GRN

NOTE:
BREAKERS ARE MECHANICALLY INTERLOCKED, ONLY ONE CAN BE ENERGIZED AT A TIME.



9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

400A N3R BREAKER-INTERLOCKED MTS GENERATOR TAP BOX

REV	DESCRIPTION	DATE	DRAWN: D. DENNY	
0	ORIGINAL RELEASE	2/5/19	CHECKED:	
			SUP. NO:	DRAWING TYPE
			SUP. BY NO:	DIMENSIONAL
			PANEL NO:	DRAWING NUMBER
			BUL NO:	BBGTB400N3R3
			GROUP NO:	
			ORDER NO:	