

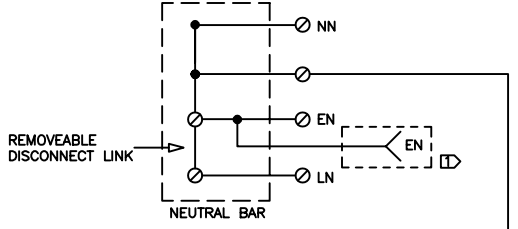



FUSE SIZING  
FU1

VAC	A
208/240	0.6A
480	0.3A



AMPS	BONDING JUMPER		CAM-LOCK	
	MIN. SIZE	MIN. WIRE SIZE	MIN. WIRE SIZE	MIN. WIRE SIZE
60	8 AWG	#6 DLO	#6 DLO	#6 DLO
100	6 AWG	#2 DLO	#2 DLO	#2 DLO
200	4 AWG	3/0 AWG	3/0 AWG	3/0 AWG
400	1/0 AWG	313 DLO	313 DLO	313 DLO
600	2/0 AWG	(2) 313 DLO	(2) 313 DLO	(2) 313 DLO
800	2/0 AWG	3"x1/2" BUSBAR	(2) 313 DLO	(2) 313 DLO
1200	3/0 DLO	3"x1/2" BUSBAR	(3) 313 DLO	(3) 313 DLO
1600	3/0 DLO	3"x1/2" BUSBAR	(4) 4/0 DLO	(4) 4/0 DLO
2000	313 DLO	4"x1/2" BUSBAR	(5) 4/0 DLO	(5) 4/0 DLO
2500	313 DLO	4"x1/2" BUSBAR	(7) 4/0 DLO	(7) 4/0 DLO
3000	313 DLO	(2) 3"x1/2" BUSBAR	(8) 4/0 DLO	(8) 4/0 DLO

- NOTES
- ① EMERGENCY CAM-LOCK CONNECTION OPTION
  - ② PHASE REVERSAL PROTECTION OPTION
  - ③ AUX CONTACTS RATED 10A, 250VAC MAX
  - ④ IF TRUMETER IS USED REFER TO DRAWING ES100145NF3 - METER

9900 TWIN LAKES PARKWAY  
CHARLOTTE, NC 28269  
704-596-5617  
PSICONTROLSOLUTIONS.COM

NON-FUSIBLE MANUAL TRANSFER SWITCH 3-POLE

REV	DESCRIPTION	DATE	DRAWN	C. JUNG
0	ORIGINAL RELEASE	2/28/14	CHECKED	S. BRADLEY
1	ADDED OPTION 2	10/8/14	SUP. NO.	
2	UPDATED TABLE	2/15/15	SUP. BY NO.	
3	UPDATED TABLE	10/28/21	PANEL NO.	
4			BUL. NO.	
5			GROUP NO.	
6			ORDER NO.	

DRAWING TYPE: ELECTRICAL SCHEMATIC  
DRAWING NO.: ES100145NF3

DATE

CUSTOMER APPROVAL