


50" ENCLOSURE HEIGHT


LEFT SIDE

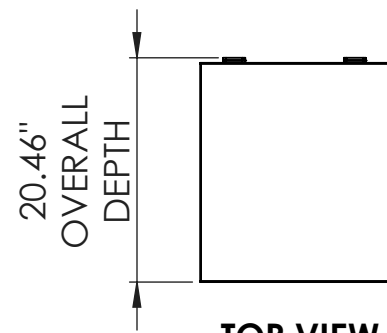

20.46" OVERALL DEPTH

TOP VIEW

17" ENCLOSURE WIDTH

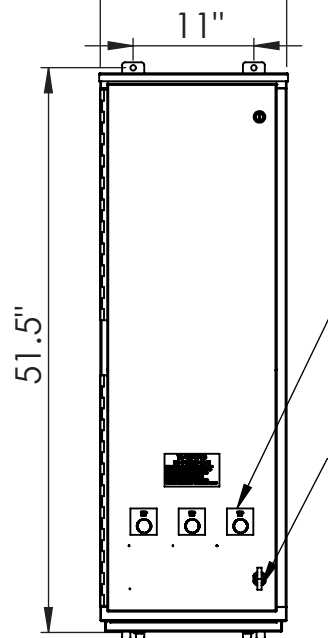


51.5"

FRONT VIEW

PHASE INDICATION LIGHTS (3X)


PADLOCKABLE WINGKNOB LATCH

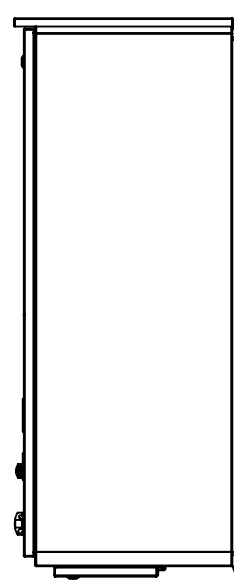


RIGHT SIDE

PERMANENT CONNECTIONS NEUTRAL (2) #2-600 MCM  
PERMANENT CONNECTIONS GROUND (1) #6-350 MCM

PERMANENT CONNECTIONS LINE (2) 2/0-250 MCM

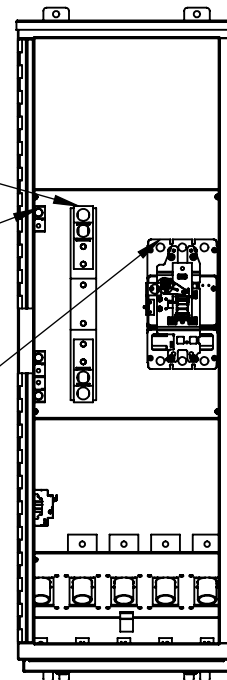


FRONT VIEW (DOORS REMOVED)



BOTTOM VIEW (DOOR OPEN)

G N L1 L2 L3

ROTARY CIRCUIT BREAKER HANDLE MOUNTED TO SWING PANEL

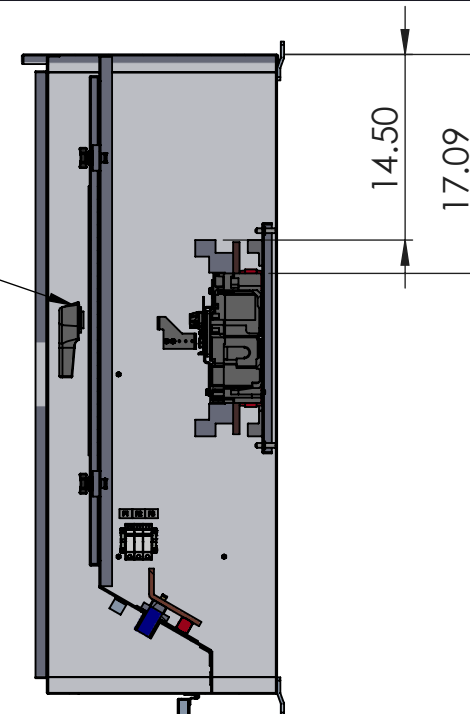


INTERIOR SIDE VIEW


14.50

17.09

ANGLED CAM-LOK RECEPTACLES

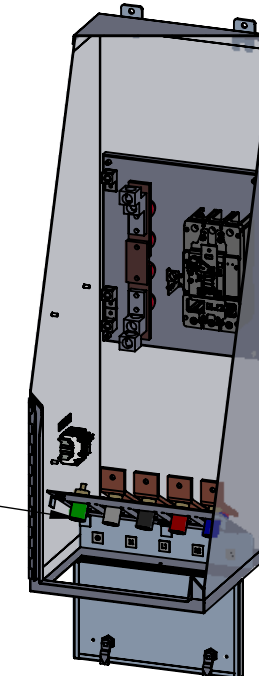

INTERIOR TRIMETRIC VIEW



18" ENCLOSURE DEPTH

BOTTOM VIEW

INTERLOCKED BOTTOM ACCESS DOOR

**NOTES**

1. ENCLOSURE RATED NEMA 3R
2. TYPE 316 STAINLESS STEEL AVAILABLE
3. 3Ø, 4-WIRE SHOWN. ALTERNATE CONFIGURATIONS AVAILABLE
4. MAX VOLTAGE- 600VAC
5. STANDARDS - UL508A

**RECEPTACLE COLOR SCHEME**

	L1	L2	L3	N	GND
240V	BLK	RED	BLU	WHT	GRN
480V	BRN	ORG	YEL	WHT	GRN
600V	BLK	BLK	BLK	WHT	GRN

400A GENERATOR TAP BOX WITH MAIN CIRCUIT BREAKER

REV	DESCRIPTION	DATE	DRAWN: D. DENNY
0	ORIGINAL RELEASE	3/28/18	CHECKED:
			SUP. NO:
			SUP. BY NO:
			PANEL NO:
			BUL. NO:
			GROUP NO:
			ORDER NO:

DRAWING TYPE  
DIMENSIONAL

DRAWING NUMBER  
GTBECB400



9900 TWIN LAKES PARKWAY  
CHARLOTTE, NC 28269  
704-596-5617  
PSICONTROLSOLUTIONS.COM