


SPECIFICATIONS

MAX VOLTAGE - 480VAC 3Φ
 CURRENT RANGE - 1200A
 STANDARDS - UL508A
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 ENCLOSURE RATING - NEMA 3R
 REF ES11BTS3A
 EST SHIPPING WEIGHT - 650 LBS

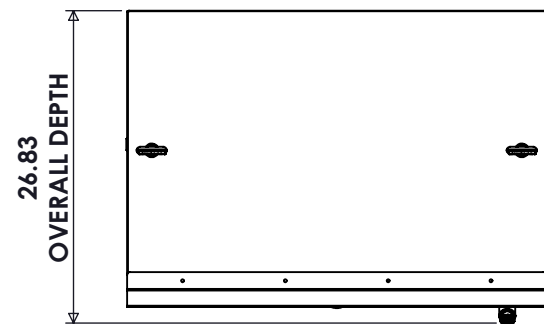

26.83
OVERALL DEPTH

TOP VIEW


36.00
ENCLOSURE WIDTH

"PHASE ROTATION CORRECT" (WHITE)


1

"POWER ON" (WHITE)

PADLOCKABLE DOOR HANDLE

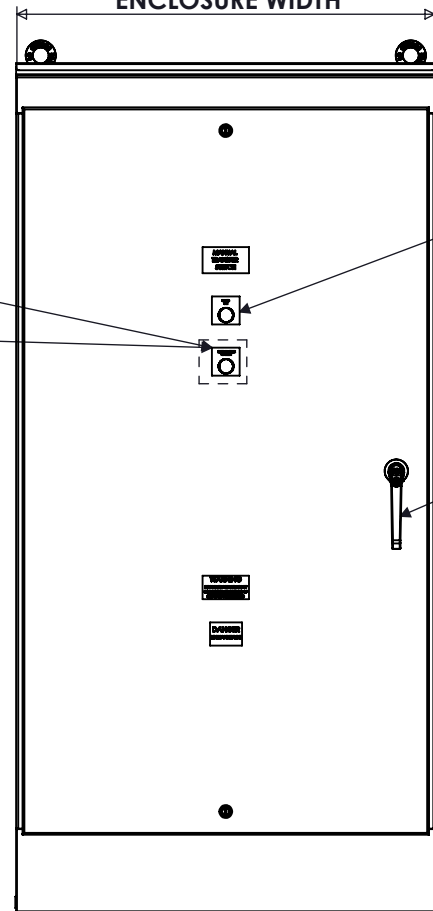

FRONT VIEW

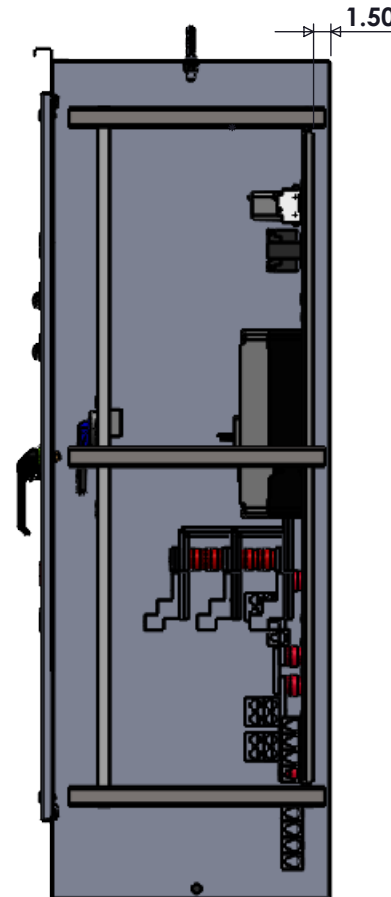


SIDE VIEW

DEAD-FRONT PANEL


KIRK KEY INTERLOCKING (2X)

NORMAL HANDLE SERVICE DISCONNECT

EMERGENCY HANDLE SERVICE DISCONNECT

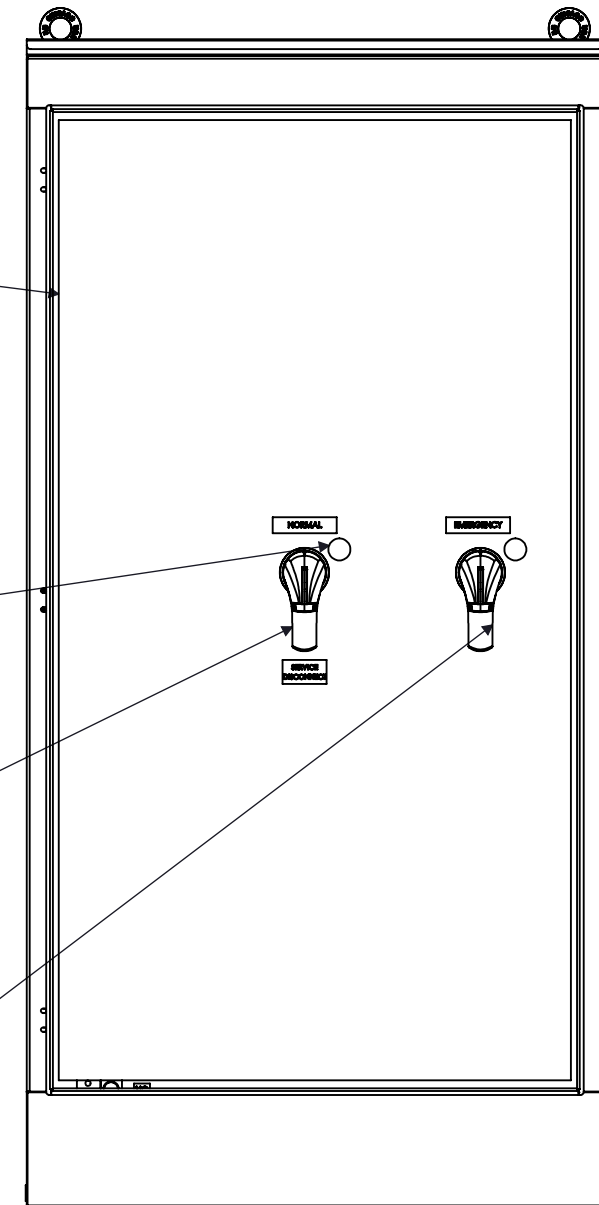


FRONT VIEW REMOVED

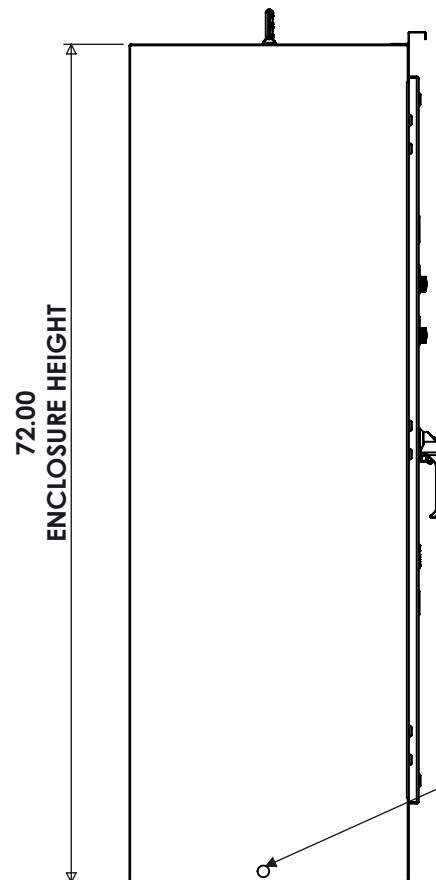

72.00
ENCLOSURE HEIGHT

DRAIN PLUG

SIDE VIEW

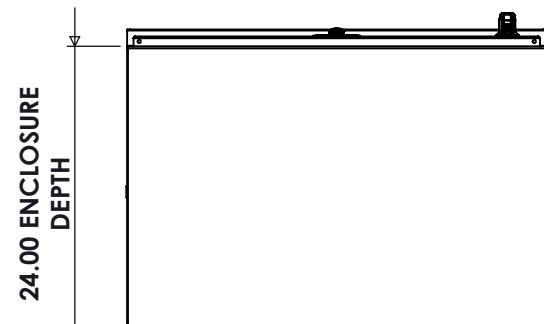

24.00
ENCLOSURE DEPTH

BOTTOM VIEW

OPTIONS NOTES:

- 1) PHASE REVERSAL OPTION




SPECIAL NOTES:

- 1) BREAKERS ARE KIRK KEY INTERLOCKED. ONLY ONE CAN BE ENERGIZED AT A TIME.
- 2) FRAME 5 MUST BE UTILIZED FOR THE BREAKER TO ACCOMODATE THE HARD BUS.

PSI Power & Controls
 9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

1200A NEMA 3R BREAKER-BREAKER TRANSFER SWITCH			
REV	DESCRIPTION	DATE	DRAWN C. JUNG
0	ORIGINAL RELEASE	2/8/17	CHECKED
1	OPTIONS ADDED	10/14/21	SUP. NO
2	HARD BUS ADDED	04/08/22	SUP. BY NO
			PANEL NO
			BUL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE	DIMENSIONAL
DRAWING NUMBER	BTS1200N3RDSE3A

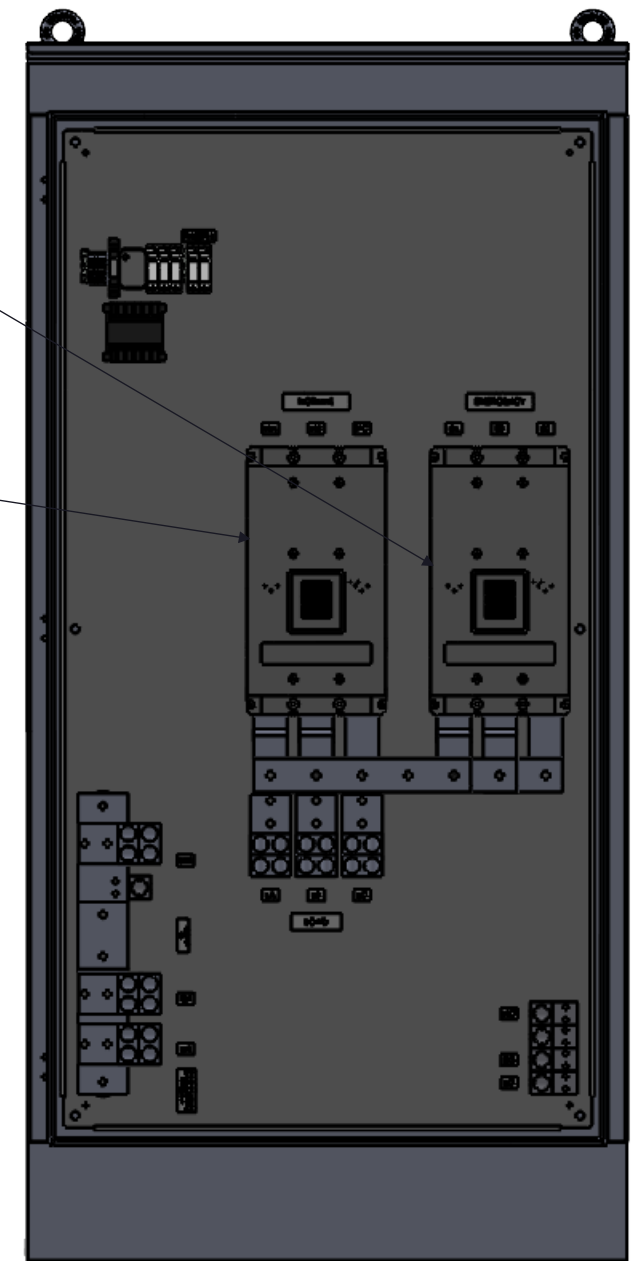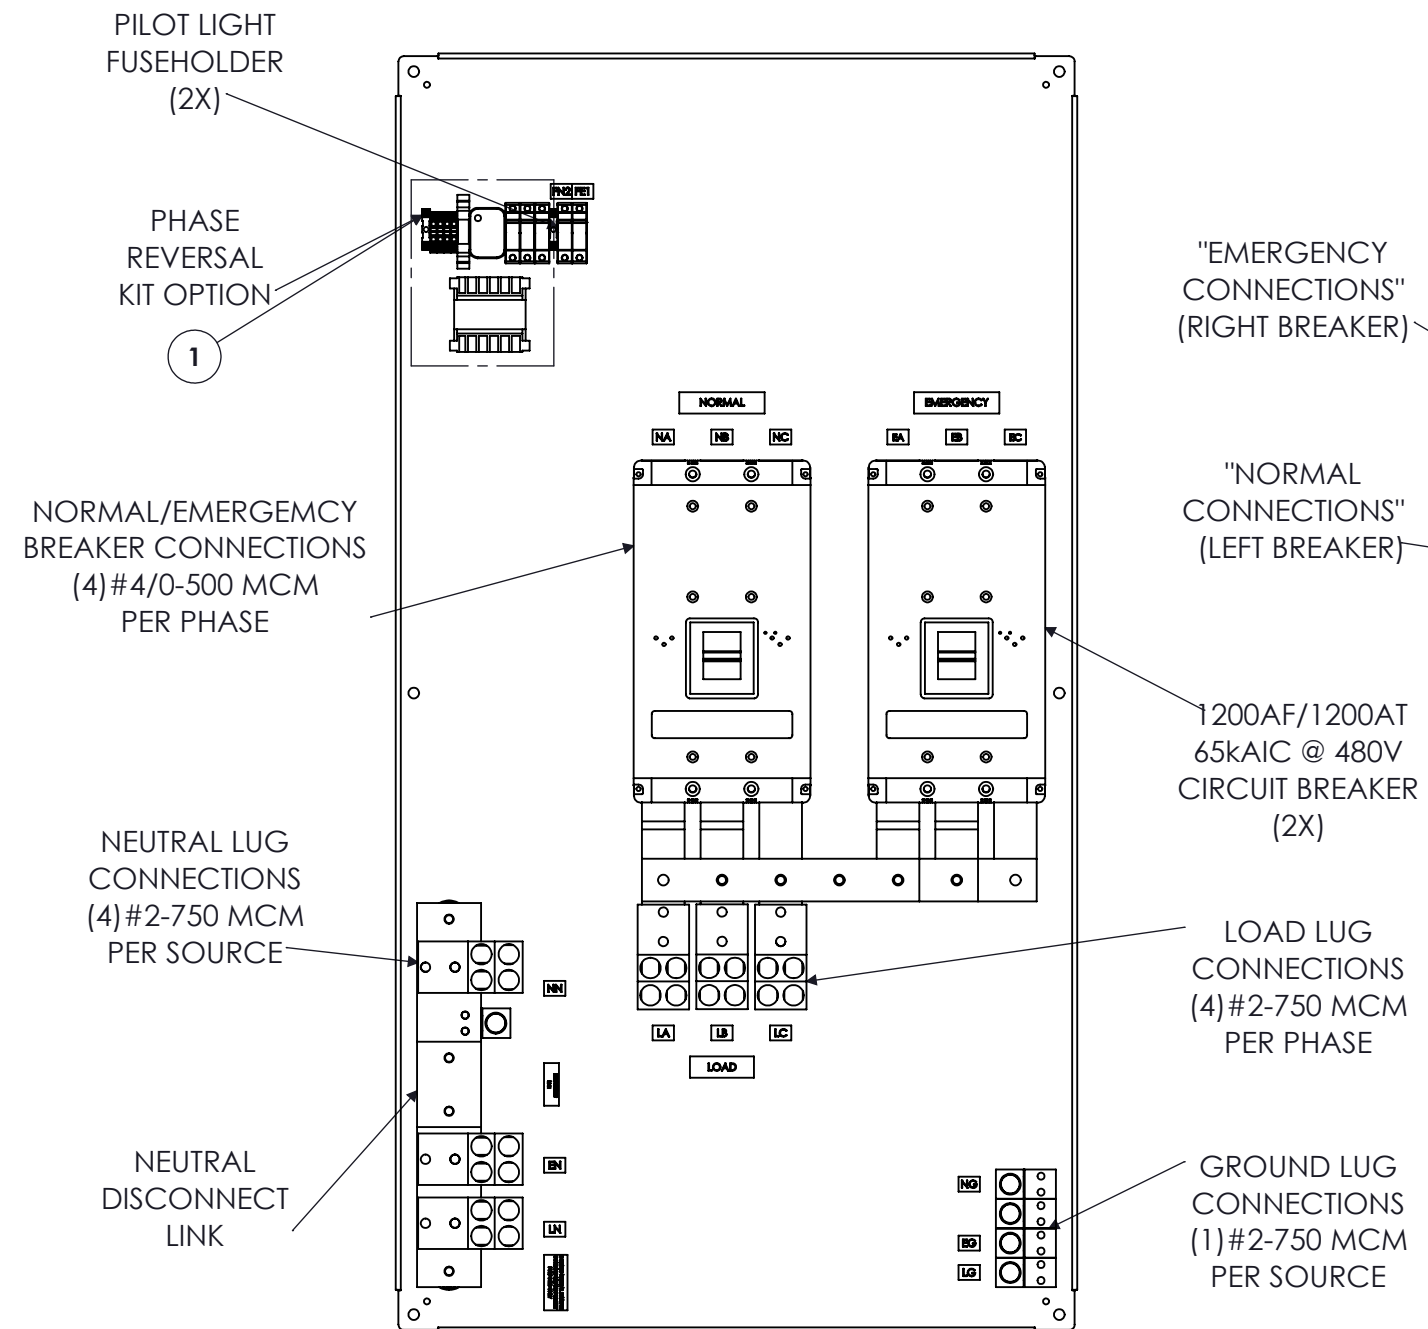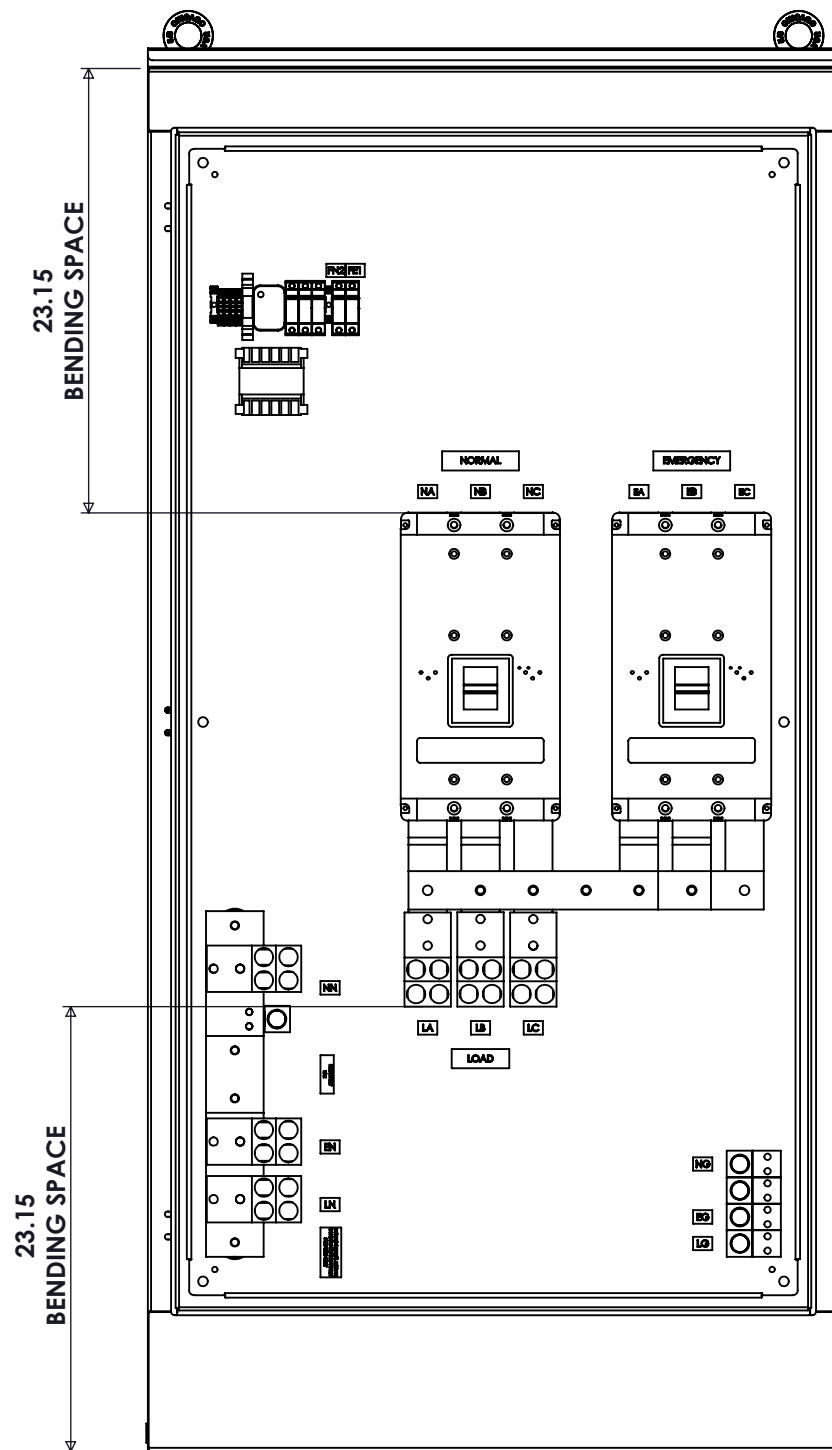

1200A NEMA 3R BREAKER-BREAKER TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	C. JUNG
0	ORIGINAL RELEASE	2/8/17	CHECKED	
1	OPTIONS ADDED	10/14/21	SUP. NO	
2	HARD BUS ADDED	04/08/22	SUP. BY NO	
			PANEL NO	
			BUIL. NO	
			GROUP NO	
			ORDER NO	

DRAWING TYPE
DIMENSIONAL

DRAWING NUMBER
BTS1200N3RDSE3A

PSI
Power & Controls
9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM