



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ  
 RATED CURRENT - 800A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4  
 REF. ES11FD3  
 FUSE CLASS - "L"  
 ENDURANCE - 5000 CYCLES  
 EST. SHIPPING WEIGHT - 225LBS

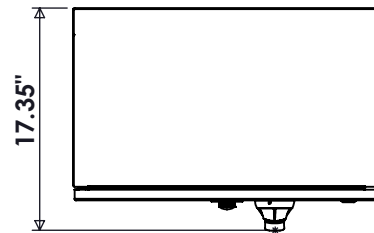

TOP VIEW

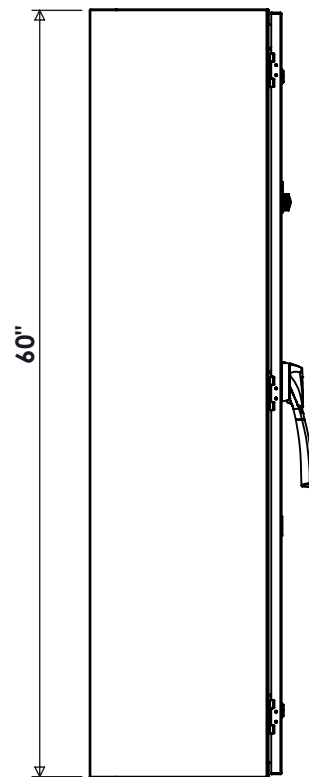


SIDE VIEW

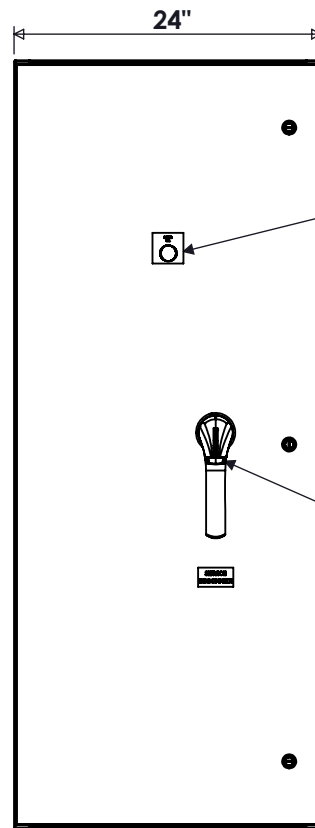


FRONT VIEW

POWER ON

PADLOCKABLE HANDLE  
(SERVICE DISCONNECT)

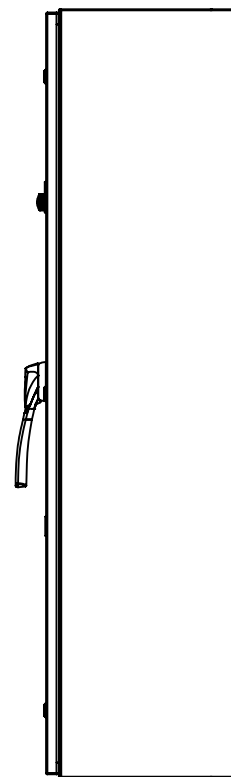


SIDE VIEW

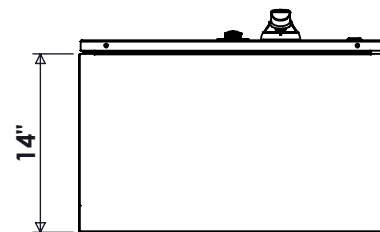

BOTTOM VIEW

**CONNECTIONS**

L1/L2/L3 - (2) #2-600MCM  
 T1/T2/T3 - (2) #2-600MCM  
 N - (2) #2-600MCM  
 G - (1) #6-350MCM

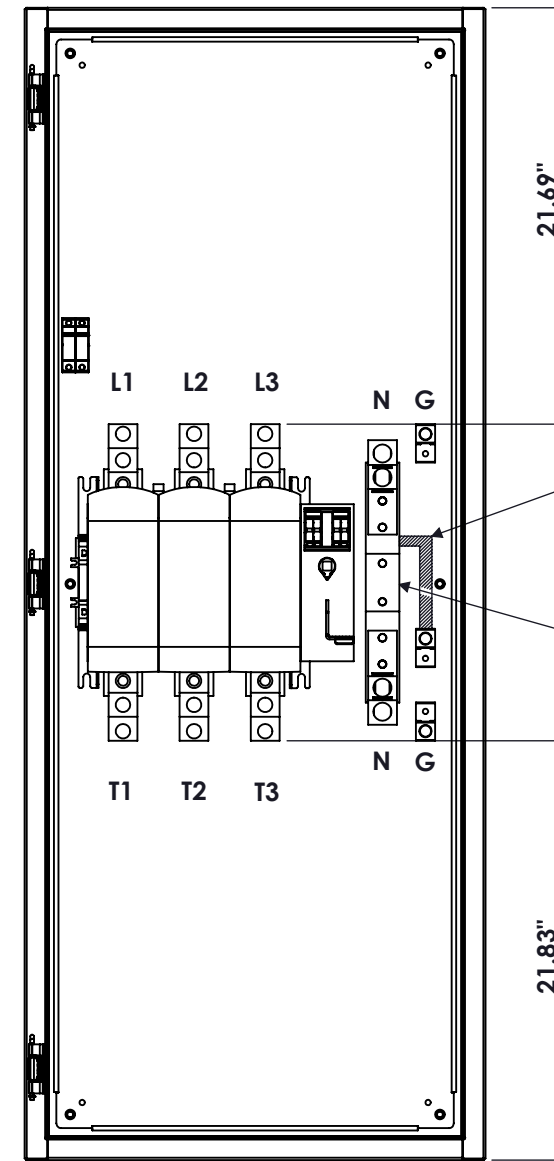

21.69"

21.83"

BONDING JUMPER

NEUTRAL DISCONNECT

FRONT VIEW  
DOOR REMOVED

**NOTES**

- 1: NEUTRAL KIT ONLY PRESENT IF PURCHASED
- 2: PANEL IS RATED SUITABLE FOR USE AS SERVICE EQUIPMENT WITH NEUTRAL KIT

800A ENCLOSED FUSIBLE DISCONNECT NEMA 4

| REV | DESCRIPTION      | DATE     | DRAWN      | S.RICHARDSON |
|-----|------------------|----------|------------|--------------|
| 0   | ORIGINAL RELEASE | 11/14/16 | CHECKED    |              |
|     |                  |          | SUP. NO    |              |
|     |                  |          | SUP. BY NO |              |
|     |                  |          | PANEL NO   |              |
|     |                  |          | BUIL. NO   |              |
|     |                  |          | GROUP NO   |              |
|     |                  |          | ORDER NO   |              |

DRAWING TYPE  
**DIMENSIONAL**

DRAWING NUMBER  
**FD800LN4**



9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM