



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3 $\phi$   
 RATED CURRENT - 1200 A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4X  
 TYPE 316 STAINLESS STEEL  
 REF. ES100145BF  
 DURABILITY - 3550 CYCLES  
 EST SHIPPING WEIGHT - 750LBS

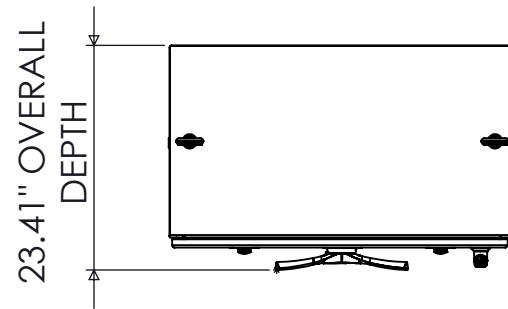


TOP VIEW

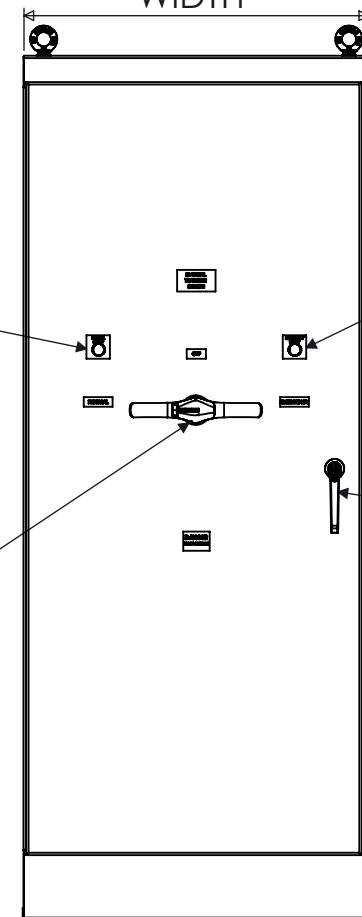


FRONT VIEW

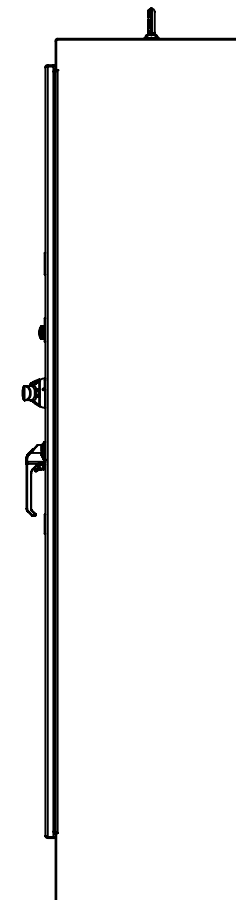

SIDE VIEW

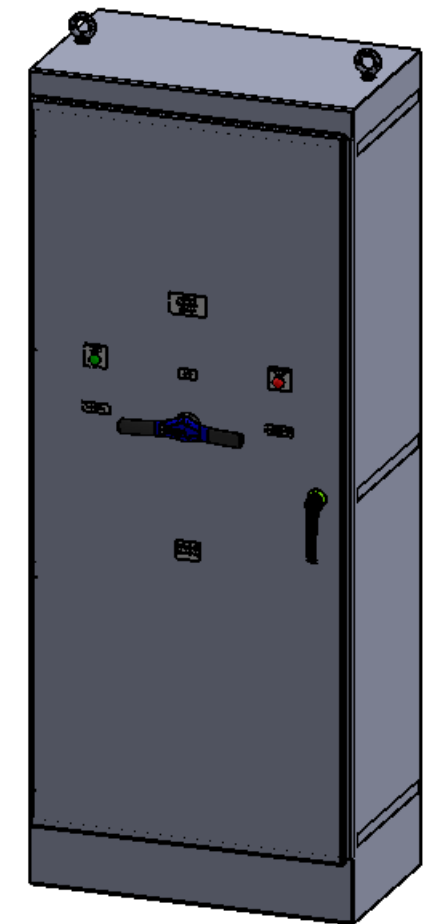


DIMETRIC VIEW

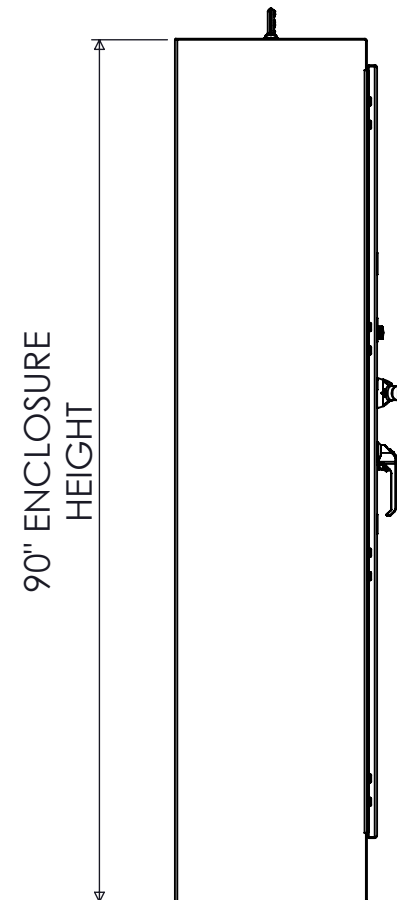

SIDE VIEW

90" ENCLOSURE HEIGHT

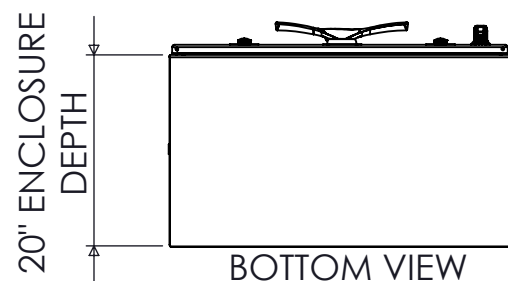


BOTTOM VIEW

20" ENCLOSURE DEPTH


**1200A FUSIBLE 3-POLE NEMA 4X MANUAL TRANSFER SWITCH**

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	2/3/14	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	DIMENSIONAL
			PANEL NO	DRAWING NUMBER
			BUL. NO	STS1200N4XBF3
			GROUP NO	
			ORDER NO	


 9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

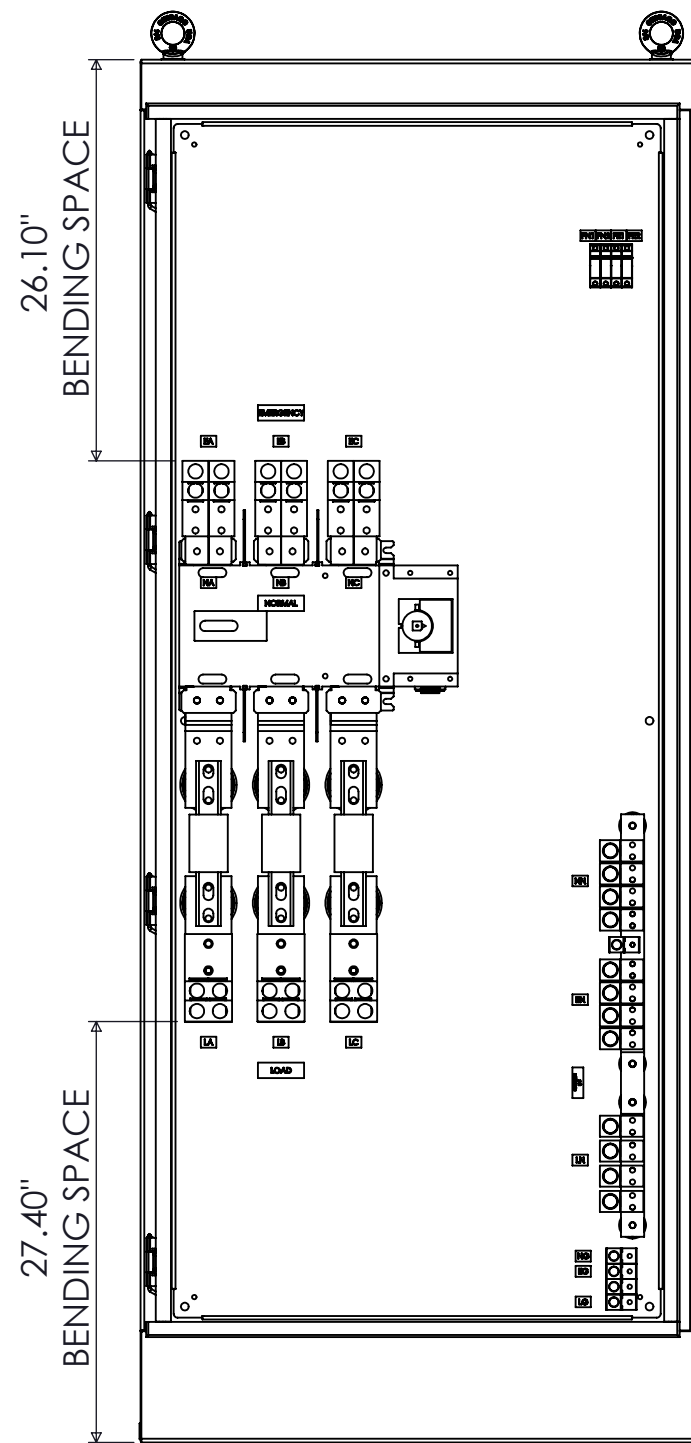

FRONT VIEW  
DOOR REMOVED

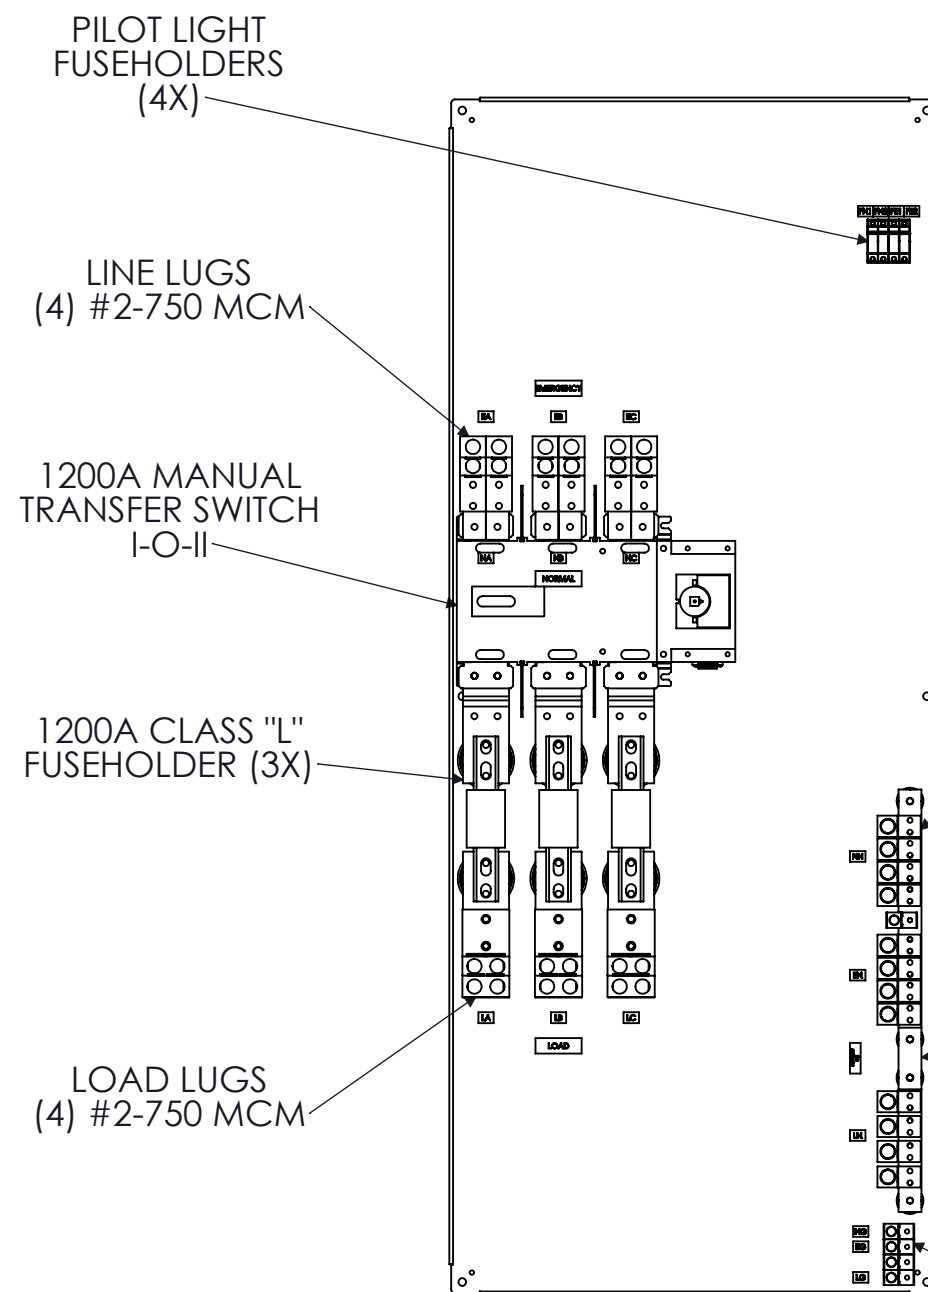

FRONT VIEW  
ENCLOSURE REMOVED


"EMERGENCY"  
CONNECTIONS  
(REAR)

"NORMAL"  
CONNECTIONS  
(FRONT)

NEUTRAL LUGS  
(4) #2-750 MCM

NEUTRAL  
DISCONNECTING  
MEANS

GROUND LUGS  
(1) #6-350 MCM

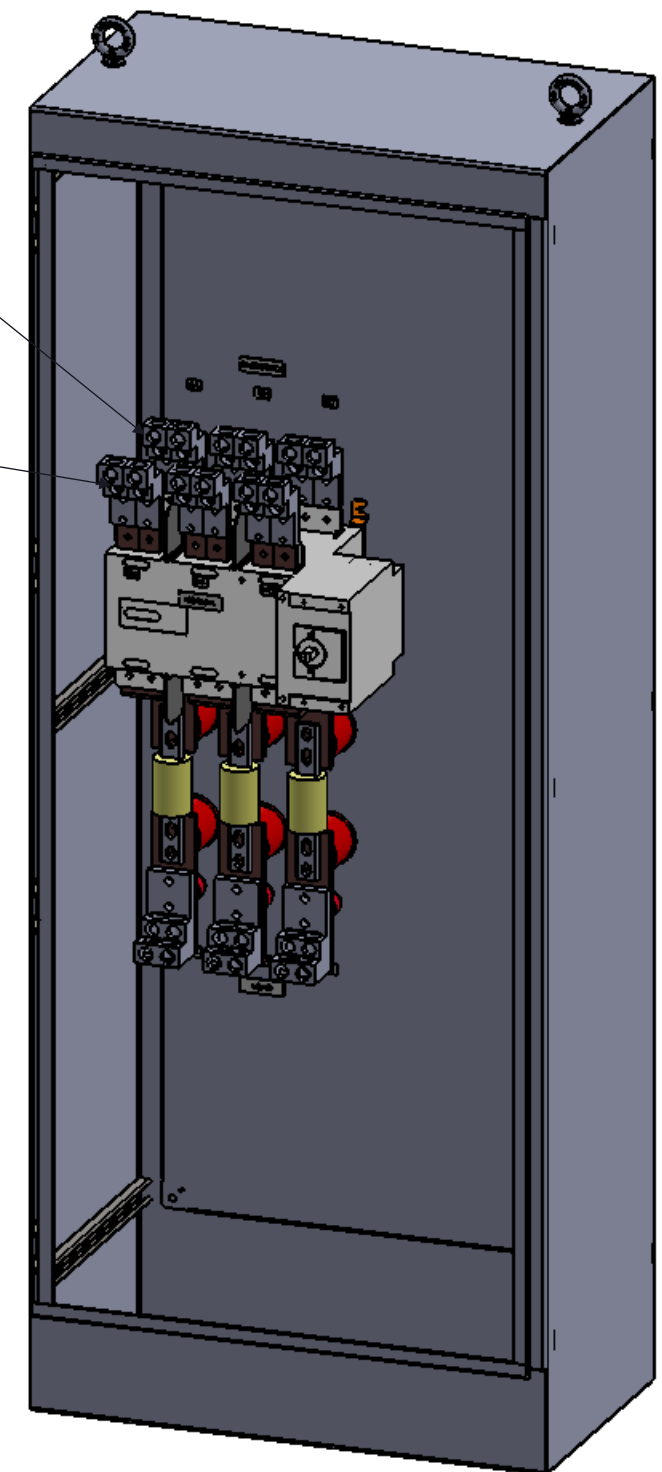

DIMETRIC VIEW  
DOOR REMOVED

NOTE: FUSES PROVIDED IF PURCHASED  
480VAC : KRP-C-1200SP



9900 TWIN LAKES PARKWAY  
CHARLOTTE, NC 28269  
704-596-5617  
PSICONTROLSOLUTIONS.COM

1200A FUSIBLE 3-POLE NEMA 4X MANUAL TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED
0	ORIGINAL RELEASE	2/3/14			
			SUP. NO		
			SUP. BY NO		
			PANEL NO		
			BUL. NO		
			GROUP NO		
			ORDER NO		

DRAWING TYPE  
**OUTLINE**

DRAWING NUMBER  
**STS1200N4XBF3**