

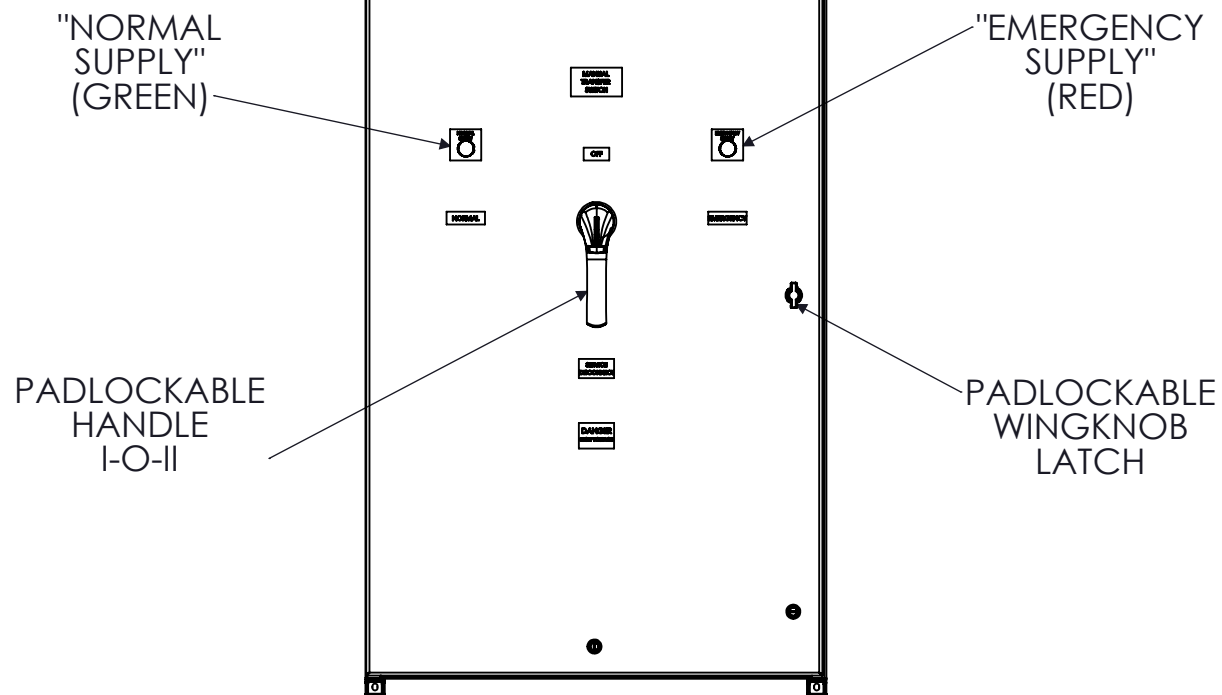
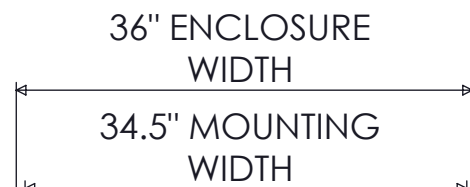


SPECIFICATIONS


MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 400 A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF. ES100145BF
 DURABILITY - 6050 CYCLES
 EST SHIPPING WEIGHT - 350LBS

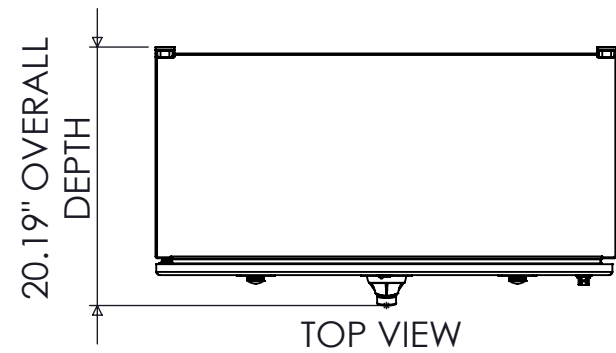



FRONT VIEW

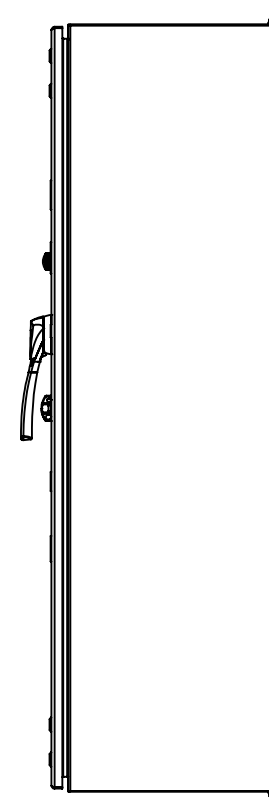

SIDE VIEW

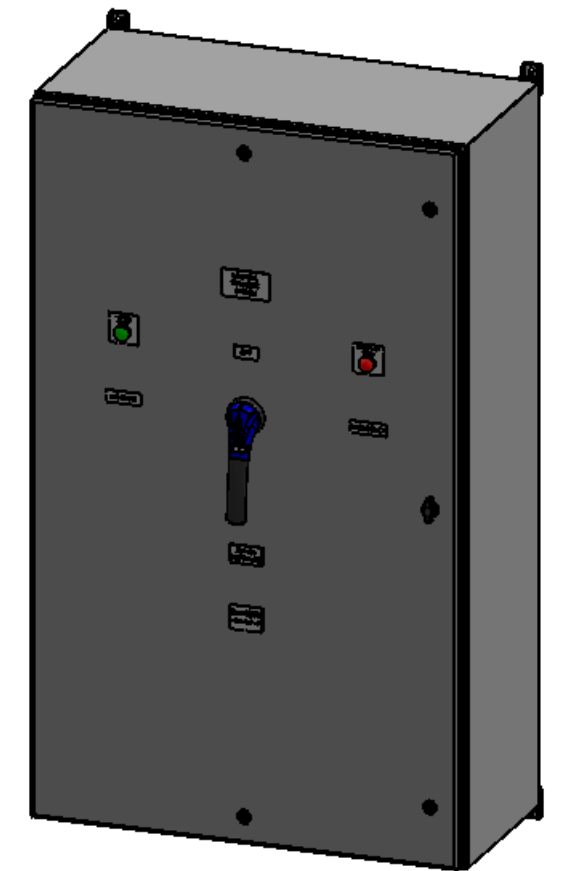

DIMETRIC VIEW

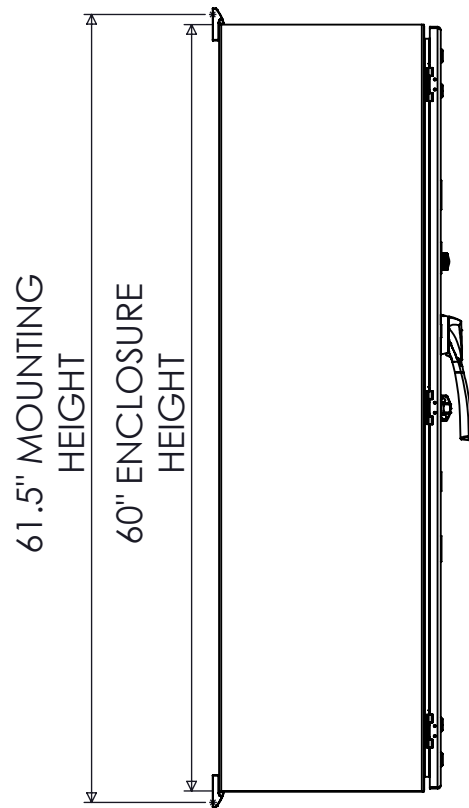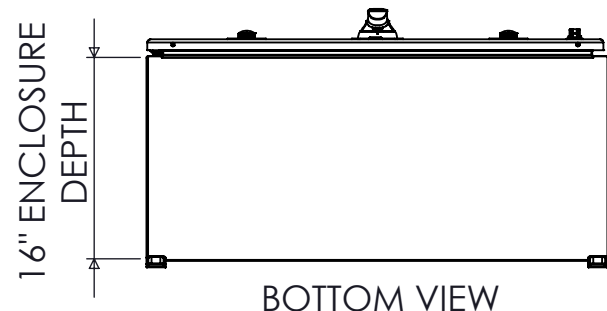


SIDE VIEW

400A FUSIBLE 3-POLE NEMA 4X MANUAL TRANSFER SWITCH


REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	CHECKED
0	ORIGINAL RELEASE	1/10/14			
			SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUIL. NO		STS400N4XBF3
			GROUP NO		
			ORDER NO		



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

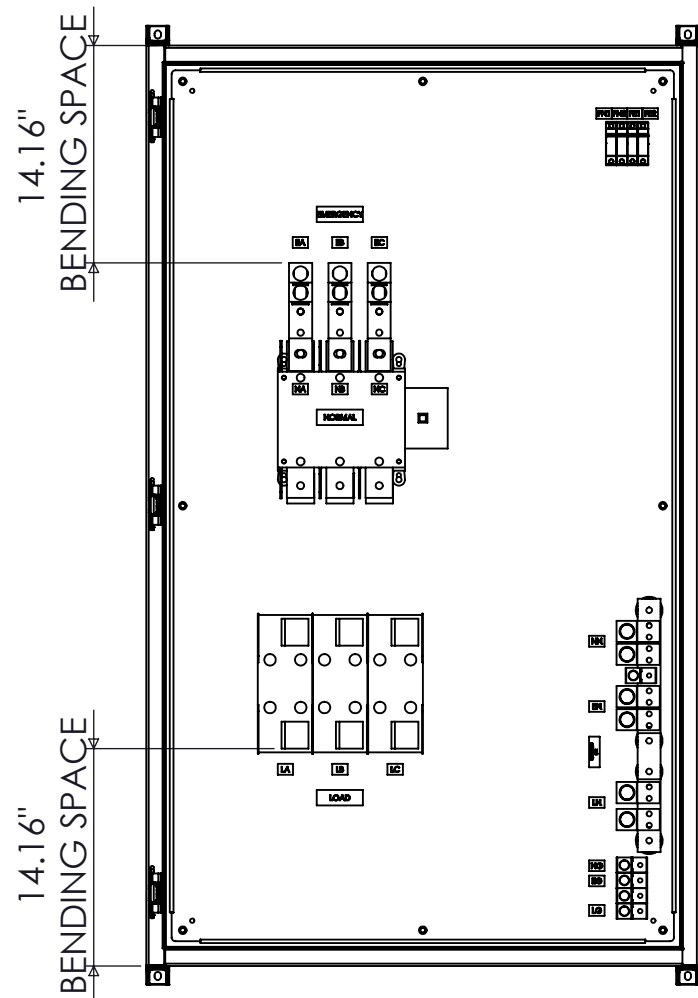


FRONT VIEW
DOOR REMOVED

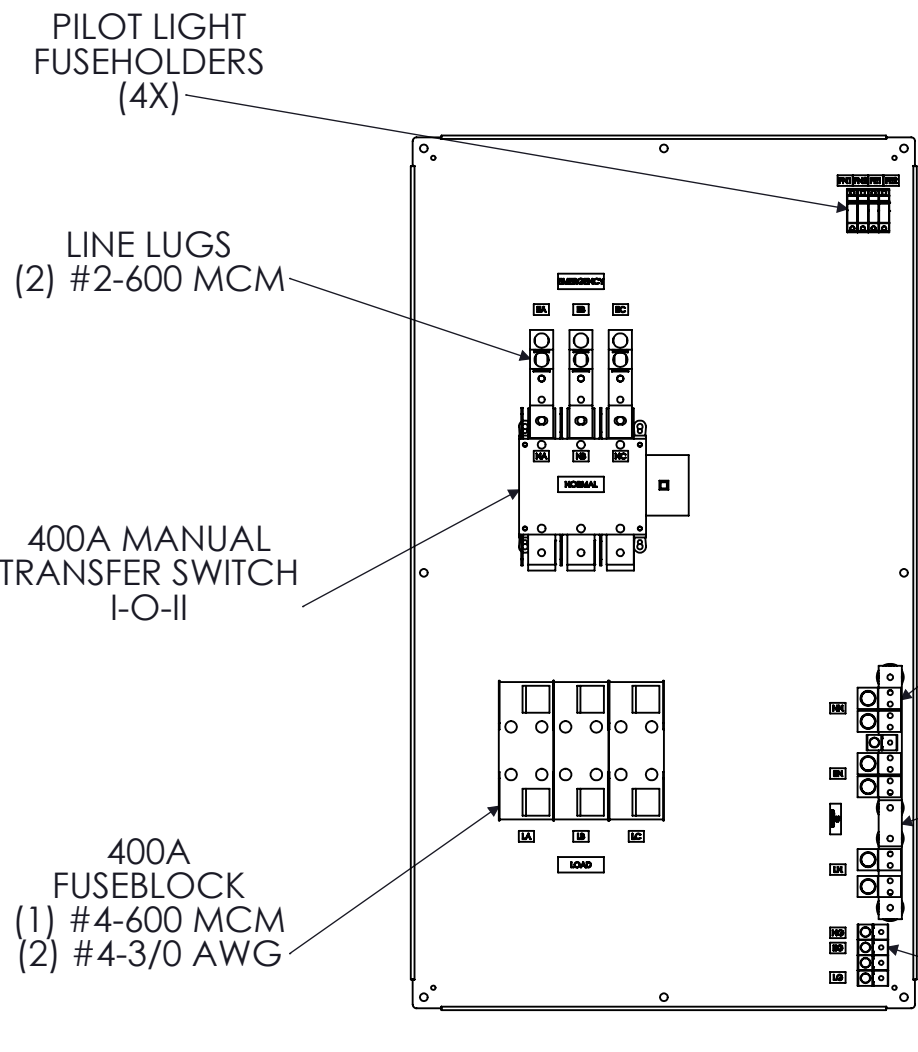

FRONT VIEW
ENCLOSURE REMOVED

- "EMERGENCY" CONNECTIONS (REAR)
- "NORMAL" CONNECTIONS (FRONT)
- NEUTRAL LUGS (2) #2-750 MCM
- NEUTRAL DISCONNECTING MEANS
- GROUND LUGS (1) #6-350 MCM

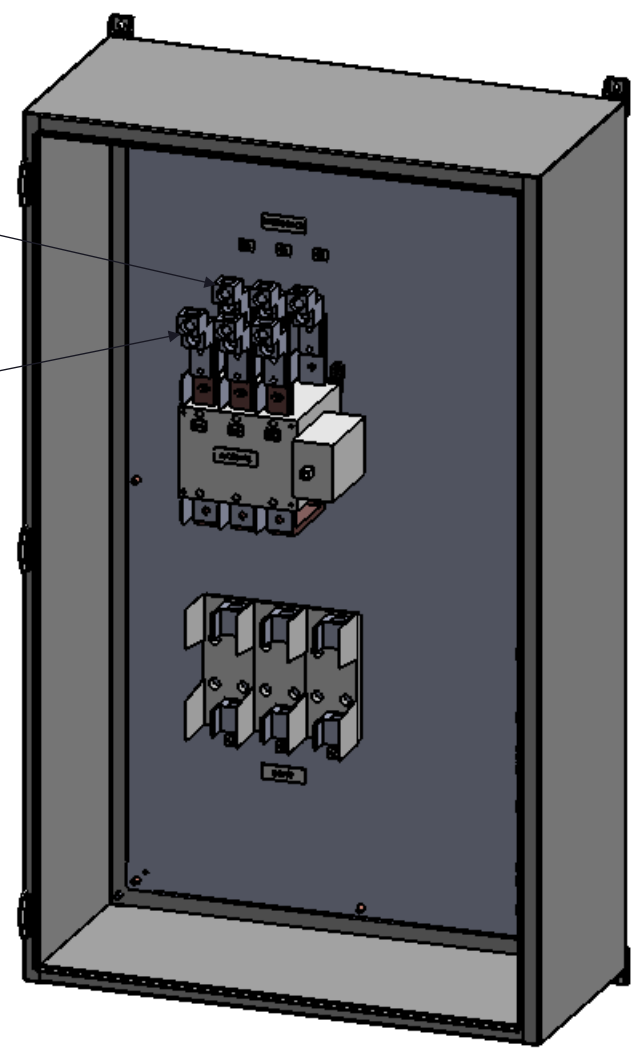

DIMETRIC VIEW
DOOR REMOVED

PILOT LIGHT FUSEHOLDERS (4X)

LINE LUGS (2) #2-600 MCM

400A MANUAL TRANSFER SWITCH I-O-II

400A FUSEBLOCK (1) #4-600 MCM (2) #4-3/0 AWG

NOTE: FUSES PROVIDED IF PURCHASED
208-240VAC : FRN-R-400
480-600VAC : LPJ-400SP



9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

400A FUSIBLE 3-POLE NEMA 4X MANUAL TRANSFER SWITCH				
REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	1/10/14	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	OUTLINE
			PANEL NO	DRAWING NUMBER
			BUL. NO	STS400N4XBF3
			GROUP NO	
			ORDER NO	