



SPECIFICATIONS


MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 400 A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 4X
 TYPE 316 STAINLESS STEEL
 REF. ES100145BF3
 DURABILITY - 6050 CYCLES
 EST SHIPPING WEIGHT - 350LBS

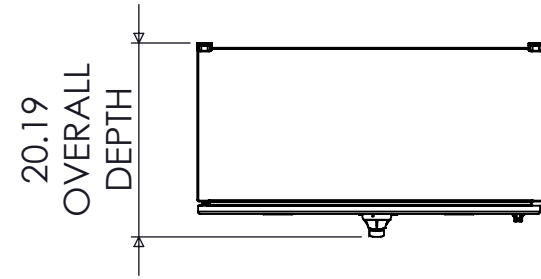

TOP VIEW

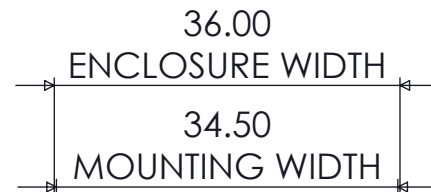

FRONT VIEW

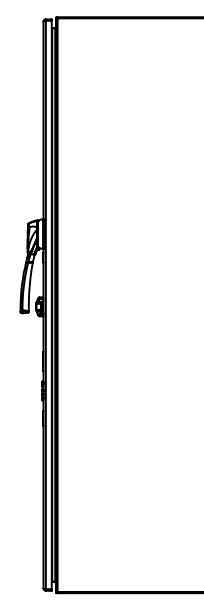

SIDE VIEW




DIMETRIC VIEW



SIDE VIEW

PADLOCKABLE
HANDLE
I-O-II

PADLOCKABLE
WINGNOB
LATCH

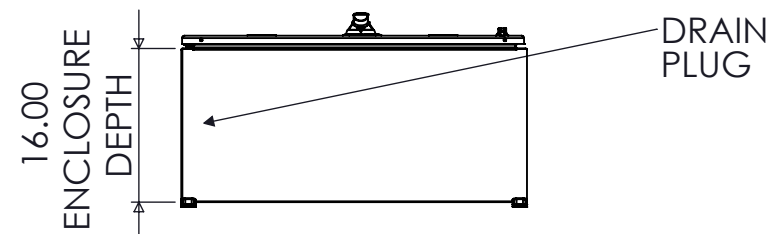


BOTTOM VIEW



9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM

400A SE-RATED 3-POLE NEMA 4X MANUAL TRANSFER SWITCH			
REV	DESCRIPTION	DATE	DRAWN / JG
0	ORIGINAL RELEASE	1/22/18	CHECKED
			SUP. NO
			SUP. BY NO
			PANEL NO
			BUIL. NO
			GROUP NO
			ORDER NO

DRAWING TYPE
DIMENSIONAL
 DRAWING NUMBER
STS400N4XSE3

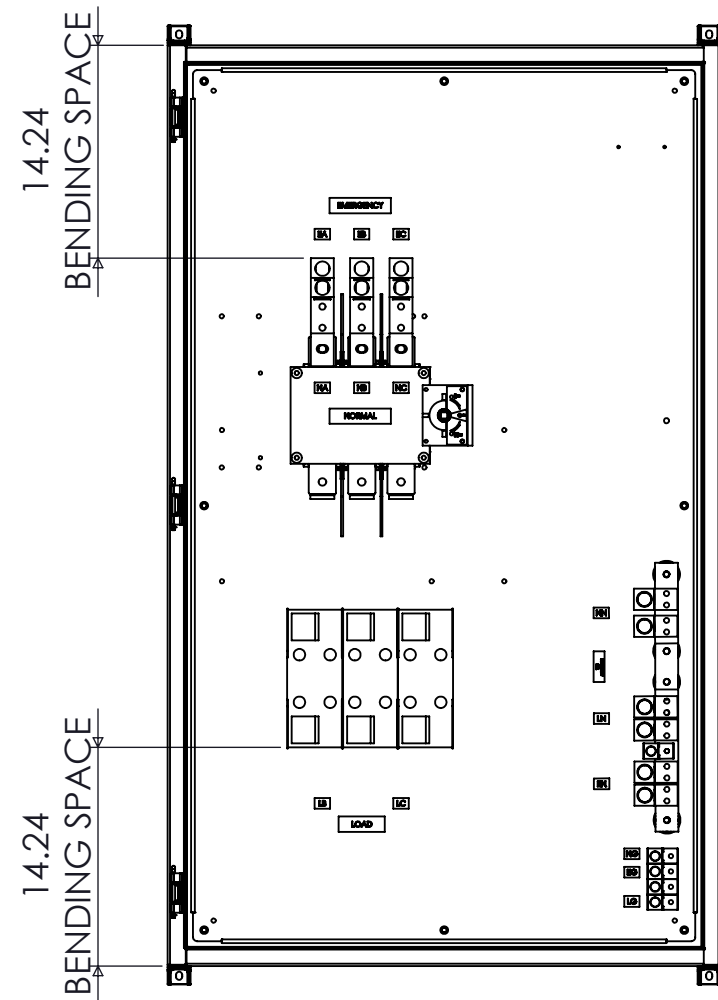


FRONT VIEW
DOOR REMOVED

LINE LUGS
(2) #2-600 MCM

400A MANUAL
TRANSFER SWITCH
I-O-II

400A
FUSEBLOCK
(1) #4-600 MCM
(2) #4-3/0 AWG

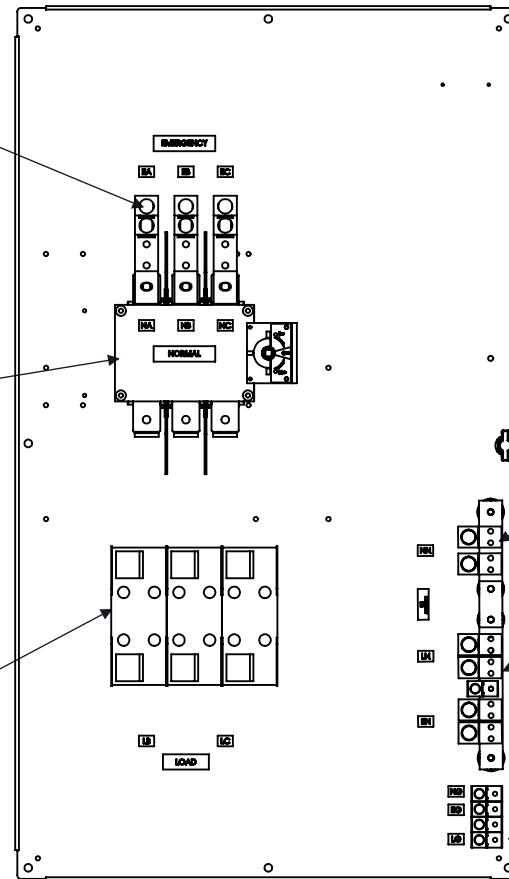

FRONT VIEW
ENCLOSURE REMOVED


"EMERGENCY"
CONNECTIONS
(REAR)

"NORMAL"
SUPPLY
(FRONT)

NEUTRAL LUGS
(2) #2-750 MCM

NEUTRAL
DISCONNECTING
MEANS

GROUND LUGS
(1) #6-350 MCM

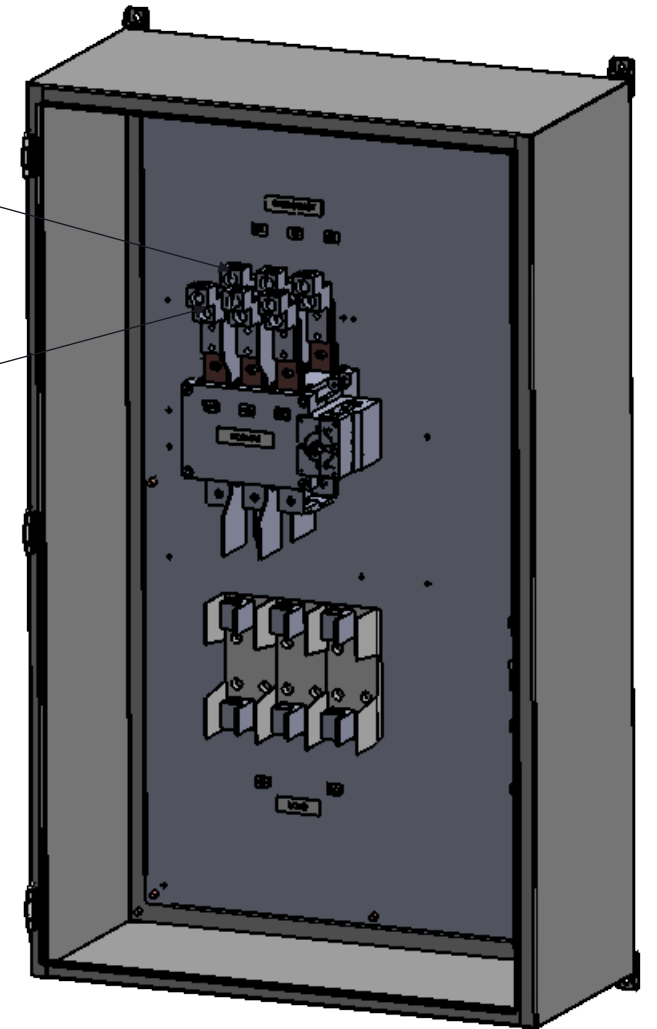

DIMETRIC VIEW
DOOR REMOVED

NOTE: FUSES PROVIDED IF PURCHASED
480-600VAC : LPJ-400SP

 9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM

400A SE-RATED 3-POLE NEMA 4X MANUAL TRANSFER SWITCH

REV	DESCRIPTION	DATE	DRAWN	JG	
0	ORIGINAL RELEASE	1/22/18	CHECKED		
			SUP. NO		DRAWING TYPE
			SUP. BY NO		DIMENSIONAL
			PANEL NO		DRAWING NUMBER
			BUL. NO		STS400N4XSE3
			GROUP NO		
			ORDER NO		