

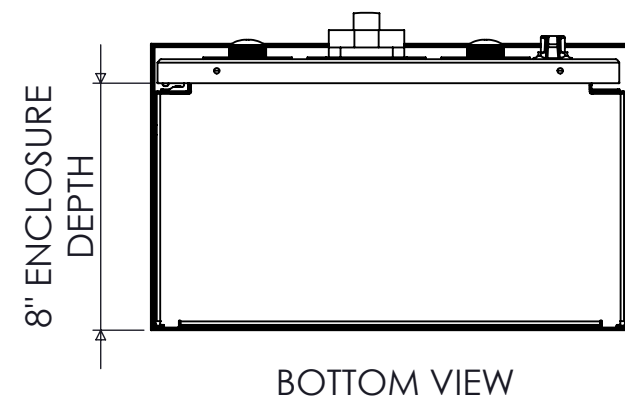
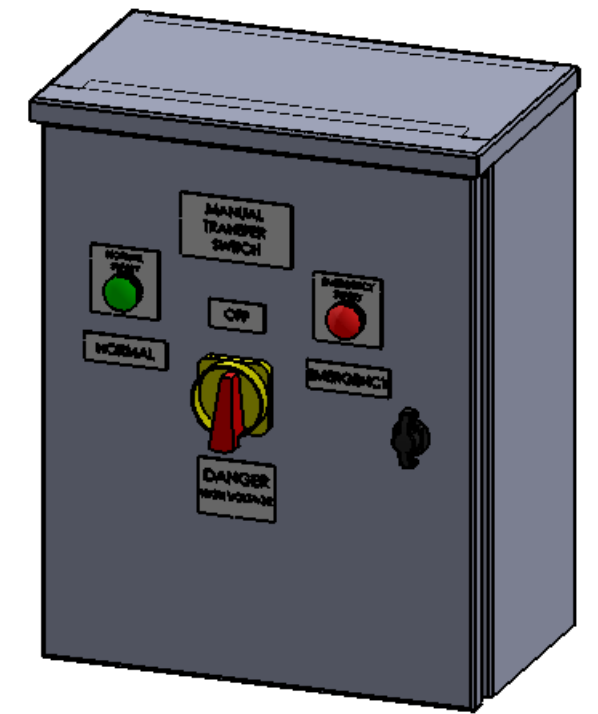
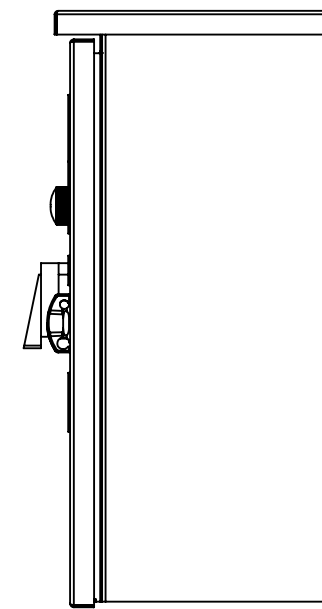
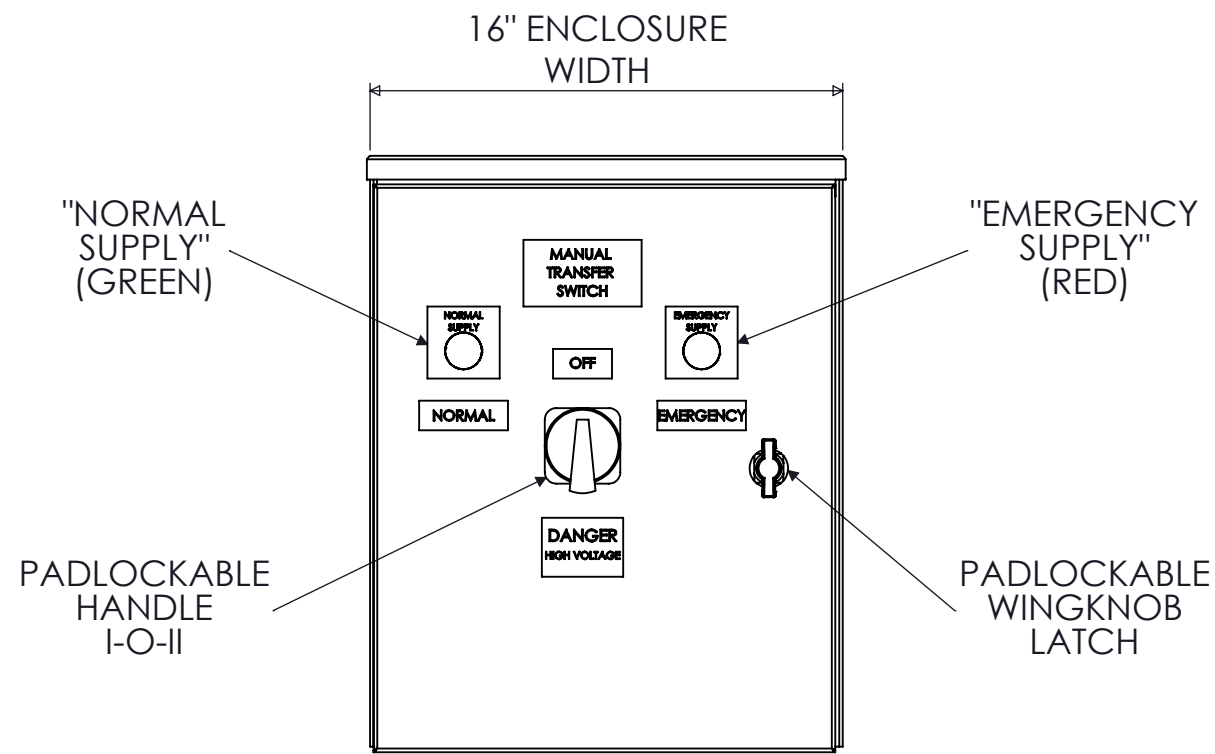


SPECIFICATIONS

MAX VOLTAGE - 600VAC 3 ϕ
 RATED CURRENT - 60 A
 STANDARDS - UL508A
 ENCLOSURE RATING - NEMA 3R
 REF. ES100145BF
 DURABILITY - 100,000 CYCLES
 EST SHIPPING WEIGHT - 50LBS

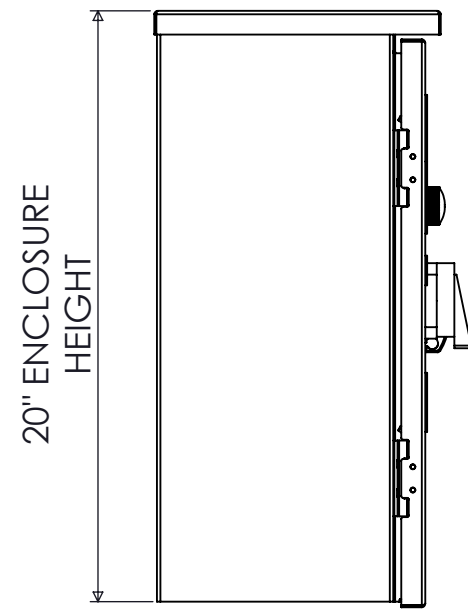


60A FUSIBLE 3-POLE NEMA 3R MANUAL TRANSFER SWITCH				
REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON
0	ORIGINAL RELEASE	7/24/14	CHECKED	
			SUP. NO	DRAWING TYPE
			SUP. BY NO	DIMENSIONAL
			PANEL NO	DRAWING NUMBER
			BUL. NO	STS60N3RBF3
			GROUP NO	
			ORDER NO	

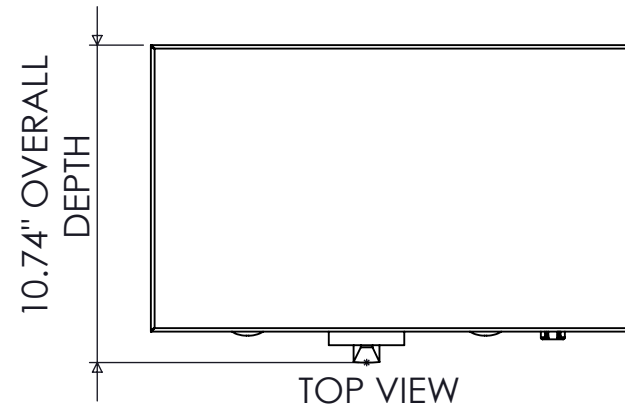

9900 TWIN LAKES PARKWAY
 CHARLOTTE, NC 28269
 704-596-5617
 PSICONTROLSOLUTIONS.COM


3.10"
ALLOW 3" MINIMUM
BENDING SPACE

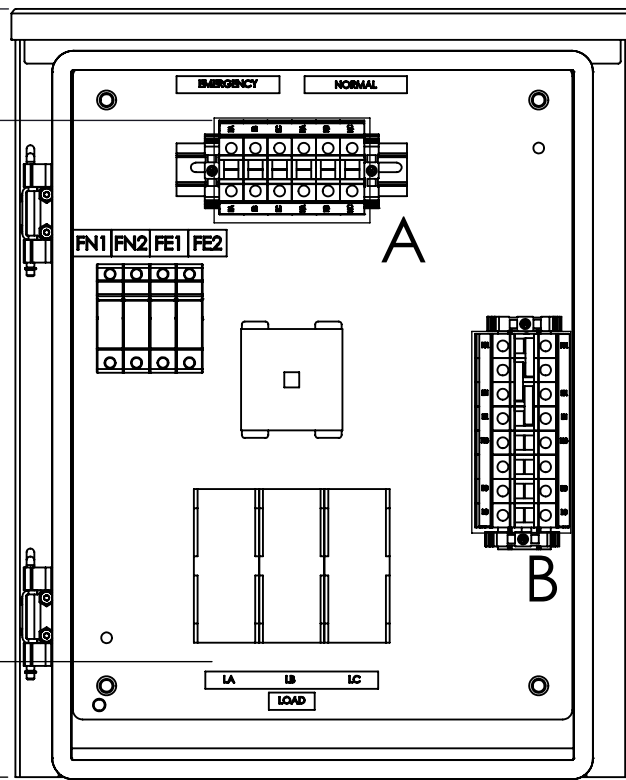

FRONT VIEW
DOOR REMOVED

3.00"
ALLOW 3" MINIMUM
BENDING SPACE

EA EB EC NA NB NC

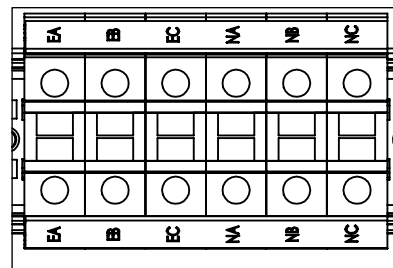


TERMINAL
LAYOUT
"A"

"EMERGENCY"
CONNECTIONS
(1) #14-1/0 AWG

PILOT LIGHT
FUSEHOLDERS
(4X)

60A MANUAL
TRANSFER SWITCH
I-O-II

60A
FUSEBLOCK
(1) #14-1/0 AWG

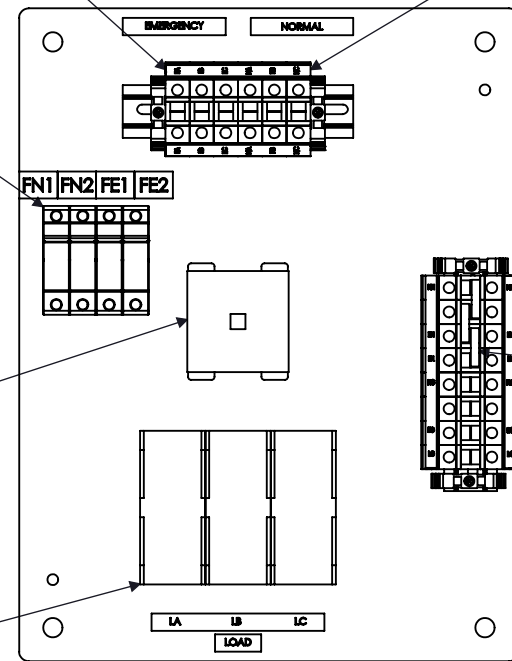


FRONT VIEW
ENCLOSURE REMOVED

"NORMAL"
CONNECTIONS
(1) #14-1/0 AWG

NEUTRAL
CONNECTIONS
(1) #14-1/0 AWG


NEUTRAL
DISCONNECTING
MEANS

GROUND
CONNECTIONS
(1) #14-1/0 AWG

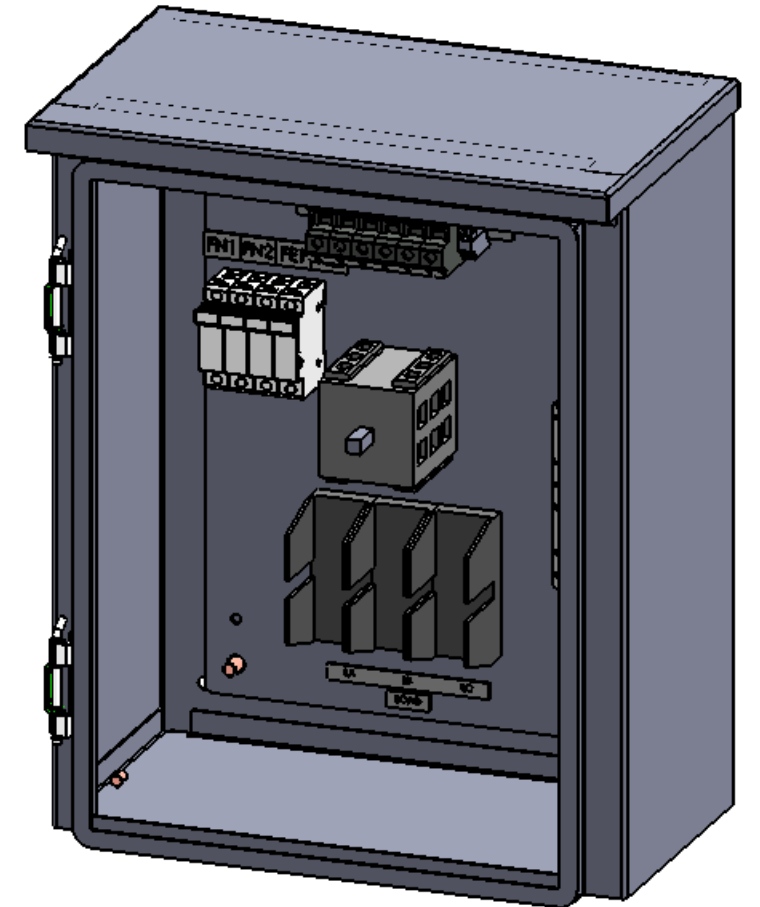

DIMETRIC VIEW
DOOR REMOVED

NN
EN
LN
NG
EG
LG

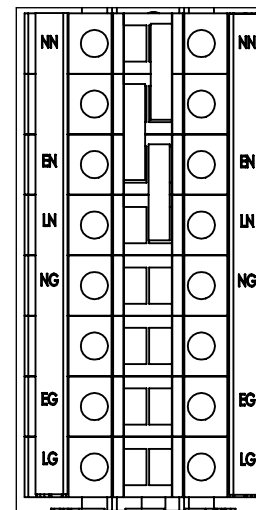

TERMINAL
LAYOUT
"B"

NOTE: FUSES PROVIDED IF PURCHASED
208-240VAC : FRN-R-60
480VAC : LPJ-60SP

60A FUSIBLE 3-POLE NEMA 3R MANUAL TRANSFER SWITCH					
REV	DESCRIPTION	DATE	DRAWN	S.RICHARDSON	
0	ORIGINAL RELEASE	7/24/14	CHECKED		
			SUP. NO		DRAWING TYPE
			SUP. BY NO		OUTLINE
			PANEL NO		DRAWING NUMBER
			BUL. NO		STS60N3RBF3
			GROUP NO		
			ORDER NO		


9900 TWIN LAKES PARKWAY
CHARLOTTE, NC 28269
704-596-5617
PSICONTROLSOLUTIONS.COM