



**SPECIFICATIONS**


MAX VOLTAGE - 600VAC 3Φ  
 RATED CURRENT - 800A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - NEMA 4X  
 TYPE 316 STAINLESS STEEL  
 EST. SHIPPING WEIGHT - 350LBS

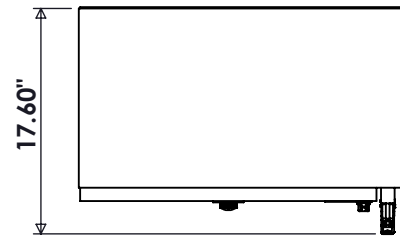


TOP VIEW

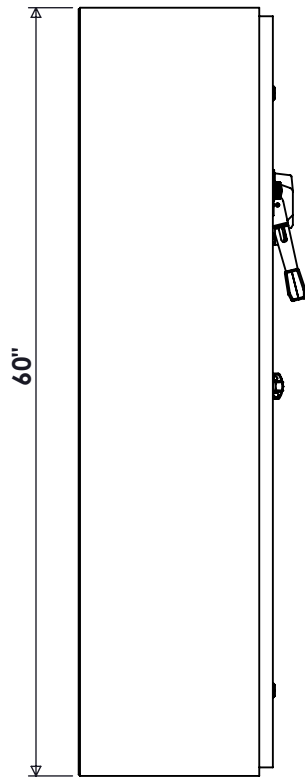


SIDE VIEW

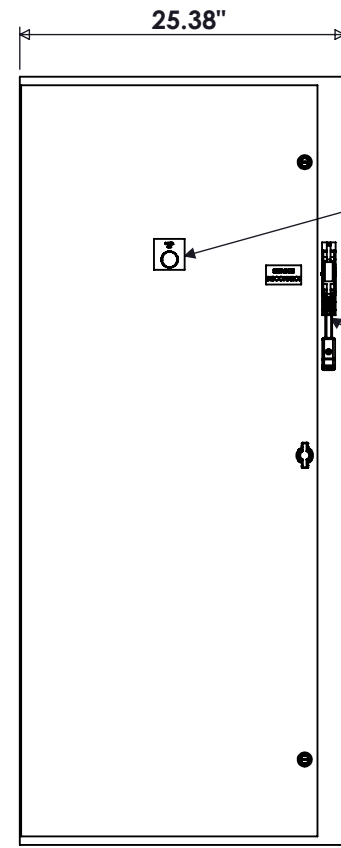

FRONT VIEW

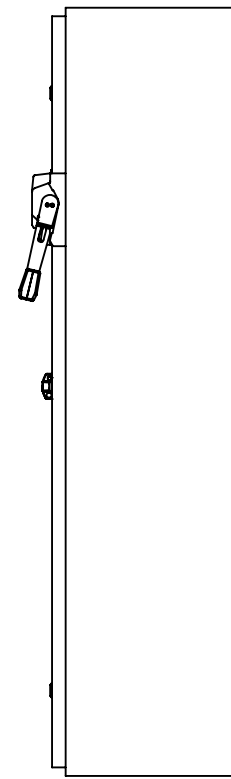


SIDE VIEW

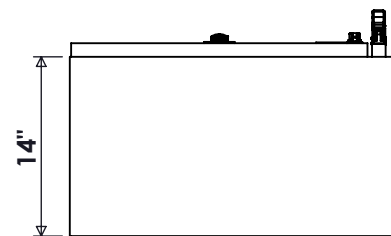

BOTTOM VIEW

**CONNECTIONS**

L1,L2,L3 - (3) 3/0-400MCM  
 T1,T2,T3 - (3) 3/0-400MCM  
 N - (4) #2-600MCM  
 G - (2) #6-350MCM

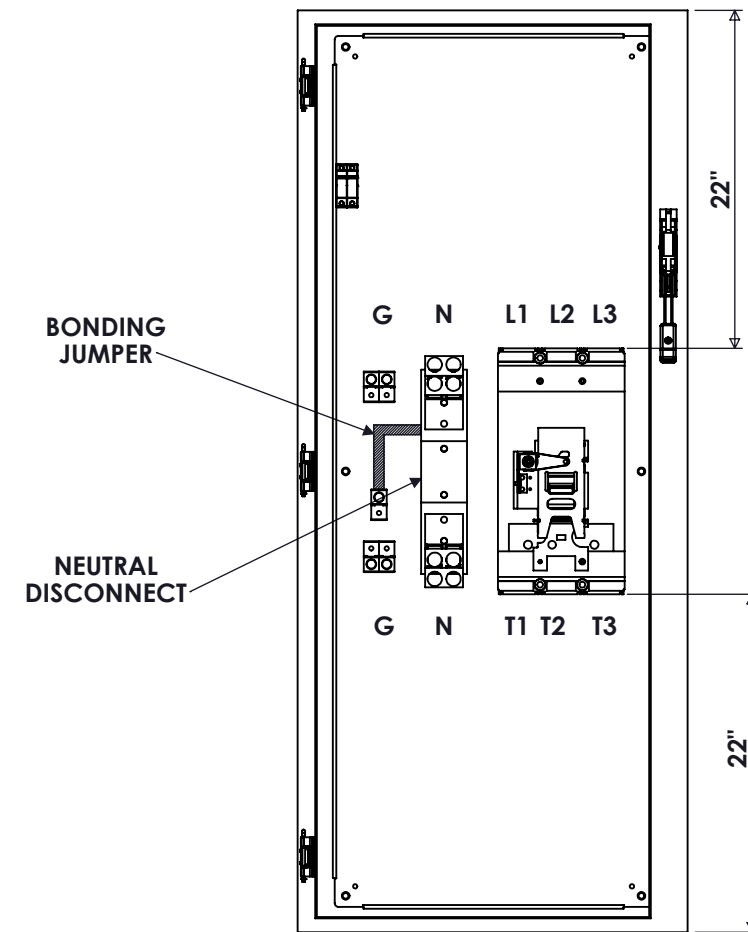

FRONT VIEW  
DOOR REMOVED

**BREAKER**  
 800A FRAME  
 800A TRIP  
 65kAIC @ 480V



9900 TWIN LAKES PARKWAY  
 CHARLOTTE, NC 28269  
 704-596-5617  
 PSICONTROLSOLUTIONS.COM

800A, 3-POLE ENCLOSED BREAKER NEMA 4X FLANGE HANDLE

| REV | DESCRIPTION      | DATE   | DRAWN      | S.RICHARDSON |
|-----|------------------|--------|------------|--------------|
| 0   | ORIGINAL RELEASE | 8/2/17 | CHECKED    | J.RAY        |
|     |                  |        | SUP. NO    |              |
|     |                  |        | SUP. BY NO |              |
|     |                  |        | PANEL NO   |              |
|     |                  |        | BUIL. NO   |              |
|     |                  |        | GROUP NO   |              |
|     |                  |        | ORDER NO   |              |

DRAWING TYPE  
**DIMENSIONAL**

DRAWING NUMBER  
**ECB800FN4XSE3**